

JIS C 3410 CABLE

# FA-DPYCY Double Core Flame Retardant Marine Power & Light Cable 0.6/1KV

- ISO9001 Supplier
- Class Certificate
- Export Supply

JIS C 3410-1999 Marine Power & Lighting Cable 0.6/1KV DPYCY Cable is double cores EPR Insulation PVC Sheath Galvanized Steel Wire Braided Cable with PVC Covering. 0.6/1KV FA-DPYCY Cable is double c...



Key Highlights	
<b>Category</b>	JIS C 3410 Cable
<b>Standard</b>	JIS
<b>Material</b>	Tinned Copper/EPR insulation/PVC sheath/Galvanized Steel Wire Braided/PV...
<b>Weight / Size</b>	IEC 60332-1 & IEC 60332-3 Category A Cores & Size Number of Conductor:
<b>Certificate</b>	LR, ABS,BV, GL, RINA, DNV, NK, KR, CCS
We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.	



Technical Specifications			
<b>Category</b>	JIS C 3410 Cable	<b>Model / SKU</b>	FA-DPYCY-Double-Core-Flame-Retardant-Marine-Power-Light-Cable-0-6-1KV
<b>Standard</b>	JIS	<b>Material</b>	Tinned Copper/EPR insulation/PVC sheath/Galvanized Steel Wire Braided/PVC Protective Covering
<b>Weight / Size</b>	IEC 60332-1 & IEC 60332-3 Category A Cores & Size Number of Conductor:	<b>Surface</b>	Galvanized
<b>Certificate</b>	LR, ABS,BV, GL, RINA, DNV, NK, KR, CCS	<b>Warranty</b>	12 Months unless specified otherwise
<b>Origin</b>	China		

CONTENTS		
■ China FA-DPYCY Double Core Flame Retardant Marine Power & Light Cable 0.6/1KV:	■ Cable Construction	
■ Standards	■ Cores & Size	
■ Feature	■ Maximum Working Voltage and Testing Voltage	
■ Minimum Bending Radius	■ Application:	

## China FA-DPYCY Double Core Flame Retardant Marine Power & Light Cable 0.6/1KV:


JIS C 3410-1999 Marine Power & Lighting Cable

0.6/1KV DPYCY Cable is double cores EPR Insulation PVC Sheath Galvanized Steel Wire Braided Cable with PVC Covering.

0.6/1KV FA-DPYCY Cable is double cores EPR Insulation PVC Sheath Galvanized Steel Wire Braided Flame Retardant Cable with PVC Covering.

## Cable Construction

Classification	Code	Construction details
Conductor	D	Tinned Copper Wire JIS C3410
Insulation	P	EPR as per JIS C 3410
Sheath	Y	PVC as per JIS C 3410
Aarmor	C	Galvanized steel wire braided



CB	Tinned copper wire braided	
Paint	The white paint should be painted uniformly	
Covering	Y	PVC as per JIS C 3410
Color: Black		

## Standards

Design : JIS C 3410(1999)

Flammability: IEC 60332-1 & IEC 60332-3 Category A

## Cores & Size

Number of Conductor: 2 Core

Size of Conductor (mm<sup>2</sup>): 1.5 2.5 4 6 10 16 25 35 50 70 95 120 150 185 240 300

## Feature

Halogen-free, Low Smoke, Flame retardant


## Maximum Working Voltage and Testing Voltage

Nominal voltage (V)	Maximum working voltage (V)		(Test voltage) V/min.
	a.c	d.c	
250V	250V	450V	1500/5
0.6/1 kV	0.6/1 kV	0.9/1.5kV	3500/5

## Minimum Bending Radius

The bending radius for the installation of cables should be not less than the values given as follows :

Type of cable		Minimum bending radius
Up to 1.8/3kV	Unarmored or unbraided	
	D ≤ 25mm	4XD
	D > 25mm	6XD
	Metal braid screened or armored	6XD
	Tape screened	8XD
3.6/6kV	Single core	12XD
above	3-core	9XD

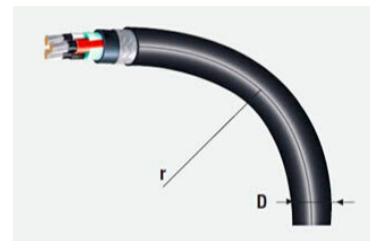

NOTE) D : Overall diameter of cable

## **Application:**

The cable is fixed installation, used for power, lighting and control in most area and open deck area in ship.

