

**ELECTRICAL CONNECTORS**

# FHH202 Explosion Proof Switch

The scope of application Mainly used for electric connection, circuit connected with the breaker for all kinds of ships, offshore oil, chemical industry and other places which may accumulate inflammable and explosi...

- ISO9001 Supplier
- Class Certificate
- Export Supply



**Key Highlights**

<b>Category</b>	Electrical Connectors
<b>Standard</b>	EN
<b>Weight / Size</b>	Code Weight(kg) FHH202-1 2 FHH202-2 2 FHH202-3 2.1 FHH202-4 2.2 FHH202-3...
<b>Certificate</b>	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

## Technical Specifications

<b>Category</b>	Electrical Connectors	<b>Model / SKU</b>	FHH202-Explosion-Proof-Switch
<b>Standard</b>	EN	<b>Weight / Size</b>	Code Weight(kg) FHH202-1 2 FHH202-2 2 FHH202-3 2.1 FHH202-4 2.2 FHH202-3 Switch Photo
<b>Certificate</b>	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	<b>Warranty</b>	12 Months unless specified otherwise
<b>Origin</b>	China		

<b>CONTENTS</b>	<ul style="list-style-type: none"> <li>■ The scope of application</li> <li>■ FHH202-3 Switch Photo</li> </ul>	<ul style="list-style-type: none"> <li>■ Products feature and products certification</li> </ul>
-----------------	---	---


## The scope of application

Mainly used for electric connection, circuit connected with the breaker for all kinds of ships, offshore oil, chemical industry and other places which may accumulate inflammable and explosive gas.

## Products feature and products certification

Flame proof and increased safety type of explosion-proof switch, Explosion proof marked IICT6, it can work normally under the temperature -20 "C ~ +50 "C. The shell is made of high strength high quality brass precision manufacturing forming. With good electrical properties and good waterproof performance. Protection class: P56.Voltage:380v Current:16A. Cable outside diameter is diameter 13mm.

This lamp has been inspected and certified by China National Lighting Fitting Quality Supervision Testing center and National Supervision and Examination Center for Explosion protected and Safety of Luminaire (NECESL).

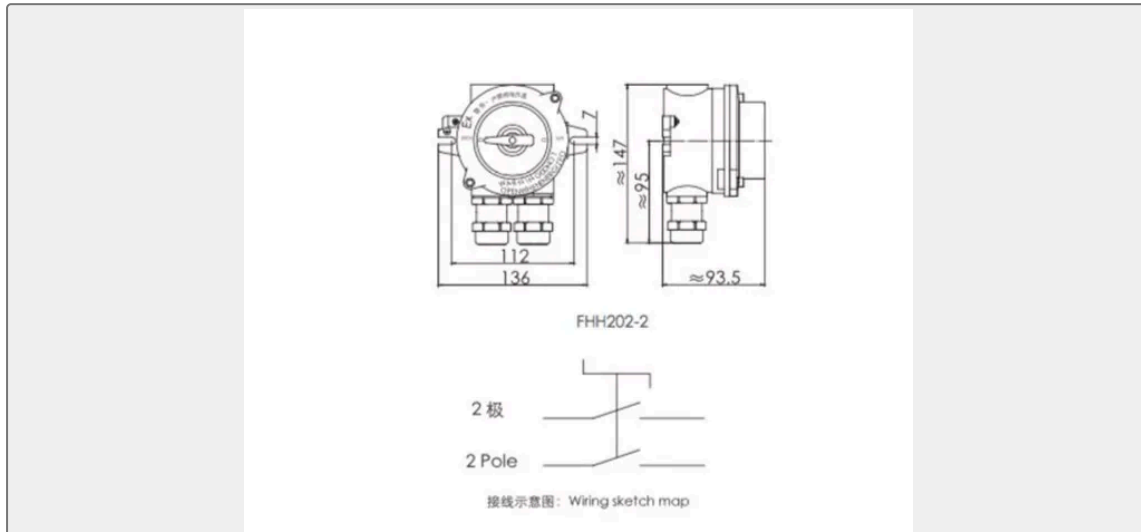

Code	Weight(kg)
FHH202-1	2
FHH202-2	2
FHH202-3	2.1
FHH202-4	2.2

## FHH202-3 Switch Photo



