MARINE FLUORESCENT LIGHTS


Fluorescent Pendant Light JCY27-1

Used to illumination of water dripping, water spattering, water coagulating place in ships such as oven cabin, dry cabin tunnel, pipeline and weather deck, environment temperature is -20°C~+55°C.

ISO9001 Supplier

Class Certificate

Export Supply

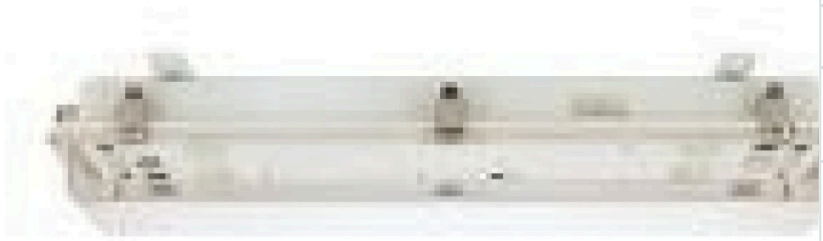

Key Highlights

Category	Marine Fluorescent Lights
Standard	EN
Material	Steel Plate, PC Material and Seal Structure
Weight / Size	Type JCY27-1 JCY27-2 JCY27-1B JCY27-2B Voltage 110V/60Hz, 220V/50Hz, 220...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	Marine Fluorescent Lights	**Model / SKU**	Fluorescent-Pendant-Light-JCY27-1
Standard	EN	**Material**	Steel Plate, PC Material and Seal Structure
Weight / Size	Type JCY27-1 JCY27-2 JCY27-1B JCY27-2B Voltage 110V/60Hz, 220V/50Hz, 220V/60Hz Power Factor >0.85 Lamp Holder G13 Cable Diameter Dia8mm-16mm Protection Class IP67 Power 1x20W 1x20W 1X20W 2X20W Weight 7.2kg 7.2kg 7.2kg 7.2kg	**Certificate**	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
Warranty	12 Months unless specified otherwise	**Origin**	China

CONTENTS

- China Fluorescent Pendant Light JCY27-1:
- Main Specification:
- Standards:

China Fluorescent Pendant Light JCY27-1:



Used to illumination of water dripping, water spattering, water coagulating place in ships such as oven cabin, dry cabin tunnel, pipeline and weather deck, environment temperature is -20°C~+55°C.

Standards:

Confirm to IEC600092-306-2009 and GRADE ENTRY NORMS FOR STEEL SHIPS.

Our product approved by the CCS(China Classification Society)

Main Specification:

Type	JCY27-1	JCY27-2	JCY27-1B	JCY27-2B
Voltage	110V/60Hz, 220V/50Hz, 220V/60Hz			
Power Factor	>0.85			
Lamp Holder	G13			
Cable Diameter	Dia8mm-16mm			
Protection Class	IP67			
Power	1x20W	1x20W	1X20W	2X20W
Weight	7.2kg	7.2kg	7.2kg	7.2kg