

# Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

## MARINE FLUORESCENT LIGHTS


# Fluorescent Pendant Light with Battery JCY201-1

ISO9001 Supplier

Class Certificate

Export Supply

Used to illumination of water dripping, water spattering, water coagulating place in ships, such as oven cabin, tunnel pipeline and weather deck etc. The working enviroment temperature is -20°C~+55°C

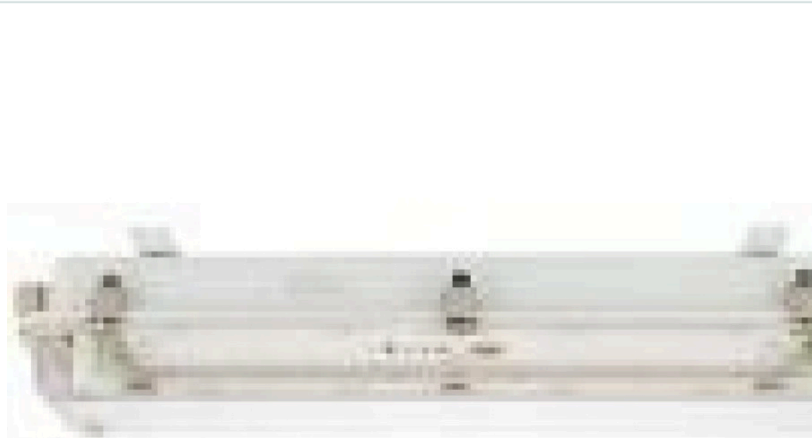

### Key Highlights

<b>Category</b>	Marine Fluorescent Lights
<b>Standard</b>	EN
<b>Material</b>	Confirm to IEC600092-306-2009 and GRADE ENTRY NORMS FOR STEEL SHIPS.
<b>Weight / Size</b>	Type JCY201-1 JCY201-2 JCY401-1 JCY401-2 Voltage 110V/60Hz, 220V/50Hz, 2...
<b>Certificate</b>	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.



Technical Specifications			
<b>Category</b>	Marine Fluorescent Lights	<b>Model / SKU</b>	Fluorescent-Pendant-Light-with-Battery-JCY201-1
<b>Standard</b>	EN	<b>Material</b>	Confirm to IEC600092-306-2009 and GRADE ENTRY NORMS FOR STEEL SHIPS.
<b>Weight / Size</b>	Type JCY201-1 JCY201-2 JCY401-1 JCY401-2 Voltage 110V/60Hz, 220V/50Hz, 220V/60Hz Power Factor >0.85 Lamp Holder G13 Cable Diameter Dia14mm-16mm Protection Class IP67 Power 2x20W 2x20W 2x40W 2x40W Weight 7.5kg 7.5kg 11.3kg 11.3kg Emergency Way JCY202-2, JCY402-2:	<b>Certificate</b>	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
<b>Warranty</b>	12 Months unless specified otherwise	<b>Origin</b>	China

<b>CONTENTS</b>	<ul style="list-style-type: none"> <li>■ China Fluorescent Pendant Light with Battery JCY201-1:</li> <li>■ Main Specification:</li> </ul>	<ul style="list-style-type: none"> <li>■ Standards:</li> </ul>
-----------------	---	--

## China Fluorescent Pendant Light with Battery JCY201-1:



Used to illumination of water dripping, water spattering, water coagulating place in ships, such as oven cabin, tunnel pipeline and weather deck etc. The working environment temperature is -20°C~+55°C

### Standards:

Confirm to IEC600092-306-2009 and GRADE ENTRY NORMS FOR STEEL SHIPS.

### Main Specification:



Type	JCY201-1	JCY201-2	JCY401-1	JCY401-2
Voltage	110V/60Hz, 220V/50Hz, 220V/60Hz			
Power Factor	>0.85			
Lamp Holder	G13			
Cable Diameter	Dia14mm-16mm			
Protection Class	IP67			
Power	2x20W	2x20W	2x40W	2x40W
Weight	7.5kg	7.5kg	11.3kg	11.3kg
Emergency Way	JCY202-2, JCY402-2: Bulb Emergency			
	JCY201-2, JCY401-2: Tube Emergency			