

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

MARINE SHAFT

GCD Bulkhead transmission devices

It is suitable for transmission of power between airtight cabins of small and medium vessels. The device conform to ship's requirement. It is suitable for the pump shaft of vessel that transport crude oil, petroleum, che...

ISO9001 Supplier

Class Certificate

Export Supply




Key Highlights

Category	Marine Shaft
Standard	EN
Weight / Size	Model cooling water consumption (m3/h) L H B L1 L2 D R D1 Weight(kg) Inl...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS


We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications			
Category	Marine Shaft	Model / SKU	GCD-Bulkhead-transmission-devices
Standard	EN	Weight / Size	Model cooling water consumption (m3/h) L H B L1 L2 D R D1 Weight(kg) Inlet and outlet of cooling water GCD-30 1 580 550 420 280 58 235 187.5 Ø30 100 M14x1.5 GCD-40 1 640 550 420 310 82 235 187.5 Ø40 109 GCD-50 1 680 550 420 330 82 235 187.5 Ø50 126 GCD-60 1 720 550 420 350 105 295 187.5 Ø60 133 GCD-70 1 760 550 420 380 105 295 187.5 Ø70 150 GCD-80 1 800 550 420 390 130 295 187.5 Ø80 180 GCD-90 1.5 880 550 420 410 130 295 187.5 Ø90 230 GCD-100 1.5 930 670 540 480 165 351 245 Ø100 260
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

China GCD Bulkhead transmission devices:

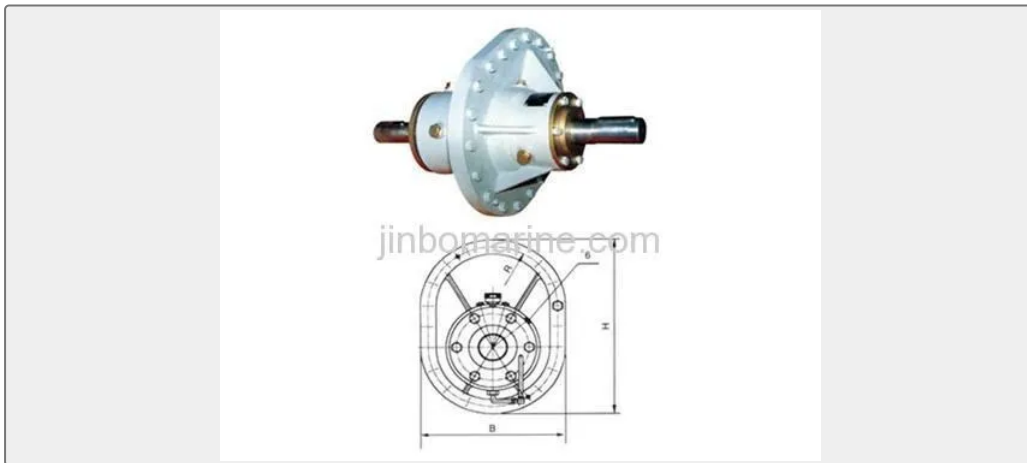

It is suitable for transmission of power between airtight cabins of small and medium vessels. The device conform to ship's requirement. It is suitable for the pump shaft of vessel that transport crude oil, petroleum, chemical liquid, or other shafting through engine room, watertight bulkhead.

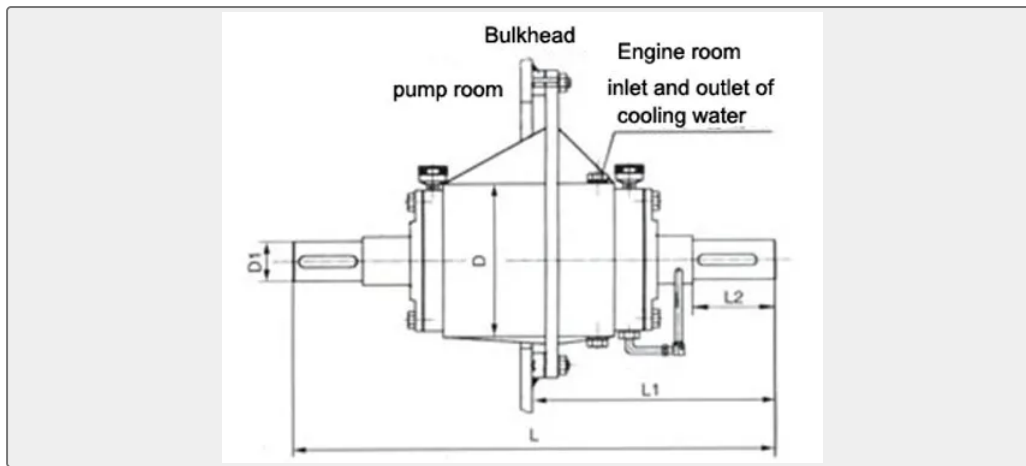

Model	cooling water consumption (m ³ /h)	L	H	B	L1	L2	D	R	D1	Weight(kg)	Inlet and outlet of cooling water
GCD-30	1	580	550	420	280	58	235	187.5	Ø30	100	M14x1.5
GCD-40	1	640	550	420	310	82	235	187.5	Ø40	109	
GCD-50	1	680	550	420	330	82	235	187.5	Ø50	126	
GCD-60	1	720	550	420	350	105	295	187.5	Ø60	133	
GCD-70	1	760	550	420	380	105	295	187.5	Ø70	150	
GCD-80	1	800	550	420	390	130	295	187.5	Ø80	180	
GCD-90	1.5	880	550	420	410	130	295	187.5	Ø90	230	
GCD-100	1.5	930	670	540	480	165	351	245	Ø100	260	