


RUDDER STOCK SEAL

Gliding Water Tight Lower Rudder Carrier CB*790-87

- ISO9001 Supplier
- Class Certificate
- Export Supply

Product Advantage This lower rudder bearer is used together with CB*789 upper rudder bearer and has a good sand prevention effect Type Dimensions ...

 <p>jinbomarine.com</p>	Key Highlights	
	Category	Rudder Stock Seal
	Standard	DIN
	Weight / Size	Product Advantage This lower rudder bearer is used together with CB*789 ...
	Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
<p>We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.</p>		




Technical Specifications

Category	Rudder Stock Seal	Model / SKU	Gliding-Water-Tight-Lower-Rudder-Carrier-CB-790-87
-----------------	-------------------	--------------------	--




Standard	DIN	Weight / Size	Product Advantage This lower rudder bearer is used together with CB*789 upper rudder bearer and has a good sand prevention effect
			Type Dimensions (mm) d D H L h A 50 50 100 123 60 26 60 60 110 136 70 28 70 70 125 152 85 28 80 80 140 162 95 28 90 90 155 177 110 28 100 100 160 216 130 37 110 110 170 226 140 37 120 120 190 236 150 37 130 130 205 246 160 37 140 140 220 255 170 37 150 150 240 282 195 37 160 160 250 297 210 37 170 170 260 307 220 37 180 180 272 330 235 40 190 190 292 345 250 40 200 200 310 359 260 44 220 220 340 385 286 44 240 240 370 411 312 44 260 260 400 448 338 45 280 280 430 474 364 50 300 300 456 500 390 50 320 320 486 530 420 50 340 340 512 552 442 50 360 360 540 580 470 50 380 380 568 605 495 50 400 400 600 630 520 50 420 420 634 687 550 62.5 440 440 662 712 575 62.5 460 460 690 737 600 62.5 480 480 720 762 625 62.5 500 500 750 787
			650 62.5 Type Dimensions (mm) d D H L h B 50 50 100 124 60 26 60 60 110 138 70 28 70 70 125 153 85 28 80 80 140 163 95 28 90 90 155 178 110 28 100 100 160 220 130 37 110 110 170 230 140 37 120 120 190 250 150 37 130 130 205 260 160 37 140 140 220 285 170 37 150 150 240 300 195 37 160 160 250 310 210 37 170 170 260 330 220 37 180 180 272 348 235 40 190 190 292 366 250 40 200 200 310 392 260 44 220 220 340 418 286 44 240 240 370 458 312 44 260 260 400 484 338 45 280 280 430 510 364 50 300 300 456 540 390 50 320 320 486 562 420 50 340 340 512 590 442 50 360 360 540 615 470 50 380 380 568 640 495 50 400 400 600 700 520 50 420 420 634 725 550 62.5 440 440 662 750 575 62.5 460 460 690 775 600 62.5 480 480



			720 800 625 62.5 500 500 750 787 650 62.5
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		


Product Advantage

This lower rudder bearer is used together with CB*789 upper rudder bearer and has a good sand prevention effect

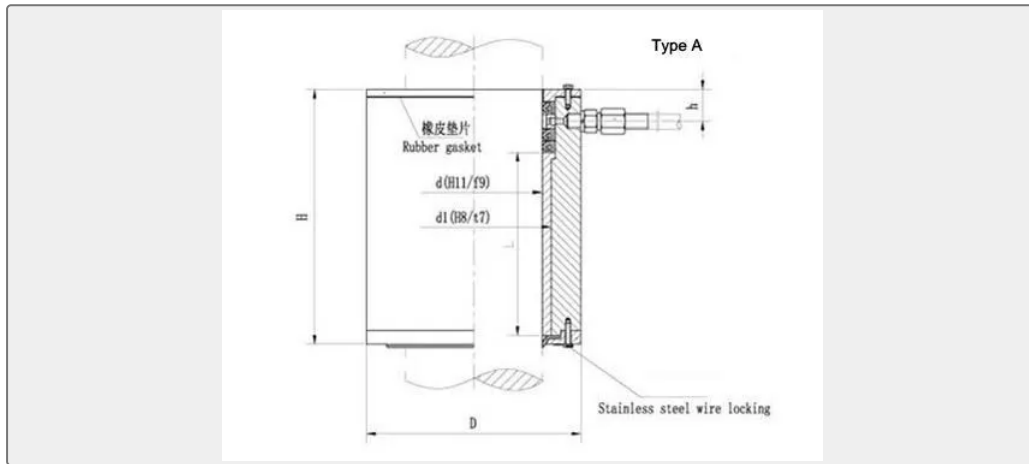

Type	Dimensions (mm)					
	d	D	H	L	h	

A	50	50	100	123	60	26
	60	60	110	136	70	28
	70	70	125	152	85	28
	80	80	140	162	95	28
	90	90	155	177	110	28
	100	100	160	216	130	37
	110	110	170	226	140	37
	120	120	190	236	150	37
	130	130	205	246	160	37
	140	140	220	255	170	37
	150	150	240	282	195	37
	160	160	250	297	210	37
	170	170	260	307	220	37
	180	180	272	330	235	40
	190	190	292	345	250	40
	200	200	310	359	260	44
	220	220	340	385	286	44
	240	240	370	411	312	44
	260	260	400	448	338	45
	280	280	430	474	364	50
	300	300	456	500	390	50
	320	320	486	530	420	50
	340	340	512	552	442	50
	360	360	540	580	470	50
	380	380	568	605	495	50
	400	400	600	630	520	50
	420	420	634	687	550	62.5
	440	440	662	712	575	62.5
	460	460	690	737	600	62.5
	480	480	720	762	625	62.5
	500	500	750	787	650	62.5

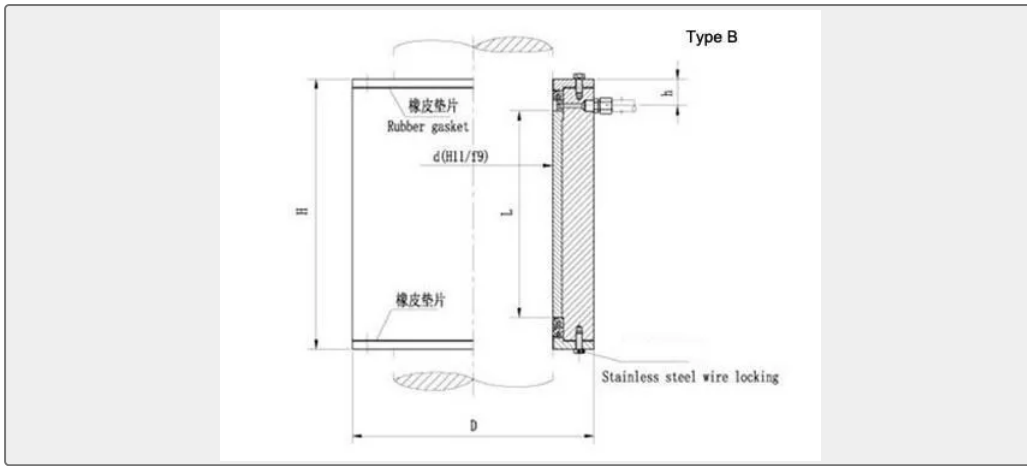

Type	Dimensions (mm)				
	d	D	H	L	h

B	50	50	100	124	60	26
	60	60	110	138	70	28
	70	70	125	153	85	28
	80	80	140	163	95	28
	90	90	155	178	110	28
	100	100	160	220	130	37
	110	110	170	230	140	37
	120	120	190	250	150	37
	130	130	205	260	160	37
	140	140	220	285	170	37
	150	150	240	300	195	37
	160	160	250	310	210	37
	170	170	260	330	220	37
	180	180	272	348	235	40
	190	190	292	366	250	40
	200	200	310	392	260	44
	220	220	340	418	286	44
	240	240	370	458	312	44
	260	260	400	484	338	45
	280	280	430	510	364	50
	300	300	456	540	390	50
	320	320	486	562	420	50
	340	340	512	590	442	50
	360	360	540	615	470	50
	380	380	568	640	495	50
	400	400	600	700	520	50
420	420	634	725	550	62.5	
440	440	662	750	575	62.5	
460	460	690	775	600	62.5	
480	480	720	800	625	62.5	
500	500	750	787	650	62.5	