

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

COMBUSTIBLE GAS ALARM SYSTEM

Gn9016 Combustible Gas Controller

Gn9016 Combustible Gas Controller 1)Chapters 1 and 2, Part Four of China Classification Society Rules for Classification of Sea-going Steel Ships 2)Chapter 3, Part Six of China Classification Society Rules for Cla...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Combustible Gas Alarm System
Standard	GB
Material	Gn9016 Combustible Gas Controller 1)Chapters 1 and 2, Part Four of China...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.




Technical Specifications			
Category	Combustible Gas Alarm System	Model / SKU	Gn9016-Combustible-Gas-Controller
Standard	GB	Material	Gn9016 Combustible Gas Controller 1)Chapters 1 and 2, Part Four of China Classification Society Rules for Classification of Sea-going Steel Ships 2)Chapter 3, Part Six of China Classification Society Rules for Classification of Sea-going Steel Ships 3)Regulations 4, Chapter II-2 of International Convention for the Safety of Life at Sea, 1974, as Amended 4) GB 16808-2008 Combustible Gas Alarm Control Units 5) IEC 60079-29-1:2016+AMD1:2020 Explosive atmospheres -Part 29-1:
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

China Gn9016 Combustible Gas Controller:

Gn9016 Combustible Gas Controller

- 1)Chapters 1 and 2, Part Four of China Classification Society Rules for Classification of Sea-going Steel Ships
- 2)Chapter 3, Part Six of China Classification Society Rules for Classification of Sea-going Steel Ships
- 3)Regulations 4, Chapter II-2 of International Convention for the Safety of Life at Sea, 1974, as Amended
- 4) GB 16808-2008 Combustible Gas Alarm Control Units
- 5) IEC 60079-29-1:2016+AMD1:2020 Explosive atmospheres -Part 29-1: Gas detectors -Performance requirements of detectors for flammable gases.

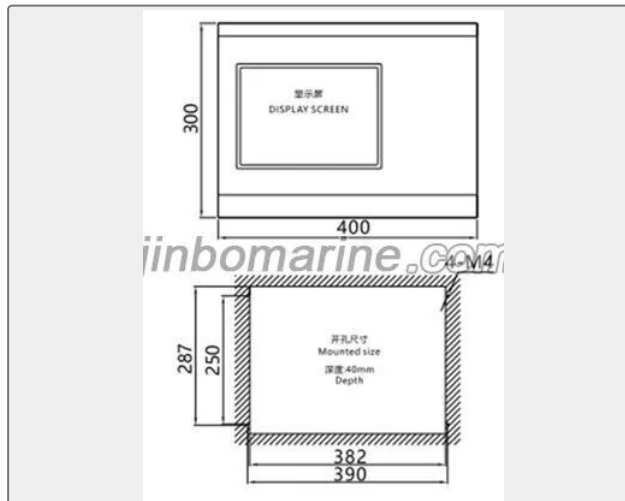

Signal input	4~20mA/4~20mA SIGNAL	Operating	Touchscreen
Display range	DIGITAL:0~99999 ,UNIT:%LEL.,ppm、 %Vol	Automatic detection	Line disconnection/short circuit,various state detection functions such as detectors,etc
Precision	±1%FS	Alarm setting	The low limit and high limit are two stages of alarm,which can be adjusted
Power supply	AC220V±20%/50Hz	Alarm method	Local sound.light alarm
Standby power	DC24V±10%	Ip rating	IP32
Power	15W	Operating temperature	-20°C~50°C
Maximum power	150W	Relative humidity	0~95%RH(Non-condensation)
Display	7-Inch ledcolor Display Icd display(800x480)		