

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

MARINE LEVEL GAUGE

HB-SPCG Type Self-operated Dial Plate Level Gauge


ISO9001 Supplier

Class Certificate

Export Supply

Product Description: It consists of sensor, capillary tube and displayer etc. widely used for diesel oil, lubricating oil, heavy fuel oil, solvents, gas, oil, water and other non-corrosive liquid.

Main technical spe...



Key Highlights	
Category	Marine Level Gauge
Standard	JIS
Material	120% of the maximum measure range Dial diameter:150 mm Casing material:
Weight / Size	Model Applicable medium Connection size Accuracy Capillary tube length M...
Certificate	CCS, GL, LR, BV, ABS, DNV GL, RINA, NK, KR ETC.
We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.	

 0.046880s

Technical Specifications			
Category	Marine Level Gauge	Model / SKU	HB-SPCG-Type-Self-operated-Dial-Plate-Level-Gauge
Standard	JIS	Material	120% of the maximum measure range Dial diameter:150 mm Casing material:
Weight / Size	Model Applicable medium Connection size Accuracy Capillary tube length Material Low viscosity High viscosity Displayer Capillary tube Diaphragm HB- SPCG-150V Normal liquid 5K,10K25A 5K,10K40A Grade 6 ≥1m ≤8m AC or SUS304 SUS304 QBe2.0 HB-SPCG-150S JIS 5K,10K 100A GB2506-2005 DN100 PN6	Certificate	CCS,GL,LR,BV,ABS,DNV GL,RINA,NK,KR ETC.
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS	<ul style="list-style-type: none"> ■ Product Description: ■ Standard Model And Specification: 	<ul style="list-style-type: none"> ■ Main technical specification:
-----------------	-----------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------

Product Description:

It consists of sensor, capillary tube and displayer etc. widely used for diesel oil, lubricating oil, heavy fuel oil, solvents, gas, oil, water and other non-corrosive liquid.

Main technical specification:


Range: 1 to 50 meter

Accuracy: grade 1.6

Overload: 120% of the maximum measure range

Dial diameter: 150 mm

Casing material: SUS304 or aluminium alloy

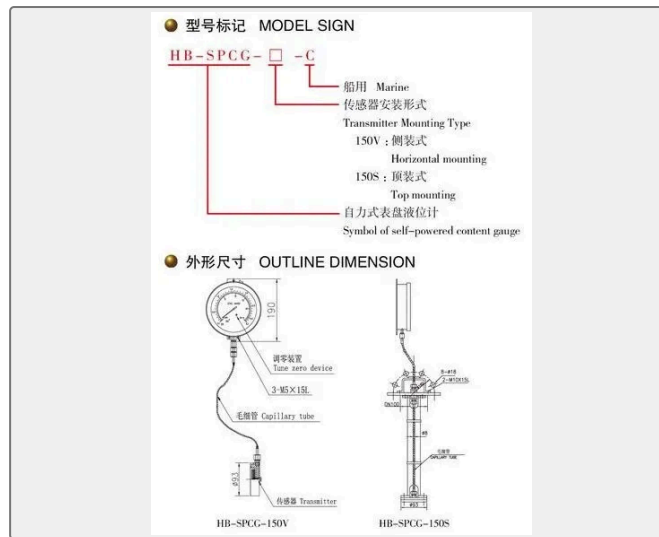

Standard Model And Specification:

Model	Applicable medium	Connection size		Accuracy	Capillary tube length	Material		
		Low viscosity	High viscosity			Displayer	Capillary tube	Diaphragm
HB-SPCG-150V	Normal liquid	5K,10K25 A	5K,10K40A	Grade 6	≥1m ≤8m	AC or SUS304	SUS304	QBe2.0
HB-SPCG-150S		JIS 5K,10K 100A GB2506-2005 DN100 PN6						