

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

NAVIGATION BUOY

HD160-B LED Lantern

Type HD160-B1 HD160-B2 HD160-B3 Voltage DC12V DC12V DC12V ...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights


Category	Navigation Buoy
Standard	EN
Weight / Size	Type HD160-B1 HD160-B2 HD160-B3 Voltage DC12V DC12V DC12V Power 3W 5W 7W...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.



Technical Specifications			
Category	Navigation Buoy	Model / SKU	HD160-B-LED-Lantern
Standard	EN	Weight / Size	Type HD160-B1 HD160-B2 HD160-B3 Voltage DC12V DC12V DC12V Power 3W 5W 7W Source LED Navigation LED Navigation LED Navigation Range >3mm >4.2mm >5.4mm Characteristic 256 program 256 program 256 program Color Red, Yellow, Green, White Red, Yellow, Green, White Red, Yellow, Green, White Optical sensitivity 300LX 300LX 300LX Working Environment Outdoor, Waterproof Outdoor, Waterproof Outdoor, Waterproof Protection IP65 IP65 IP65 Working Temperature -40-70°C -40-70°C -40-70°C Installation 4-Φ20/Φ195mm 4-Φ20/Φ195mm 4-Φ20/Φ195mm Weight 3kg 3kg 3kg Please contact us for more details.
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

China HD160-B LED Lantern:

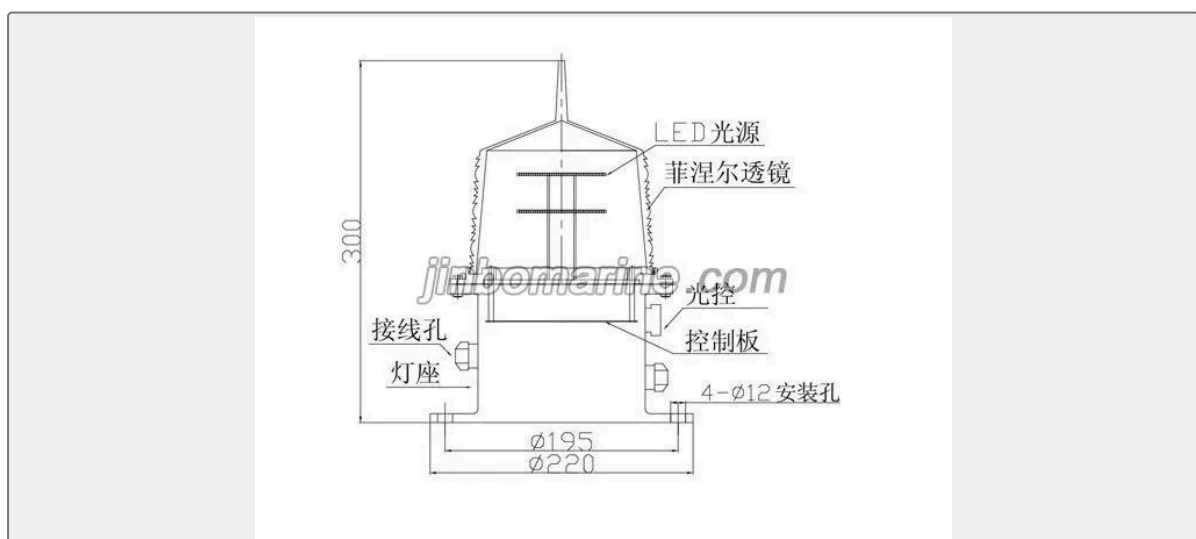

Type	HD160-B1	HD160-B2	HD160-B3
Voltage	DC12V	DC12V	DC12V



Power	3W	5W	7W
Source	LED Navigation	LED Navigation	LED Navigation
Range	>3mm	>4.2mm	>5.4mm
Characteristic	256 program	256 program	256 program
Color	Red, Yellow, Green, White	Red, Yellow, Green, White	Red, Yellow, Green, White
Optical sensitivity	300LX	300LX	300LX
Working Environment	Outdoor, Waterproof	Outdoor, Waterproof	Outdoor, Waterproof
Protection	IP65	IP65	IP65
Working Temperature	-40-70°C	-40-70°C	-40-70°C
Installation	4- Φ 20/ Φ 195mm	4- Φ 20/ Φ 195mm	4- Φ 20/ Φ 195mm
Weight	3kg	3kg	3kg

Please contact us for more details.