


**HIGH PRESSURE PUMP**

# HLD030 Series Hydraulic Jack

HLD030 Series Hydraulic Jack HLD Series Hydraulic Jack Interchangeable Hydraulic Tensioner Strong versatility, suitable for stretching multiple specifications of bolts by replacing the stretching head. ...

- ISO9001 Supplier
- Class Certificate
- Export Supply



**Key Highlights**

|                      |   |
|----------------------|---|
| <b>Category</b>      | High Pressure Pump  |
| <b>Standard</b>      | EN  |
| <b>Weight / Size</b> | Economically efficient, lightweight, and highly accurate. |
| <b>Certificate</b>   | ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS                |

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

| Technical Specifications |  |                      |   |
|--------------------------|--|----------------------|---|
| <b>Category</b>          | High Pressure Pump                         | <b>Model / SKU</b>   | HLD030-Series-Hydraulic-Jack                              |
| <b>Standard</b>          | EN   | <b>Weight / Size</b> | Economically efficient, lightweight, and highly accurate. |
| <b>Certificate</b>       | ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS | <b>Warranty</b>      | 12 Months unless specified otherwise                      |
| <b>Origin</b>            | China                                      |                      |   |


|                 |  |  |
|-----------------|--|--|
| <b>CONTENTS</b> | <ul style="list-style-type: none"> <li style="display: inline-block; width: 15px; height: 10px; background-color: #1a3d4d; margin-right: 5px;"></li> <li style="display: inline-block; width: 15px; height: 10px; background-color: #1a3d4d; margin-right: 5px;"></li> </ul> | <ul style="list-style-type: none"> <li style="display: inline-block; width: 15px; height: 10px; background-color: #1a3d4d; margin-right: 5px;"></li> </ul> |
|-----------------|--|--|

## HLD030 Series Hydraulic Jack


HLD Series Hydraulic Jack Interchangeable Hydraulic Tensioner

Strong versatility, suitable for stretching multiple specifications of bolts by replacing the stretching head.

Economically efficient, lightweight, and highly accurate. Can be equipped with manual pumps and pneumatic hydraulic pumps. Multiple stretchers can be used simultaneously. The standard working pressure is 150Mpa.



## Technical data:

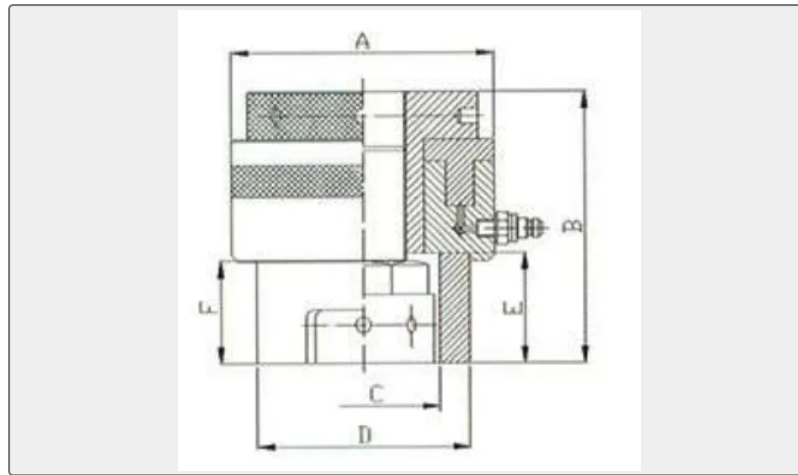

| Model  | Thread specification(mm) |       | Maximum tensile force (KN) | Dimension(mm) |     |     |     |    |     | Distance of run (mm) |
|--------|--------------------------|-------|----------------------------|---------------|-----|-----|-----|----|-----|----------------------|
|        | M                        | Inch  |                            | A             | B   | 0   | D   | E  | F   |                      |
| HLD024 | M24                      | 1     | 223                        | 86            | 110 | 46  | 69  | 29 | 24  | 10                   |
| HLD027 | M27                      | 1-1/8 | 223                        | 86            | 110 | 52  | 76  | 29 | 27  | 10                   |
| HLD030 | M30                      | 1-1/8 | 401                        | 110           | 130 | 57  | 80  | 37 | 30  | 10                   |
| HLD033 | M33                      | 1-1/4 | 401                        | 110           | 130 | 62  | 85  | 37 | 33  | 10                   |
| HLD036 | M36                      | 1-3/8 | 401                        | 110           | 130 | 68  | 91  | 38 | 36  | 10                   |
| HLD039 | M39                      | 1-1/2 | 401                        | 110           | 130 | 75  | 93  | 41 | 39  | 10                   |
| HLD042 | M42                      | 1-5/8 | 769                        | 130           | 150 | 80  | 100 | 49 | 42  | 10                   |
| HLD045 | M45                      | 1-3/4 | 769                        | 130           | 150 | 85  | 110 | 50 | 45  | 10                   |
| HLD048 | M48                      | 1-7/8 | 769                        | 130           | 150 | 92  | 110 | 51 | 48  | 10                   |
| HLD052 | M52                      | 2     | 769                        | 130           | 150 | 96  | 112 | 52 | 52  | 10                   |
| HLD056 | M56                      | 2-1/4 | 1467                       | 170           | 170 | 100 | 113 | 62 | 56  | 10                   |
| HLD060 | M60                      | 2-3/8 | 1467                       | 170           | 170 | 100 | 114 | 63 | 60  | 10                   |
| HLD064 | M64                      | 2-1/2 | 1467                       | 170           | 170 | 110 | 115 | 64 | 64  | 10                   |
| HLD068 | M68                      | 2-3/4 | 1467                       | 170           | 170 | 120 | 115 | 65 | 68  | 10                   |
| HLD072 | M72                      | 2-1/2 | 2262                       | 210           | 190 | 120 | 115 | 73 | 72  | 10                   |
| HLD076 | M76                      | 2-3/4 | 2262                       | 210           | 190 | 130 | 117 | 75 | 76  | 10                   |
| HLD080 | M80                      | 3-1/4 | 2262                       | 210           | 190 | 130 | 117 | 77 | 80  | 10                   |
| HLD085 | M85                      | 3-3/8 | 2486                       | 240           | 190 | 140 | 150 | 78 | 85  | 12                   |
| HLD090 | M90                      | 3-1/2 | 2486                       | 240           | 200 | 150 | 170 | 80 | 90  | 12                   |
| HLD095 | M95                      | 3-3/4 | 2486                       | 240           | 200 | 160 | 170 | 85 | 95  | 12                   |
| HLD100 | M1.00                    | 4     | 3958                       | 270           | 210 | 170 | 180 | 92 | 100 | 12                   |