FIRE DETECTION AND ALARM SYSTEM

HY-M500K Flush Type Manual Fire Alarm Button

ISO9001 Supplier

Class Certificate

Export Supply

Color: Red Shell Material: ABS Fire Retardant Cable Gland: 2-PG16 Voltage: DC15V-30V Current: <=5uA Alarm Current: <=30mA



jinbomarine.com

Key Highlights

Category	Fire Detection and Alarm System
Standard	EN
Material	Red Shell Material:
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

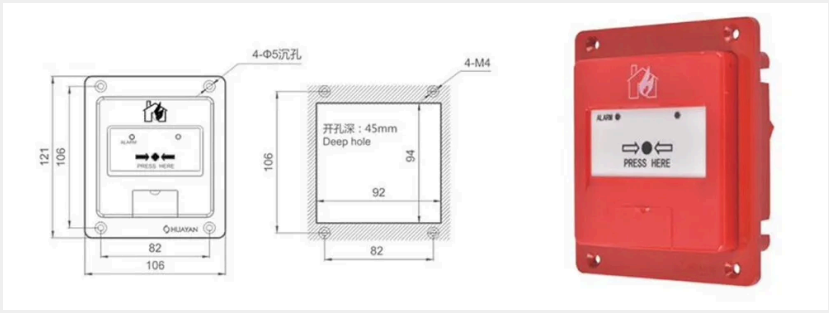
We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	Fire Detection and Alarm System	**Model / SKU**	HY-M500K-Flush-Type-Manual-Fire-Alarm-Button
Standard	EN	**Material**	Red Shell Material:
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	**Warranty**	12 Months unless specified otherwise
Origin	China		

China HY-M500K Flush Type Manual Fire Alarm Button:

Color: Red
Shell Material: ABS Fire Retardant
Cable Gland: 2-PG16
Voltage: DC15V-30V
Current: <=5uA
Alarm Current: <=30mA


4-Φ5沉孔
4-M4
121
106
82
106
开孔深：45mm
Deep hole
106
94
92
82
ALARM
PRESS HERE