




## China I Type Rubber Fender:

Energy absorption is higher than that of SA type.

Installation of small size, wide range of use.

Can be vertical, horizontal or mixed flexible arrangement is arranged on the front end of the front panel.

## Size:

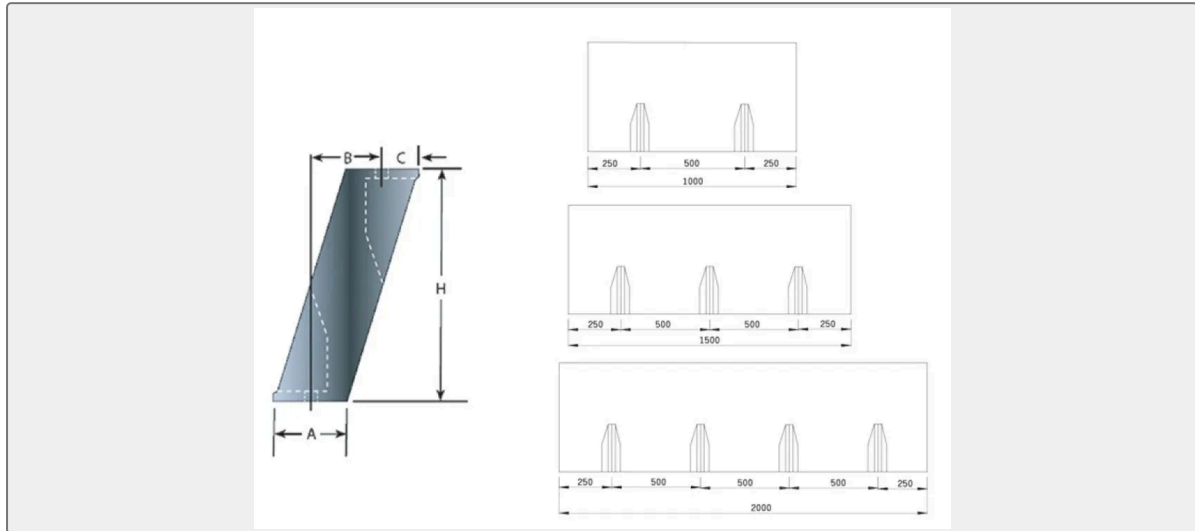

## Specification:

Specification	H	A	B	C	Weight
I300H	300	94	94	47	44
I400H	400	125	124	63	72
I500H	500	158	142	87	111
I550H	550	172	170	87	128
I600H	600	188	199	87	149
I750H	750	235	230	118	239
I800H	800	250	240	129	266
I1000H	1000	322	310	162	430
I1250H	1250	451	388	202	627
I1400H	1400	454	454	228	888
I1600H	1600	500	480	257	1018