

# Jinbo Marine

Marine &amp; Offshore Equipment Datasheet

PRODUCT DATASHEET

## CKY MARINE PUBLIC ADDRESS SYSTEM

# K14-Ex Explosion-Proof Speaker

K14-Ex Explosion-Proof Speaker Input: voltage constant 70V/100V/120V Resistance constant 8Q Power: 0.5W/1W/2W/3W/5W/10W/15W/25W Material: Aluminium alloy Color: Red ( ...

ISO9001 Supplier

Class Certificate

Export Supply



### Key Highlights

<b>Category</b>	CKY Marine Public Address System
<b>Standard</b>	GB
<b>Material</b>	K14-Ex Explosion-Proof Speaker Input: voltage constant 70V/100V/120V Res...
<b>Weight / Size</b>	Red ( RAL3020) IP class:IP66 Weight:3.8Kg Explosion-proof class:
<b>Certificate</b>	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

### Technical Specifications


<b>Category</b>	CKY Marine Public Address System	<b>Model / SKU</b>	K14-Ex-Explosion-Proof-Speaker
<b>Standard</b>	GB	<b>Material</b>	K14-Ex Explosion-Proof Speaker Input: voltage constant 70V/100V/120V Resistance constant 8Q Power: 0.5W/1W/2W/3W/5W/10W/15W/25W Material:
<b>Weight / Size</b>	Red ( RAL3020) IP class:IP66 Weight:3.8Kg Explosion-proof class:	<b>Certificate</b>	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
<b>Warranty</b>	12 Months unless specified otherwise	<b>Origin</b>	China



0.075950s

## China K14-Ex Explosion-Proof Speaker:

K14-Ex Explosion-Proof Speaker

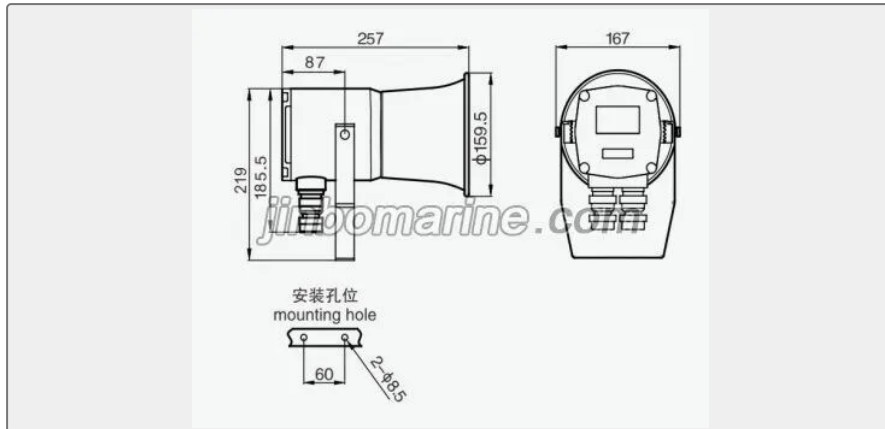

Input: voltage constant 70V/100V/120V

Resistance constant 8Q

Power: 0.5W/1W/2W/3W/5W/10W/15W/25W

Material: Aluminium alloy

Color: Red (RAL3020)

IP class: IP66

Weight: 3.8Kg

Explosion-proof class: Exd II B T5 Gb

Environment temperature:  $-25^{\circ}\text{C} \sim +55^{\circ}\text{C}$

Cable entrance hole size:  $2-\phi 14.5\text{mm}$

Remark: cable gland: M25