

## GENERAL EMERGENCY ALARM SYSTEM

# KG-1JK General Emergency Alarm Controller

ISO9001 Supplier

Class Certificate

Export Supply

KG-1JK General Emergency Alarm Controller Main power:AC220V±10% Emergency power: DC24V -25% +30% Alarm signal frequency: 1000±50Hz General emergency alarm time sequence: ...



KG-1JK

## Key Highlights

Category	General Emergency Alarm System
Standard	DIN
Weight / Size	KG-1JK General Emergency Alarm Controller Main power:AC220V±10% Emergenc...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


## Technical Specifications

Category	General Emergency Alarm System	Model / SKU	KG-1JK-General-Emergency-Alarm-Controller
Standard	DIN	Weight / Size	KG-1JK General Emergency Alarm Controller Main power:AC220V±10% Emergency power:
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

## China KG-1JK General Emergency Alarm Controller:

KG-1JK General Emergency Alarm Controller



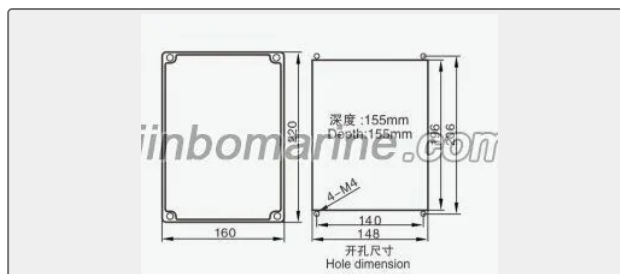

Main power: AC220V $\pm$ 10%

Emergency power: DC24V -25% +30%

Alarm signal frequency: 1000 $\pm$ 50Hz

General emergency alarm time sequence:

7 short pulses followed by a long pulse. Resend it every two seconds

Fire alarm time sequence: continuous modulated long tone

Manual alarm time sequence: Output according to the switch on or off

Interface signal level between general emergency alarm controller and public address: -7  $\pm$ 1dB

Interface resistance level between general emergency alarm controller and public address: 1k

Passive contact load(resistance): 8A/250VAC

KG-1JK Color: black (RAL9005)

IP class: IP20

Weight: 2.4kg

Power: 10W