

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

GENERAL EMERGENCY ALARM SYSTEM

KG-2JK General Emergency Alarm Controller

ISO9001 Supplier

Class Certificate

Export Supply

KG-2JK General Emergency Alarm Controller Main power:AC220V±10% Emergency power: DC24V -25% +30% Alarm signal frequency: 1000±50Hz General emergency alarm time se...



KG-2JK/KG-2JKB(配KG-4)
KG-2JK/KG-2JKB(Match KG-4)

Key Highlights

Category	General Emergency Alarm System
Standard	DIN
Weight / Size	KG-2JK General Emergency Alarm Controller Main power:AC220V±10% Emerge...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications



Category	General Emergency Alarm System	Model / SKU	KG-2JK-General-Emergency-Alarm-Controller
Standard	DIN	Weight / Size	KG-2JK General Emergency Alarm Controller Main power:AC220V±10% Emergency power:
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

China KG-2JK General Emergency Alarm Controller:

KG-2JK General Emergency Alarm Controller



0.092793s

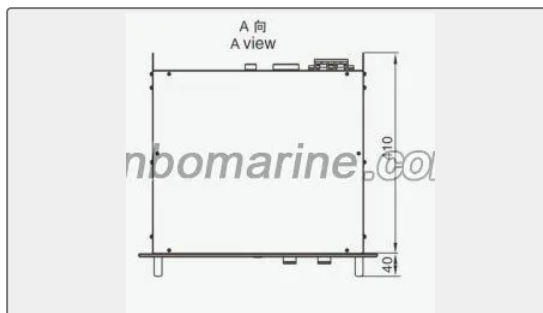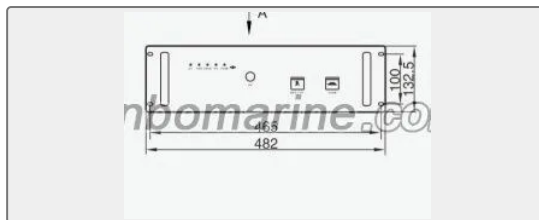

Main power: AC220V \pm 10%

Emergency power: DC24V -25% +30%

Alarm signal frequency: 1000 \pm 50Hz

General emergency alarm time sequence:

7 short pulses followed by a long pulse. Resend it every two seconds

Fire alarm time sequence: continuous modulated long tone

Manual alarm time sequence: Output according to the switch on or off

Interface signal level between general emergency alarm controller and public address: -7 \pm 1dB

Interface resistance level between general emergency alarm controller and public address: 1k

Passive contact load(resistance): 8A/250VAC

KG-2JK Color: Sea gray (B05)

IP class: IP20

Weight: 3.5Kg

Power: 10W