

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

MARINE BATTERYLESS TELEPHONE SYSTEM

KS/12KS/24KS-1F Batteryless Telephone

ISO9001 Supplier

Class Certificate

Export Supply

KS/12KS/24KS-1F Batteryless Telephone Ambient noise: ≤ 75 dB Ringing sound level: >85 dB(A) Power supply: DC24V -25% +30% Color: Sea gray (RAL7035) IP class:IP56 Weig...



Key Highlights

Category	Marine Batteryless Telephone System
Standard	EN
Weight / Size	Sea gray (RAL7035) IP class:IP56 Weight:2.0/6.9/2.4/8.9Kg Power:1W Stuffi...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS


We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


Technical Specifications

Category	Marine Batteryless Telephone System	Model / SKU	KS-12KS-24KS-1F-Batteryless-Telephone
Standard	EN	Weight / Size	Sea gray (RAL7035) IP class:IP56 Weight:2.0/6.9/2.4/8.9Kg Power:1W Stuffing box cable entrance hole size:
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

China KS/12KS/24KS-1F Batteryless Telephone:

KS/12KS/24KS-1F Batteryless Telephone



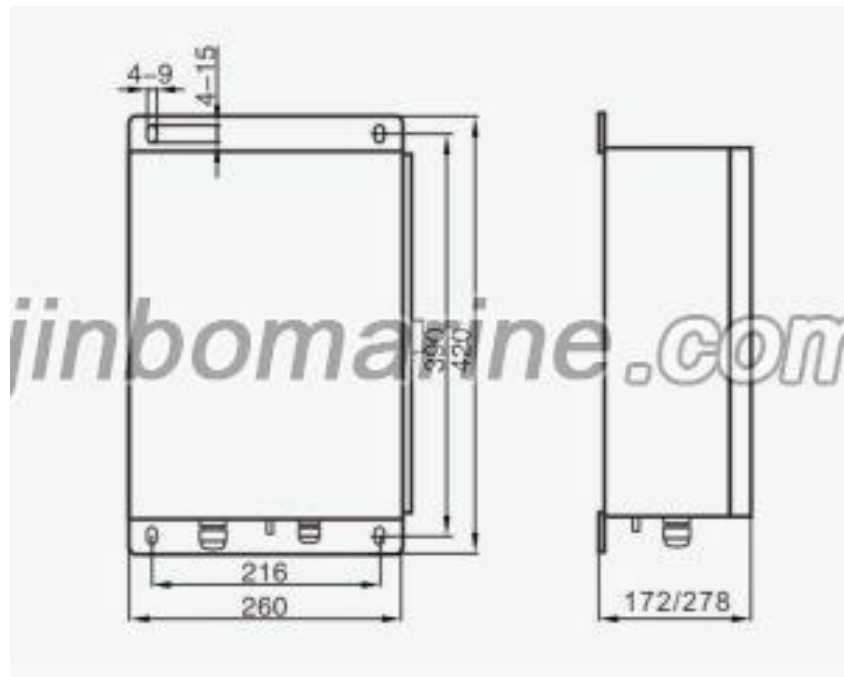

Ambient noise: ≤ 75 dB

Ringing sound level: > 85 dB(A)

Power supply: DC24V -25% +30%

Color: Sea gray (RAL7035)

IP class: IP56

Weight: 2.0/6.9/2.4/8.9Kg

Power: 1W

Stuffing box cable entrance hole size: KS/12KS-1F: 1- $\Phi 18$ mm;

24KS-1F: 1- $\Phi 18$ mm, 2- $\Phi 25$ mm