HFM FIRE DOOR CONTROL SYSTEM

KSM-2D Fire Door Relay Box

ISO9001 Supplier

Class Certificate

Export Supply

KSM-2D Fire Door Relay Box Input voltage: AC220V±10%   DC24V Output voltage: DC24V -25% +30% Output power:480W Color: Light gray （RAL7035） Tuffing ...



Key Highlights

Category	HFM Fire Door Control System
Standard	EN
Weight / Size	Light gray（RAL7035） Tuffing box cable entrance hole size:18-Φ18mm IP cla...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS


We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	HFM Fire Door Control System	**Model / SKU**	KSM-2D-Fire-Door-Relay-Box
Standard	EN	**Weight / Size**	Light gray（RAL7035） Tuffing box cable entrance hole size:18-Φ18mm IP class:IP44 Weight:17Kg Power:≤580W
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	**Warranty**	12 Months unless specified otherwise
Origin	China		

China KSM-2D Fire Door Relay Box:

KSM-2D Fire Door Relay Box

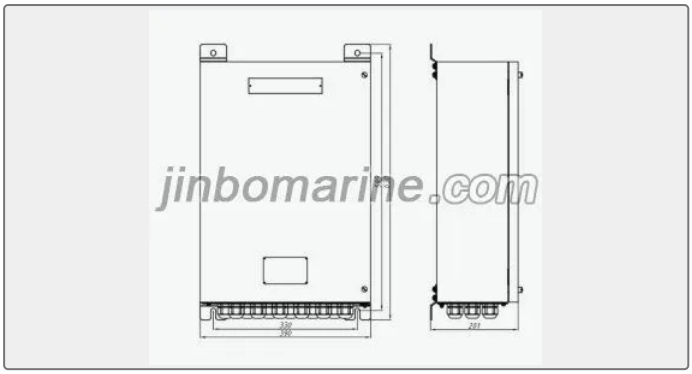

Input voltage: AC220V±10% DC24V

Output voltage: DC24V -25% +30%

Output power:480W

Color: Light gray (RAL7035)

Tuffing box cable entrance hole size:18-Φ18mm

IP class:IP44

Weight:17Kg

Power:≤580W