ANCHOR CHAIN


Kenter Shackle

Kenter Shackle is used for joining the anchor chain to meet the mooring requirement.

ISO9001 Supplier

Class Certificate

Export Supply

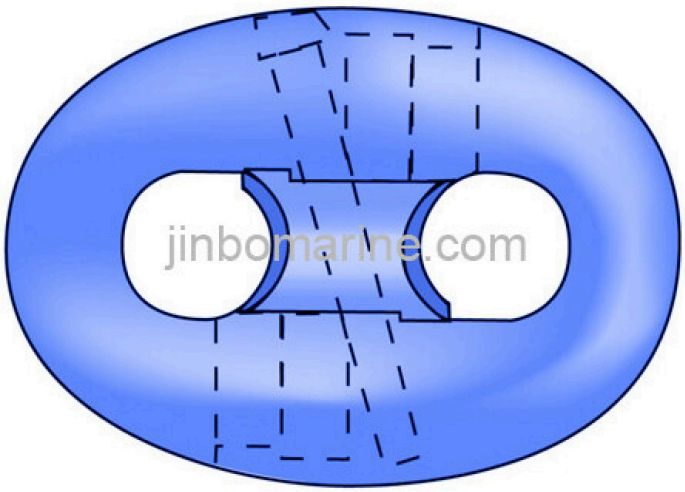

Key Highlights

Category	Anchor Chain
Standard	EN
Material	CM490/CM690
Weight / Size	U2 or U3 Size:
Certificate	ABS,LR, BV, GL,DNV,RINA, NK, KR, RS, IRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	Anchor Chain	Model / SKU	Kenter-Shackle
Standard	EN	Material	CM490/CM690
Weight / Size	U2 or U3 Size:	Certificate	ABS,LR, BV, GL,DNV,RINA, NK, KR, RS, IRS, CCS
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS

- China Kenter Shackle:
- Shackle Weight:
- Technical specification:

China Kenter Shackle:


Kenter Shackle is to joining the anchor chains, detachable shackle.

Technical specification:

Grade: U2 or U3

Size: 12.5mm to 162mm

Class Certificate: ABS, LR, BV, DNV, GL, RINA, KR, NK,RS and CCS.

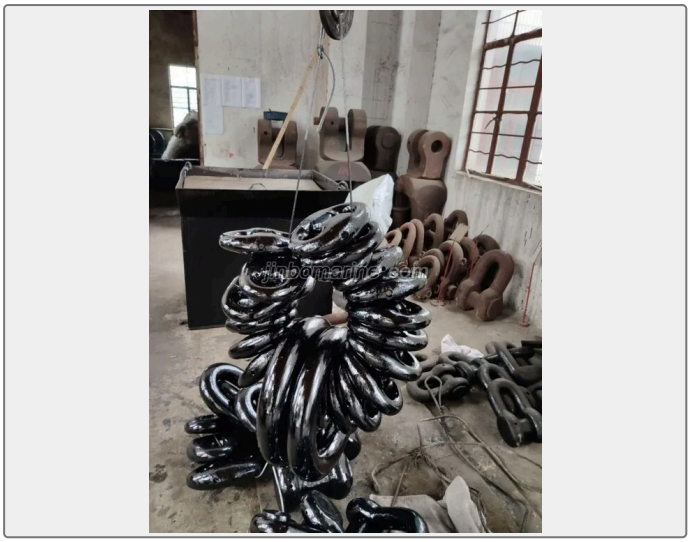

Shackle Weight:

Chain diameter		Kenter shackle	Joining shackle	Anchor shackle	Swivel	swivel Forerunner	Swivel shackle Type A	Swivel shackle Type B
Inches	mm	kg	kg	kg	kg	kg	kg	kg
43/78	14	0.6	0.6	1.5	1.1	2.4	-	-
17/27	16	0.6	0.9	1.5	1.3	3.2	-	-
31/45	17.5	0.8	1.3	2.1	1.7	4.2	-	-
3/4	19	1.1	1.8	2.4	2.1	5.5	-	-
13/16	20.5	1.3	2.2	3.2	2.2	6.1	-	-

7/8	22	1.6	2.6	3.9	3.5	8.7	17.5	7.6
15/16	24	2.1	3.4	5.1	4.5	10.9	17.5	9.9
1	25.5	2.5	4.5	6.7	5.7	14.2	37.6	12.5
11/16	27	3.3	5.1	8.1	7.2	17.4	37.6	15.7
13/16	30	4.1	6.3	10	9	22.3	91	19.4
11/4	31.5	5	8.2	11.7	10.1	26.6	91	23.4
15/16	33.5	6	9.5	14.2	12.7	32.2	107	28
13/8	35	6.8	11.3	16.5	14.9	38.3	107	33.4
11/2	38	8.4	13.4	19.5	17.4	42.6	107	39.4
19/16	39.5	9.6	15.5	22.8	20.2	50.4	115	46
15/8	41.5	11	18.1	26	25.4	59.5	115	53
13/4	44.5	12.4	20.2	29.7	26.6	66.5	139	61

1 1 3 / 1 6	4 6	14.1	23.3	34.3	30.6	76.7	139	70
1 7 / 8	4 7. 5	16.7	27.5	38	35	89.8	139	79
1 1 5 / 1 6	4 9	19	31.6	45.2	40.5	101.8	264	89
2	5 1	20.3	34	50.9	49.5	117.2	264	101
2 1 / 8	5 4	23.7	38.5	53.8	50.5	124.9	270	113
2 3 / 1 6	5 5. 5	26.7	46	63	55	137.9	270	126
2 5 / 1 6	5 8. 5	27.2	46.8	70	64.6	156.4	294	140
2 3 / 8	6 0. 5	27.7	51	77.5	71.3	171.3	294	155
2 7 / 1 6	6 2	35	59.2	86.3	77.7	187.4	294	171
2 1 / 2	6 3. 5	38.4	62.7	96.3	83.3	202.2	403	188
2 5 / 8	6 6. 5	42.3	75	99.6	88.7	223.1	403	206

2 1 1 / 1 6	6 8	46	76.7	102.6	100	247.5	403	225
2 3 / 4	6 9. 5	48.7	90	126.2	107.8	269.3	464	246
2 7 / 8	7 3	53	95	138.2	125.6	306.2	464	278
3	7 6	60.7	107	146	143.8	347.8	464	314
3 1 / 1 6	7 7. 5	65.5	116	164	154	379.4	749	340
3 3 / 1 6	8 1	75	130	190	188	435.7	749	380
3 5 / 1 6	8 4	90	136	212	198	464	931	424
3 7 / 1 6	8 7. 5	96	160	237	215	521.7	931	472
3 9 / 1 6	9 0. 5	108	176	245	238	571	1191	522
3 5 / 8	9 2	114	196	257	252	616	1191	558
3 3 / 4	9 5	128	215	300	269	656	1191	614

3 1 3 / 1 6	9 7	133	222	335	301	713.1	-	654
3 1 5 / 1 6	1 0 0	146	252	353	330	785	1464	717
4	1 0 1. 5	158	267	378	344	835.5	1464	761
4 1 / 8	1 0 5	160	294	385	387	916	1466	830
4 1 / 4	1 0 8	180	305	420	428	991	1466	879
4 3 / 8	1 1 1	198	325	463	448	1061	1830	980
4 1 / 2	1 1 4. 5	204	345	485	460	1116	1830	1062
4 5 / 8	1 1 7. 5	225	365	528	475	1177	1830	1147
4 3 / 4	1 2 0. 5	250	400	570	547	1332	-	-
4 9 / 1 6	1 2 2	263	425	602	649	1480	-	-
4 7 / 8	1 2 4	290	465	632	680	1550	-	-

5	127	312	499	679	729	1663	-	-
5 1/8	130	333	536	729	784	1797	-	-
5 1/4	133.5	350	561	762	820	1862	-	-
5 3/8	136.5	392	627	852	912	2065	-	-
5 5/8	143	436	698	949	1012	2315	-	-
5 3/4	146	485	774	1053	1124	2578	-	-
6	152.5	537	856	1164	1238	2839	-	-
6 2/11	157	591	943	1283	1360	3102	-	-
6 3/8	162	651	1036	1410	1490	3401	-	-