


HEAT EXCHANGER

LC Type Hydraulic Oil Cooler

LC type cooler used in metallurgy, mining, cement, power, light industry, food, chemical industry, papermaking industry of thin oil lubrication system and hydraulic system of lubricating oil, hydraulic oil. ...

- ISO9001 Supplier
- Class Certificate
- Export Supply



Key Highlights


Category	Heat Exchanger
Standard	EN
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications			
Category	Heat Exchanger	Model / SKU	LC-Type-Hydraulic-Oil-Cooler
Standard	EN	Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
Warranty	12 Months unless specified otherwise	Origin	China

China LC Type Hydraulic Oil Cooler:

LC type cooler used in metallurgy, mining, cement, power, light industry, food, chemical industry, papermaking industry of thin oil lubrication system and hydraulic system of lubricating oil, hydraulic oil.

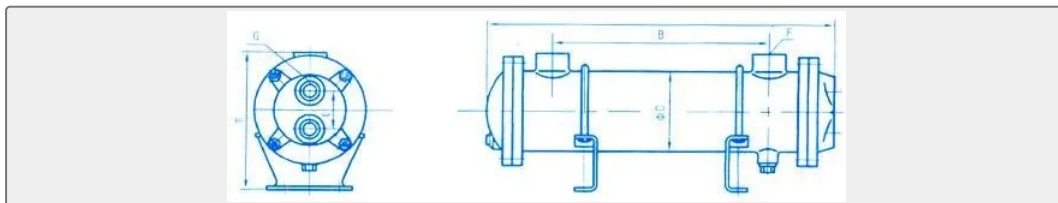

Model	A	B	C	D	M	F	G
-------	---	---	---	---	---	---	---

LC1-0.4L/L	396	240	40	88.5	152	G1"	G0.75"
LC1-0.6L/L	561	405	40	88.5	152	G1"	G0.75"
LC1-0.8L/L	688	532	40	88.5	152	G1"	G0.75"
LC1-1.0L/L	821	665	40	88.5	152	G1"	G0.75"
LC1-1.2L/L	961	805	40	88.5	152	G1"	G0.75"
LC1-1.3L/L	561	374	80	133	218	G1"	G1"
LC1-1.7L/L	687	500	80	133	218	G1"	G1"
LC1-2.1L/L	821	634	80	133	218	G1"	G1"
LC1-2.6L/L	963	776	80	133	218	G1"	G1"
LC1-3.0L/L	1113	926	80	133	218	G1"	G1"
LC1-3.5L/L	1271	1084	80	133	218	G1"	G1"
LC-1.0L/L	367	160	80	133	218	G1"	G1"
LC-1.6L/L	547	340	80	133	218	G1"	G1"
LC-2.5L/L	747	540	80	133	218	G1"	G1"
LC-3.2L/L	917	710	80	133	218	G1"	G1"
LC-4.0L/L	1117	910	80	133	218	G1"	G1"
LC-5.0L/L	1271	1064	80	133	218	G1"	G1"
LC-6.0L/L	1090	870	128	219	309	G2"	G1.5"
LC-7.2L/L	1260	1040	128	219	309	G2"	G1.5"
LC-8.5L/L	1302	1280	128	219	309	G2"	G1.5"
LC-10L/L	1750	1530	128	219	309	G2"	G1.5"

