

SENSOR

MDS120A/MDS150A/MDS200A
Three-Phase Bridge Rectifier Module

MDS120A/MDS150A/MDS200A Three-Phase Bridge Rectifier Module Size : Principle : Type Parameter IO IFSM I2t VRRM IRRM VFM Tj Rjc VISO F-L A ...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Sensor
Standard	ISO
Weight / Size	MDS120A/MDS150A/MDS200A Three-Phase Bridge Rectifier Module Size :
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


Technical Specifications

Category	Sensor	Model / SKU	MDS120A-MDS150A-MDS200A-Three-Phase-Bridge-Rectifier-Module
Standard	ISO	Weight / Size	MDS120A/MDS150A/MDS200A Three-Phase Bridge Rectifier Module Size :
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		


China MDS120A/MDS150A/MDS200A Three-Phase Bridge Rectifier Module:

MDS120A/MDS150A/MDS200A Three-Phase Bridge Rectifier Module

Size :

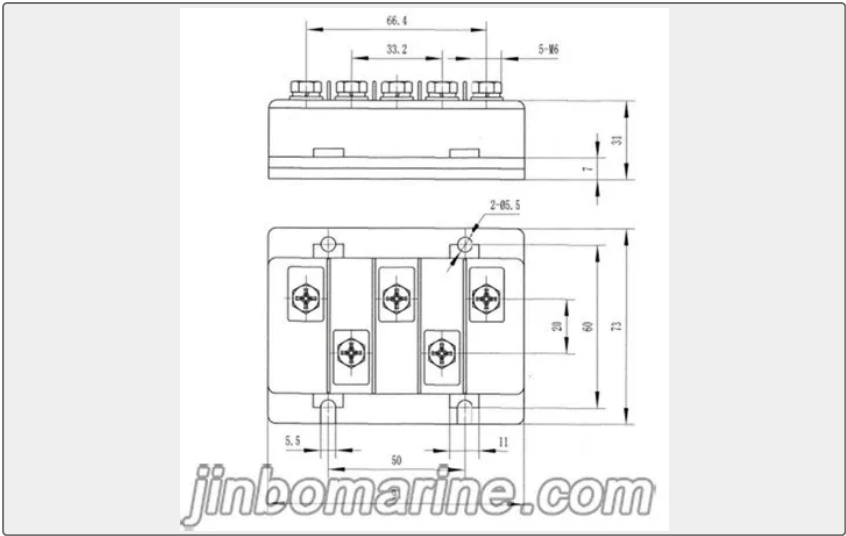

Principle :

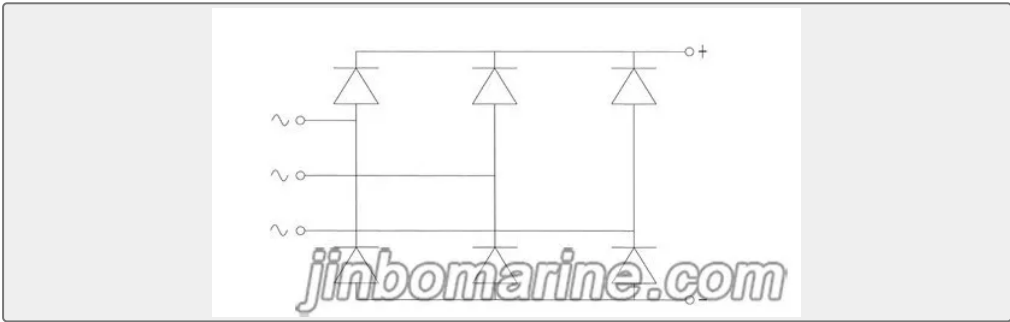

Type	Parameter										
	IO	IFSM	I2t	VRRM	IRRM	VFM	Tj	Rjc	VISO	F-L	
	A	A	A2S	V	mA	V	°C	°C/W	V	Fitting Module N.m	Electrode Connection N.m
MDS	30	270	0.8x1 03	800~18 00	≤3	≤1.30	-40~1 50	1.2	≥2500	3.5	
	60	360	1.2x1 03		≤3	≤1.30		0.8		3.5	2.3
	75	450	1.8x1 03		≤5	≤1.30		0.6		4.5	3.5
	100	630	3.2x1 03		≤5	≤1.30		0.4		4.5	3.5
	150	900	8.6x1 03		≤9	≤1.30		0.3		4.5	4.5
	200	1200	14.7x 103		≤9	≤1.30		0.25		4.5	4.5
SQL	50	320	1.0x1 03		≤4	≤1.30		1.5		4.5	