

DRAG ANCHOR

MK5 Anchor

MK5 anchor is a deep penetrating anchor with a plough shaped shank, with higher holding capacity and easier handing.

- ISO9001 Supplier
- Class Certificate
- Export Supply



Key Highlights

Category	Drag Anchor
Standard	DIN
Material	High Grade Steel Plate, DH36, Q345B, Q345C
Weight / Size	1500kgs-65000kgs
Certificate	LR, ABS,BV, GL, RINA, DNV, NK, KR, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	Drag Anchor	Model / SKU	MK5-Anchor
Standard	DIN	Material	High Grade Steel Plate, DH36, Q345B, Q345C
Weight / Size	1500kgs-65000kgs	Certificate	LR, ABS,BV, GL, RINA, DNV, NK, KR, CCS
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS	<ul style="list-style-type: none"> ■ China MK5 Anchor: ■ Main Specification: ■ Transportation Size ■ MK5 Anchor Installation 	<ul style="list-style-type: none"> ■ Advantages of WS MK5 Anchor ■ Size Table ■ MK5 Anchor Easy Handling ■ How to connect MK5 Anchor and Chain
-----------------	--	--

China MK5 Anchor:

MK5 anchor is a deep penetrating anchor with a plough shaped shank, with higher holding capacity and easier handing.



This anchor has a good performance in sand and hard clay, medium clay and very soft clay.

Advantages of WS MK5 Anchor

- Easy handing
- Easy Install
- Easy Retrieve
- Uplift Capacity
- This anchor is used for semi-submersible rigs or permanent installation

Main Specification:

Weight: 1500kgs-65000kgs

Certificate: LR, ABS,BV, GL, RINA, DNV, NK, KR, CCS


High Holding Capacity

Size Table

Weight	A	B	C	E	F	H	T	S
1500	2954	3184	1812	1505	271	1230	493	80
3000	3721	401	2283	1896	342	1550	622	90
5000	4412	4756	2707	2248	406	1837	738	110
8000	5161	5563	3166	2629	474	2149	862	130
10000	5559	5992	3410	2832	511	2315	929	140
12000	5908	636	3624	3010	543	2460	988	150
15000	6364	6860	3904	3242	585	2650	1064	170
18000	6763	7290	4149	3446	622	2816	1131	180
20000	7004	7550	4297	3569	644	2917	1171	190
22000	7230	7794	4436	3684	665	3011	1209	200
25000	7545	8133	4629	3844	694	3142	1262	200
30000	8018	8643	4919	4085	737	3339	1341	220
65000	10375	11184	6365	5286	954	4321	1736	300


Transporation Size

Anchor	Fluke	Shank	B	C	D	H	T	U	V	W
1500	600	900	3184	1812	2367	1232	494	3294	1221	984
3000	1300	1700	3999	2283	2969	1538	623	4141	1526	1240
5000	2100	2900	4750	2707	3529	1831	739	4913	1817	1470
8000	3400	4600	5550	3166	4122	2140	864	5747	2199	1719




10000	4300	5700	5980	3411	4442	2301	930	6190	2285	1852
12000	5200	6800	6348	3625	4714	2443	989	6578	2522	1968
15000	6400	8600	6848	3904	5087	2808	1132	7533	2783	2253
18000	7700	10300	7278	4149	5407	2808	1132	7533	2783	2253
20000	8600	11400	7547	4297	5609	2920	1172	7806	2891	2334
22000	9400	12600	7799	4436	5799	3016	1210	8060	2994	2409
25000	10700	14300	8123	4629	6035	3135	1263	8406	3108	2514
30000	12900	7100	8650	4919	6431	3345	1342	8936	3321	2671
65000	27900	37100	11193	6365	8322	4328	1737	11563	47297	3456

MK5 Anchor Easy Handling

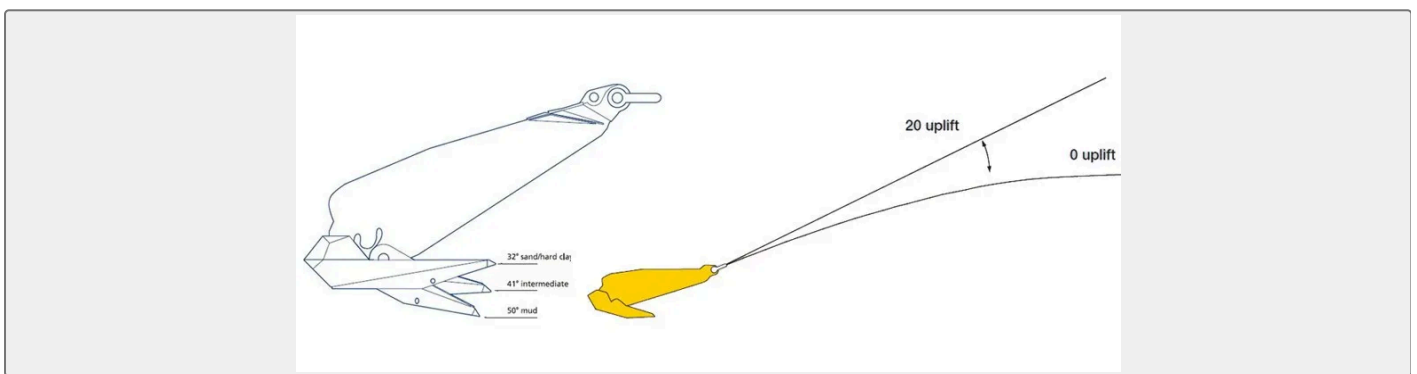

MK5 Anchor Installation

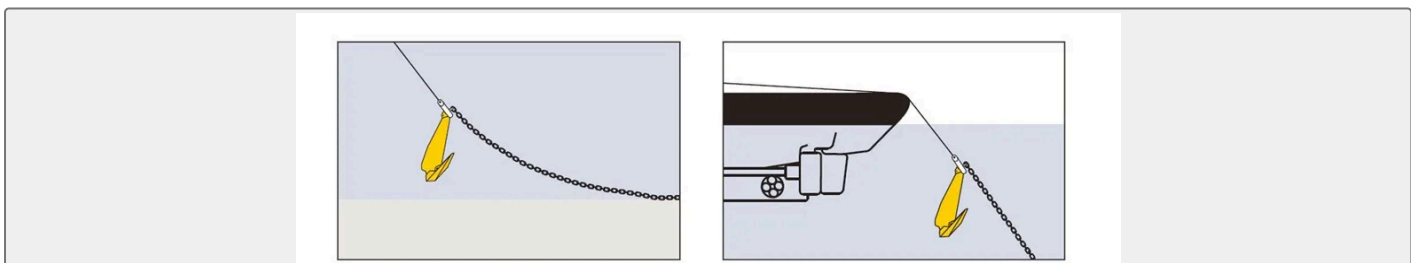

How to connect MK5 Anchor and Chain

