

SENSOR

MXG/Y (1) 40A Three-Phase Full-Bridge Rotating Rectifier Module

MXG/Y (1) 40A Three-Phase Full-Bridge Rotating Rectifier Module Size :
Principle : Type Parameter IF(AV) IFSM I2t VRRM IRRM VFM
Tj Rjc VISO F-L ...

ISO9001 Supplier

Class Certificate

Export Supply



jinbomarine.com

Key Highlights

Category	Sensor
Standard	ISO
Weight / Size	MXG/Y (1) 40A Three-Phase Full-Bridge Rotating Rectifier Module Size :
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


Technical Specifications

Category	Sensor	Model / SKU	MXG-Y-1-40A-Three-Phase-Full-Bridge-Rotating-Rectifier-Module
Standard	ISO	Weight / Size	MXG/Y (1) 40A Three-Phase Full-Bridge Rotating Rectifier Module Size :
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		


China MXG/Y (1) 40A Three-Phase Full-Bridge Rotating Rectifier Module:

MXG/Y (1) 40A Three-Phase Full-Bridge Rotating Rectifier Module

Size :

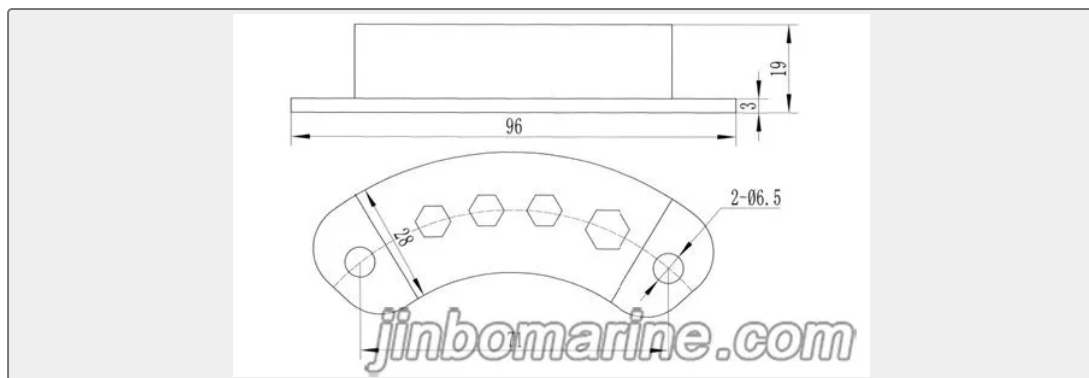

Principle :

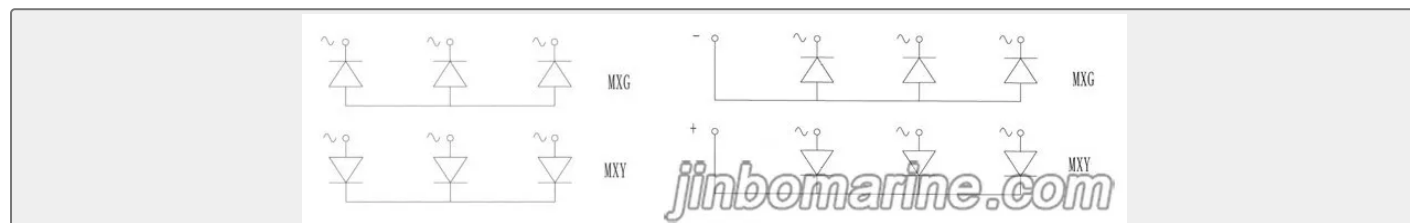

Type	Parameter										
	IF(AV)	IFSM	I2t	VRRM	IRRM	VFM	Tj	Rjc	VISO	F-L	
	A	A	A2S	V	mA	V	°C	°C/W	V	Fitting Module N.m	Electrode Connection N.m
MX G/Y	25	570	1.6x1 03	800~1 800	≤2	≤1.20	-40~15 0	0.45	4.5	2.3	
	40	750	2.8x1 03		≤4	≤1.30		0.35	4.5	2.3	
	40 press-pack	900	4.0x1 03		≤4	≤1.30		0.45	4.5	3.5	
	50	940	5.0x1 03		≤4	≤1.30		0.3	4.5	3.5	
	50 press-pack	1200	7.2x1 03		≤4	≤1.30		0.4	4.5	3.5	
	70 press-pack	1540	11.8x1 03		≤4	≤1.30		0.35	4.5	3.5	
	40(1)	750	2.8x1 03		≤4	≤1.30		0.35	≥2500	4.5	3.5
	50(2)	940	5.0x1 03		≤4	≤1.30		0.3		4.5	3.5
	100 press-pack	2200	24.0x 103		≤5	≤1.65		0.4		4.5	3.5
	150 press-pack	3400	56.0x 103		≤8	≤1.80		0.5		4.5	3.5