

MXG/Y25A / MXG/Y40A Three-Phase Full-Bridge Rotating Rectifier Module



Two black curved battery terminal connectors, each featuring three metal screws and a metal tab with a hole. The connectors are shown against a white background.

jinbomarine.com


Category	Sensor
Standard	ISO
Weight / Size	MXG/Y25A/MXG/Y40A Three-Phase Full-Bridge Rotating Rectifier Module ...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


Category	Sensor	Model / SKU	MXG-Y25A-MXG-Y40A-Three-Phase-Full-Bridge-Rotating-Rectifier-Module
Standard	ISO	Weight / Size	MXG/Y25A/MXG/Y40A Three-Phase Full-Bridge Rotating Rectifier Module Size :
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

MXG/Y25A/MXG/Y40A Three-Phase Full-Bridge Rotating Rectifier Module

Size :

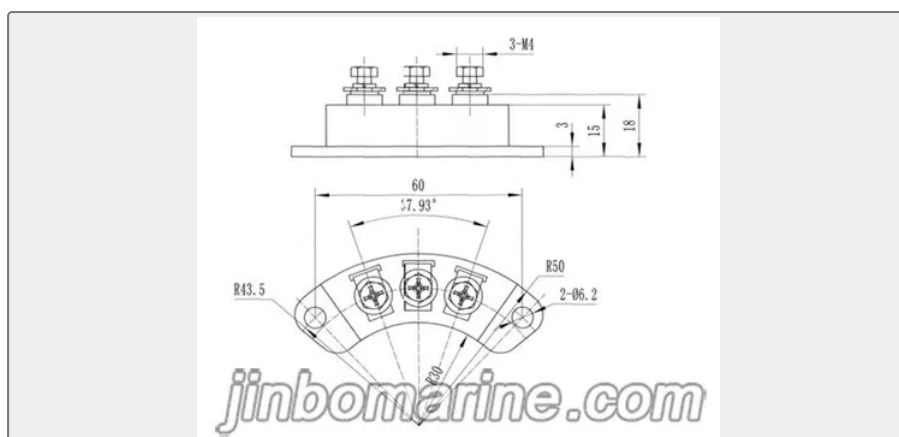

Principle :

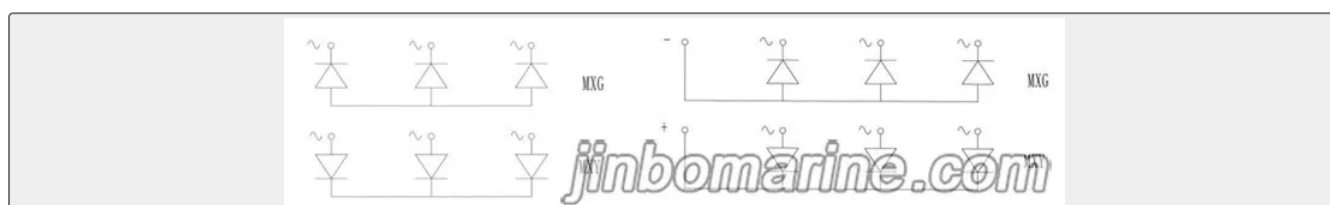

Type	Parameter										
	IF(AV)	IFSM	I2t	VRRM	IRRM	VFM	Tj	Rjc	VISO	F-L	
	A	A	A2S	V	mA	V	°C	°C/W	V	Fitting Module N.m	Electrode Connection N.m
MX G/Y	25	570	1.6x1 03	800~1 800	≤2	≤1.20	-40~15 0	0.45	4.5	2.3	
	40	750	2.8x1 03		≤4	≤1.30		0.35	4.5	2.3	
	40 press-pack	900	4.0x1 03		≤4	≤1.30		0.45	4.5	3.5	
	50	940	5.0x1 03		≤4	≤1.30		0.3	4.5	3.5	
	50 press-pack	1200	7.2x1 03		≤4	≤1.30		0.4	4.5	3.5	
	70 press-pack	1540	11.8x1 03		≤4	≤1.30		0.35	4.5	3.5	
	40(1)	750	2.8x1 03		≤4	≤1.30		0.35	≥2500	4.5	3.5
	50(2)	940	5.0x1 03		≤4	≤1.30		0.3		4.5	3.5
	100 press-pack	2200	24.0x 103		≤5	≤1.65		0.4		4.5	3.5
	150 press-pack	3400	56.0x 103		≤8	≤1.80		0.5		4.5	3.5