

SENSOR

MXG/Y40A/ MXG/Y50A/ MXG/Y70A
Three-Phase Full-Bridge Rotating
Rectifier Module

ISO9001 Supplier

Class Certificate

Export Supply

MXG/Y40A/ MXG/Y50A/ MXG/Y70A Three-Phase Full-Bridge Rotating Rectifier Module
 Size : Principle : Type Parameter IF(AV)
IFSM I2t VRRM IRRM V...



Key Highlights

Category	Sensor
Standard	ISO
Weight / Size	MXG/Y40A/ MXG/Y50A/ MXG/Y70A Three-Phase Full-Bridge Rotating Rectifier ...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement,
drawings, class certificate needs, and delivery
schedule.


Technical Specifications

Category	Sensor	Model / SKU	MXG-Y40A-MXG-Y50A-MXG-Y70A-Three-Phase-Full-Bridge-Rotating-Rectifier-Module
Standard	ISO	Weight / Size	MXG/Y40A/ MXG/Y50A/ MXG/Y70A Three-Phase Full-Bridge Rotating Rectifier Module Size :
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		


China MXG/Y40A/ MXG/Y50A/ MXG/Y70A Three-Phase Full-Bridge Rotating
Rectifier Module:

MXG/Y40A/ MXG/Y50A/ MXG/Y70A Three-Phase Full-Bridge Rotating Rectifier Module

Size :

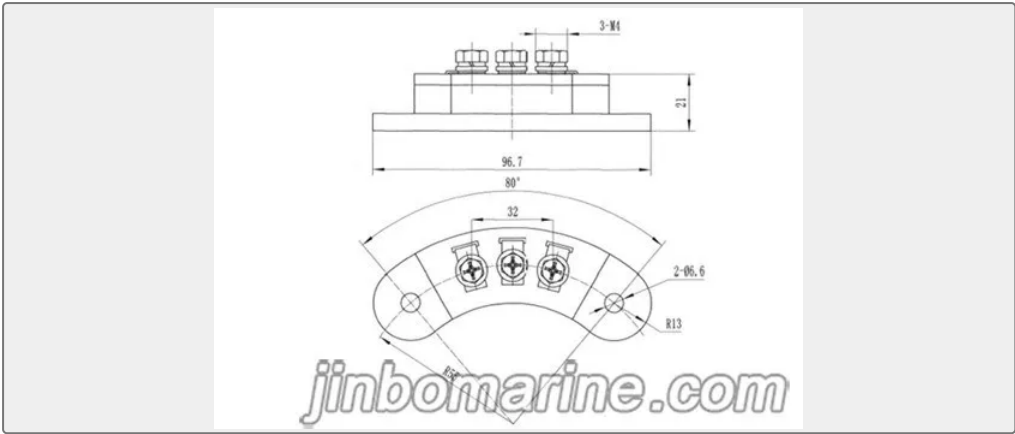

Principle :

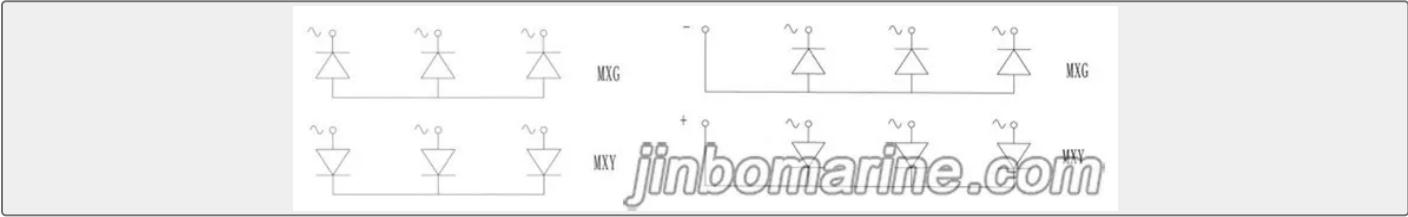

Type	Parameter										
	IF(AV)	IFSM	I2t	VRRM	IRRM	VFM	Tj	Rjc	VISO	F-L	
	A	A	A2S	V	mA	V	°C	°C/W	V	Fitting Module N.m	Electrode Connection N.m

MX G/Y	25	570	1.6x1 03	800~1 800	≤2	≤1.20	-40~15 0	0.45	4.5	2.3	
	40	750	2.8x1 03		≤4	≤1.30		0.35	4.5	2.3	
	40 press-pack	900	4.0x1 03		≤4	≤1.30		0.45	4.5	3.5	
	50	940	5.0x1 03		≤4	≤1.30		0.3	4.5	3.5	
	50 press-pack	1200	7.2x1 03		≤4	≤1.30		0.4	4.5	3.5	
	70 press-pack	1540	11.8x1 03		≤4	≤1.30		0.35	4.5	3.5	
	40(1)	750	2.8x1 03		≤4	≤1.30		0.35	≥2500	4.5	3.5
	50(2)	940	5.0x1 03		≤4	≤1.30		0.3		4.5	3.5
	100 press-pack	2200	24.0x 103		≤5	≤1.65		0.4		4.5	3.5
	150 press-pack	3400	56.0x 103		≤8	≤1.80		0.5		4.5	3.5