

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

MARINE DOOR

Marine Aluminum Quick Acting Weathertight Door with Single Lever

 Standard: GB/T3477-96 & CB/T454-97 for reference. The Aluminum weathertight door must pass the hose test with nozzle diameter 12.5mm and the water pressure 0.25Mpa. ...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Marine Door
Standard	GB
Material	Aluminum
Weight / Size	Door Leaf-Aluminum Door Frame-Aluminum(Bolted installment) or Steel (Wel...
Certificate	CCS, BV, ABS, GL, LR, DNV, NK,RINA, KR,IRS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	Marine Door	Model / SKU	Marine-Aluminum-Quick-Acting-Weathertight-Door-with-Single-Lever
Standard	GB	Material	Aluminum
Weight / Size	Door Leaf-Aluminum Door Frame-Aluminum(Bolted installment) or Steel (Welded installment) Lever-Carbon Steel or Stainless Steel Main Size List(mm):	Certificate	CCS, BV, ABS, GL, LR, DNV, NK,RINA, KR,IRS
Warranty	12 Months unless specified otherwise	Origin	China


CONTENTS

- China Marine Aluminum Quick Acting Weathertight Door with Single Lever:
- Main Material:
- Type:
- Main Size List(mm):



0.047470s

China Marine Aluminum Quick Acting Weathertight Door with Single Lever:

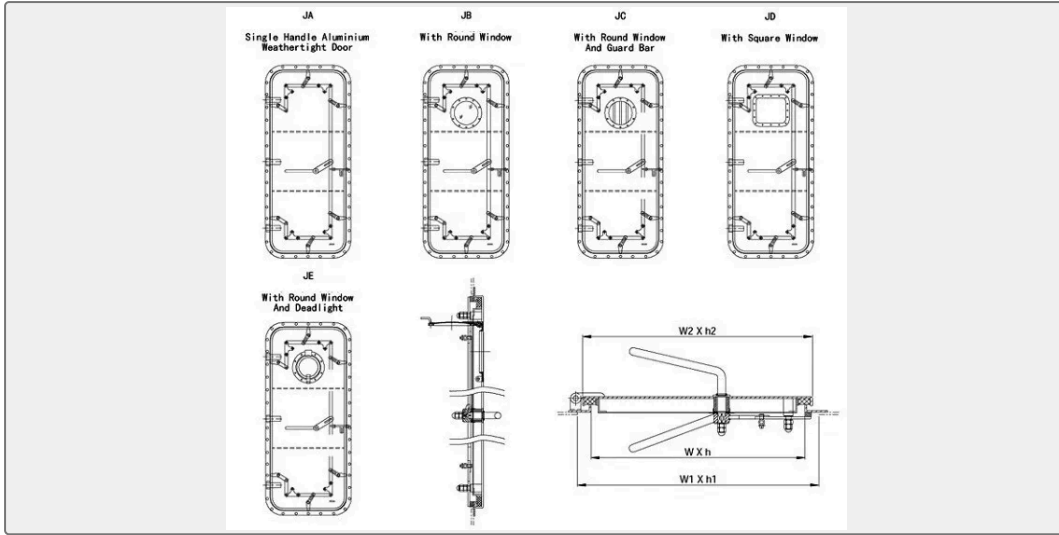

Standard: GB/T3477-96 &CB/T454-97 for reference.

The Aluminum weathertight door must pass the hose test with nozzle diameter 12.5mm and the water pressure 0.25Mpa.

Type:

- JA-Aluminum weathertight door
- JB-Aluminum weathertight door with round window
- JC-Aluminum weathertight door with round window & guard bar
- JD-Aluminum weathertight door with square window
- JE-Aluminum weathertight door with round window & deadlight

Main Material:

- Door Leaf-Aluminum
- Door Frame-Aluminum(Bolted installment) or Steel (Welded installment)
- Lever-Carbon Steel or Stainless Steel

Main Size List(mm):

Clear Size	Cut Out Size		Door leaf Size		Door Frame	
WXh	W1Xh1	R	W2Xh2	t	Spec	Thickness



500x1000	560x1060	130	555x1055	4,6	75x50	6,8
600x1200	660x1260		655x1255			
600x1400	660x1460		655x1455			
750x1400	810x1460		805x1455			
900x1400	960x1460		955x1455			
600x1600	660x1660		655x1655			
750x1600	810x1660		805x1655			
900x1600	960x1660		955x1655			