

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

JIS MARINE CHECK VALVE

Marine Bronze 5K Screw-down Check Globe Valve (Union Bonnet Type) JIS F7411

ISO9001 Supplier

Class Certificate

Export Supply

Marine Bronze 5K Screw-down Check Globe Valve (Union Bonnet Type) JIS F7411 is used on the ship pipe line of steam, fresh water, sea water, fuel oil & lubrication oil. Function: Open/Close the pipe system ...



Key Highlights

Category	JIS Marine Check Valve
Standard	JIS
Material	Bronze/Brass
Weight / Size	Body-1.05Mpa, Seat-0.77Mpa Flange Size as per JIS B2220-5K Main Material...
Certificate	CCS, BV, ABS, NK, DNV/GL, LR

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications


Category	JIS Marine Check Valve	Model / SKU	Marine-Bronze-5K-Screw-down-Check-Globe-Valve-Union-Bonnet-Type-JIS-F7411
Standard	JIS	Material	Bronze/Brass
Weight / Size	Body-1.05Mpa, Seat-0.77Mpa Flange Size as per JIS B2220-5K Main Material:	Certificate	CCS, BV, ABS, NK, DNV/GL, LR
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS

- China Marine Bronze 5K Screw-down Check Globe Valve (Union Bonnet Type) JIS F7411:
- Main Material:
- Main Size List(mm):

 0.072332s

China Marine Bronze 5K Screw-down Check Globe Valve (Union Bonnet Type) JIS F7411:

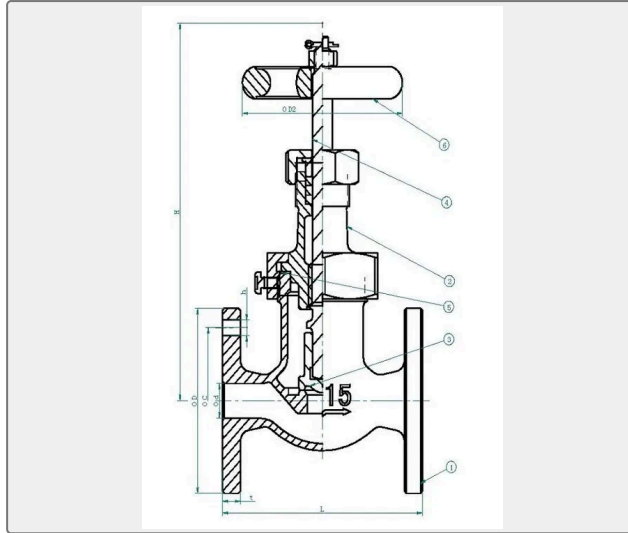

Marine Bronze 5K Screw-down Check Globe Valve (Union Bonnet Type) JIS F7411 is used on the ship pipe line of steam, fresh water, sea water, fuel oil & lubrication oil.

Function: Open/Close the pipe system

Design Standard: JIS F7411-1996

Test Standard: JIS F7400-1996

Test Pressure: Body-1.05Mpa, Seat-0.77Mpa

Flange Size as per JIS B2220-5K

Main Material:

1-Body: Bronze (BC6)/ Brass

2-Disc: Bronze (BC6) / Brass

3-Stem: Brass (C3771BD)

4-Bonnet: Bronze (BC6) / Brass

5-Handwheel: Cast Iron (FC200)

Main Size List(mm):

Size	Face to Face (L)	Flange diam. (D)	Pitch (C)	No of Bolt Hole	h	t	H	D2
15	100	80	60	4	12	9	130	80
20	110	85	65	4	12	10	140	100
25	120	95	75	4	12	10	160	125
32	140	115	90	4	15	12	170	125
40	160	120	95	4	15	12	190	140

