GB MARINE GLOBE VALVE

Marine Cast Steel Angle Globe Valve GB/T584-2008 Type B/BS

ISO9001 Supplier

Class Certificate

Export Supply

Design Standard:GB/T584-2008, CBM1048-81, CBM1051-81, CBM1057-81 Test Standard: GB600 Flange size as per GB569,GB2501 *Marine Angle Globe Valve also can be called Marine Angle Stop Valve. ...



Key Highlights

Category	GB Marine Globe Valve
Standard	GB
Material	Cast Steel
Weight / Size	GB600 Flange size as per GB569,GB2501 *Marine Angle Globe Valve also can...
Certificate	CCS, BV, ABS, GL, LR, DNV, NK,RINA, KR,IRS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


Technical Specifications

Category	GB Marine Globe Valve	**Model / SKU**	Marine-Cast-Steel-Angle-Globe-Valve-GB-T584-2008-Type-B-BS
Standard	GB	**Material**	Cast Steel
Weight / Size	GB600 Flange size as per GB569,GB2501 *Marine Angle Globe Valve also can be called Marine Angle Stop Valve.	**Certificate**	CCS, BV, ABS, GL, LR, DNV, NK,RINA, KR,IRS
Warranty	12 Months unless specified otherwise	**Origin**	China

CONTENTS

- China Marine Cast Steel Angle Globe Valve GB/T584-2008 Type B/BS:
- Main Material:
- Main Size List(mm):

China Marine Cast Steel Angle Globe Valve GB/T584-2008 Type B/BS:

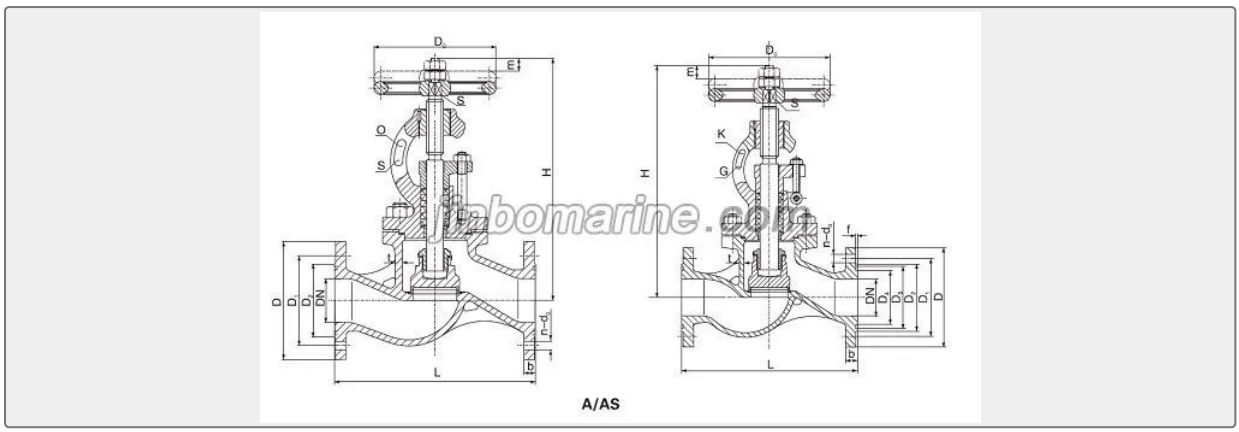

Design Standard:GB/T584-2008, CBM1048-81, CBM1051-81, CBM1057-81

Test Standard: GB600

Flange size as per GB569,GB2501

*Marine Angle Globe Valve also can be called Marine Angle Stop Valve.

Nominal Pressure(Mpa)	Nominal Diameter(mm)	Applicalbel Medium
1.0	65~300	fresh water, lubrication oil, fuel oil, steam not over 300℃
1.6	65~250	
2.5	20~150	
4.0	65~100	fresh water, lubrication oil, fuel oil, steam not over 400℃
6.4	20~50	

Main Material:

Body-Cast Steel

Bonnet-Cast Steel

Disc-Carbon Steel

Sealing Ring-Welded Stainless Steel

Stem-Stainless Steel

Main Size List(mm):

Type B (Flange Size as per GB569):

PN (MPa)	DN (mm)	Structure Dimension					Thickness δ	Flange					Bolt		Hand wheel		Lift Range m	Weight(kg)	
		L		H≈		H1													
		A	B	A	B	B		D	D1	D2	d0	b	n	Th.	Do	S		A	B

1.0	65	290	115	310	277	115	6	155	123	104	15	14	6	M14	140	12	18	14.9	12.9
	80	310	125	345	304	125	7	170	138	118	15	14	8	M14	160	14	24	19.0	17.9
	100	350	150	374	325	135	8	190	158	138	15	14	8	M14	180	14	35	28.6	24.0
	125	400	175	426	366	155	8	215	183	164	15	14	10	M14	200	17	44	38.2	33.7
	150	500	180	487	415	160	9	240	208	190	15	14	12	M14	200	17	57	51.3	41.9
1.6	125	400	175	465	405	155	8	225	187	168	17	15	10	M16	250	22	44	45.4	38.9
	150	500	180	524	452	160	9	255	217	196	17	15	12	M16	280	24	57	58.9	51.7
2.5	20	150	75	217	203	75	6	95	68	48	13	11	4	M12	80	8	7	4.5	4.4
	25	160	80	217	203	80	6	105	73	56	13	12	4	M12	80	8	7	5.1	5.0
	32	180	85	236	216	85	6	115	83	64	15	13	6	M14	100	9	9	6.9	6.1
	40	200	90	260	236	90	7	125	93	74	15	13	6	M14	120	11	11	9.2	7.2
	50	230	95	288	258	95	7	135	103	84	15	13	6	M14	140	12	14	12.9	12.7
	65	290	115	335	301	115	7	170	132	110	17	15	8	M16	160	14	18	18.8	18.9
	80	310	125	362	321	125	7	185	147	126	17	16	8	M16	200	17	24	24.8	22.7
	100	350	150	417	368	135	8	205	167	146	17	16	10	M16	250	22	35	34.9	31.3
	125	400	175	481	432	155	9	240	196	172	21	19	10	M20	280	24	44	52.2	47.9
	150	500	200	537	484	175	9	270	226	200	21	20	12	M20	320	27	57	68.5	60.3

PN (MPa)	DN (mm)	Structure Dimension					Thickness δ	Flange								Bolt		Hand wheel		Lift Range	Weight(kg)	
		L		H≈		H1																
		A	B	A	B	B		D	D1	D2	D3	D4	f	d0	b	n	Th.	D0	S	m	A	B

4.0	65	290	145	409	374	145	8	175	137	118	110	94	3	17	18	8	M16	250	22	17	35.2	32.9
	80	310	155	436	394	155	9	190	152	130	121	105	3	17	18	8	M16	250	22	20	39.1	36.7
	100	350	175	466	416	175	9	225	181	157	150	128	4	21	21	10	M20	280	24	25	53.3	44.7
6.4	20	230	115	261	243	115	7	105	73	58	51	35	3	13	13	6	M12	100	9	7	7.7	6.5
	25	230	115	272	253	115	7	115	83	66	58	42	3	15	15	6	M14	100	9	7	8.7	7.6
	32	260	130	304	281	130	7	125	93	74	66	50	3	15	17	6	M14	120	11	9	10.3	9.3
	40	260	130	334	310	130	7	145	107	84	76	60	3	17	19	6	M16	160	14	11	17.7	16.4
	50	300	150	354	323	150	8	155	117	96	88	72	3	17	20	6	M16	180	14	13	22.3	20.5