

JIS MARINE QUICK CLOSING VALVE

Marine Cast Steel Emergency Shut-Off Valve JIS F7399 5K

ISO9001 Supplier

Class Certificate

Export Supply

Marine Emergency Shut-Off Valve JIS F7399 is used to shut off the fuel oil or lubrication oil tank quickly in emergency . Operation type: Manual (Lever) or Pneumatically operated Design Standard: JIS F7399-19...



Key Highlights

Category	JIS Marine Quick Closing Valve
Standard	JIS
Material	Cast Steel, Nodular Iron
Weight / Size	JIS 7400-1996 Hydraulic Test Pressure:Body- 0.7Mpa, Seat-0.2Mpa,Seal for...
Certificate	CCS, BV, ABS, GL, LR, DNV, NK,RINA

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	JIS Marine Quick Closing Valve	Model / SKU	Marine-Cast-Steel-Emergency-Shut-Off-Valve-JIS-F7399-5K
Standard	JIS	Material	Cast Steel, Nodular Iron
Weight / Size	JIS 7400-1996 Hydraulic Test Pressure:Body- 0.7Mpa, Seat-0.2Mpa,Seal for quick closing-0.1Mpa Flange size as per JIS B2220 - 5K Main Material:	Certificate	CCS, BV, ABS, GL, LR, DNV, NK,RINA
Warranty	12 Months unless specified otherwise	Origin	China


CONTENTS

- China Marine Cast Steel Emergency Shut-Off Valve JIS F7399 5K:
- Main Material:
- Main Size List(mm):



0.052551s

China Marine Cast Steel Emergency Shut-Off Valve JIS F7399 5K:

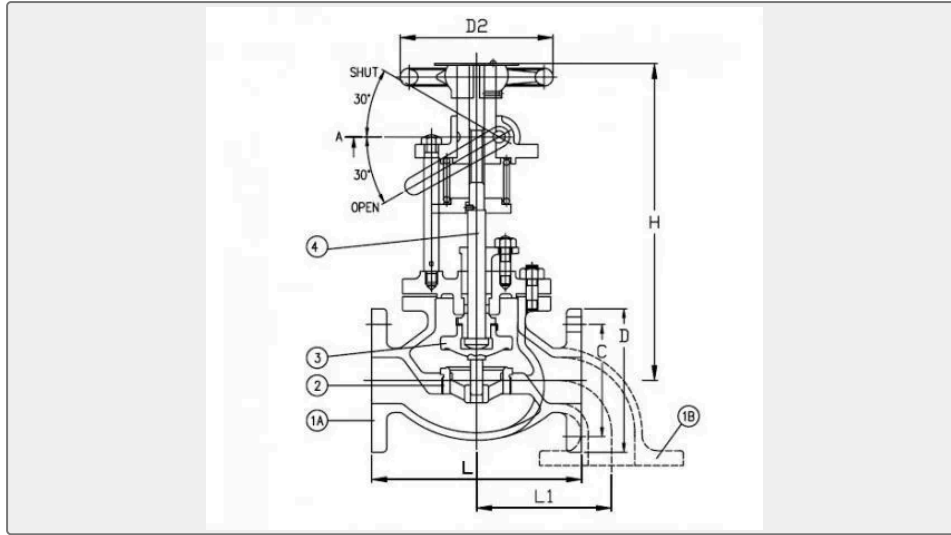

Marine Emergency Shut-Off Valve JIS F7399 is used to shut off the fuel oil or lubrication oil tank quickly in emergency .

Operation type: Manual (Lever) or Pneumatically operated

Design Standard: JIS F7399-1996

Test Standard: JIS 7400-1996

Hydraulic Test Pressure:Body- 0.7Mpa, Seat-0.2Mpa,Seal for quick closing-0.1Mpa

Flange size as per JIS B2220 - 5K

Main Material:

Body: Cast Steel

Bonnet: Cast Steel

Seat: Brass

Disc: Brass

Stem: Brass

Operation Spindle: SUS403

Operation Lever: SUS403

Handwheel: FC200 (Cast iron)

Main Size List(mm):

DN	L	D	C	No of bolt hole	bolt hole diameter	flange thickness	H	D2
40	160	120	95	4	15	12	310	140
50	210	130	105	4	15	14	335	160
65	250	155	130	4	15	14	395	180
80	280	180	145	4	19	18	420	180



100	340	200	165	8	19	18	510	224
125	410	235	200	8	19	20	440	250
150	480	265	230	8	19	22	520	320