

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

CB MARINE GATE VALVE

Marine Cast Steel Gate Valve CB/T466-1995

ISO9001 Supplier

Class Certificate

Export Supply

Marine cast steel gate valve is used on the pipe system for sea water, fresh water, lubrication oil. Design Standard: CB/T466-1995 Test Standard: GB600 Flange Size as per GB569 or GB2501 ...



Key Highlights

Category	CB Marine Gate Valve
Standard	GB
Material	Cast Steel
Weight / Size	GB600 Flange Size as per GB569 or GB2501 nominal pressure (Mpa) nominal ...
Certificate	CCS, BV, ABS, GL, LR, DNV, NK, RINA, KR, IRS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications


Category	CB Marine Gate Valve	Model / SKU	Marine-Cast-Steel-Gate-Valve-CB-T466-1995
Standard	GB	Material	Cast Steel
Weight / Size	GB600 Flange Size as per GB569 or GB2501 nominal pressure (Mpa) nominal diameter(mm) applicable medium 1.0 50-100 sea water, fresh water, lubrication oil 0.6 125-150 0.4 175-300 0.25 350-500 Main Parts & Material:	Certificate	CCS, BV, ABS, GL, LR, DNV, NK, RINA, KR, IRS
Warranty	12 Months unless specified otherwise	Origin	China


 0.042418s

CONTENTS

- China Marine Cast Steel Gate Valve CB/T466-1995:
- Main Parts & Material:
- Main Size List(mm):

China Marine Cast Steel Gate Valve CB/T466-1995:

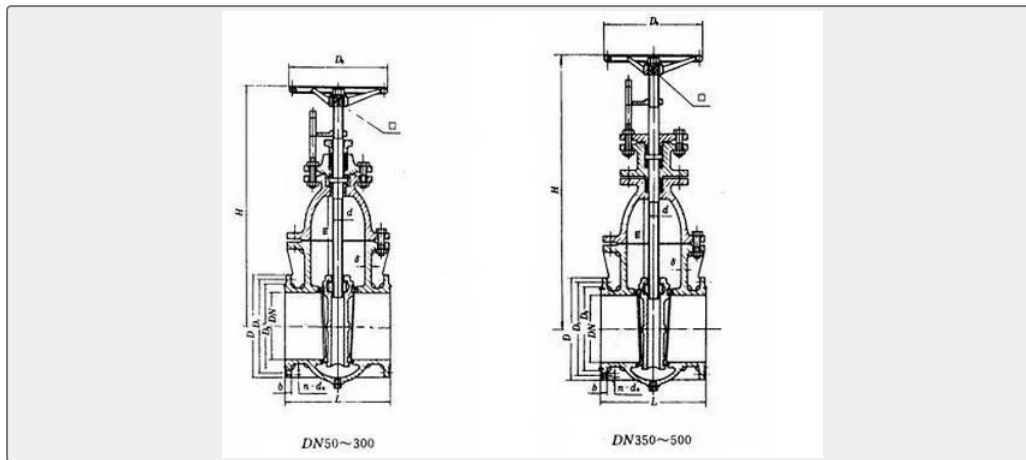

Marine cast steel gate valve is used on the pipe system for sea water, fresh water, lubrication oil.

Design Standard: CB/T466-1995

Test Standard: GB600

Flange Size as per GB569 or GB2501

nominal pressure (Mpa)	nominal diameter(mm)	applicable medium
1.0	50-100	sea water, fresh water, lubrication oil
0.6	125-150	
0.4	175-300	
0.25	350-500	

Main Parts & Material:

Body-Cast Steel

Bonnet-Cast Steel

Disc-Cast Steel

Stem-Stainless Steel

Nut-Bronze

Seal Ring-Stainless Steel

Main Size List(mm):

For Type A:

PN Mpa	DN (m m)	Structure Dimension		Flange					Bolt		Thicknes s δ	stem		hand whee l D0	Lift Range m	Weigh t (kg)
		L≈	H≈	D	D1	D2	b	d 0	n	Th.		d	□			
1.0	50	190	340	13 5	10 3	84	1 3	1 5	6	M1 4	8	Tr22×10(P5)LH	1 4	180	60	18
	65	200	372	15 5	12 3	10 4	1 4	1 5	6	M1 4	9	Tr22×10(P5)LH	1 4	180	75	20
	80	220	430	17 9	13 8	11 8	1 4	1 5	8	M1 4	9	Tr24×10(P5)LH	1 7	200	92	25
	100	220	460	19 0	15 8	13 8	1 4	1 5	8	M1 4	10	Tr24×10(P5)LH	1 7	200	112	28
0.6	125	242	528	21 5	18 3	16 4	1 4	1 5	1 0	M1 4	10	Tr26×10(P5)LH	1 9	225	138	41
	150	248	566	24 0	20 8	19 0	1 4	1 5	1 2	M1 4	10	Tr26×10(P5)LH	1 9	225	165	51
0.4	175	268	630	27 0	23 8	22 1	1 5	1 5	1 2	M1 4	11	Tr28×10(P5)LH	2 2	250	190	70
	200	278	685	29 5	26 4	24 7	1 5	1 5	1 2	M1 4	11	Tr28×10(P5)LH	2 2	250	215	80
	250	310	755	36 5	32 7	30 6	1 6	1 6	1 4	M1 6	13	Tr30×12(P6)LH	2 4	280	265	111
	300	345	835	43 0	38 6	36 0	1 9	1 9	1 4	M2 0	13	Tr30×12(P6)LH	2 4	280	315	134
0.2 5	350	400	954	48 0	43 6	41 0	2 0	2 0	1 6	M2 0	14	Tr36×12(P6)LH	2 7	320	365	219
	400	430	1045	53 0	48 6	46 0	2 1	2 1	1 6	M2 0	15	Tr36×12(P6)LH	2 7	360	418	267
	450	460	1228	58 0	53 6	51 2	2 1	2 1	1 8	M2 0	16	Tr40×12(P6)LH	3 2	400	421	395
	500	480	1315	63 5	59 1	56 7	2 1	2 1	2 0	M2 0	16	Tr40×12(P6)LH	3 2	450	518	519

For Type AS:

PN Mpa	DN (mm)	Structure Dimension		Flange					Bolt		stem		hand whee l D0	Lift Range m	Weigh t (kg)
		L≈	H≈	D	D1	D2	b	d 0	n	Th.	d	□			

1.0	50	178	340	16 5	12 5	10 2	2 0	1 8	4	M1 6	Tr22×10(P5)L H	1 4	180	60	20.3
	65	190	372	18 5	14 5	12 2	2 0	1 8	4	M1 6	Tr22×10(P5)L H	1 4	180	75	24.5
	80	203	430	20 0	16 0	13 3	2 0	1 8	8	M1 6	Tr24×10(P5)L H	1 7	200	92	33.8
	100	229	460	22 0	18 0	15 8	2 2	1 8	8	M1 6	Tr24×10(P5)L H	1 7	200	112	41.2
0.6	125	254	528	24 0	20 0	17 8	2 0	1 8	8	M1 6	Tr26×10(P5)L H	1 9	225	138	62.1
	150	267	566	26 5	22 5	20 2	2 0	1 8	8	M1 6	Tr26×10(P5)L H	1 9	225	165	71.6
0.4	175	292	630	29 5	25 5	23 2	2 2	1 8	8	M1 6	Tr28×10(P5)L H	2 2	250	190	86.4
	200	292	685	32 0	28 0	25 8	2 2	1 8	8	M1 6	Tr28×10(P5)L H	2 2	250	215	101.8
	250	330	755	37 5	33 5	31 2	2 4	2 2	1 2	M2 0	Tr30×12(P6)L H	2 4	280	265	155.1
	300	356	835	44 0	39 5	36 5	2 4	2 2	1 2	M2 0	Tr30×12(P6)L H	2 4	280	315	201.2
0.2 5	350	381	954	49 0	44 5	41 5	2 6	2 2	1 2	M2 0	Tr36×12(P6)L H	2 7	320	365	298.3
	400	406	1145	54 0	49 5	46 5	2 8	2 2	1 6	M2 0	Tr36×12(P6)L H	2 7	360	418	372.1
	450	432	1330	59 5	55 0	52 0	2 8	2 2	1 6	M2 0	Tr40×12(P6)L H	3 2	400	468	560.0
	500	457	1420	64 5	60 0	57 0	3 0	2 2	2 0	M2 0	Tr40×12(P6)L H	3 2	450	510	627.4