

JIS MARINE GLOBE VALVE

Marine Cast Steel Globe Valve JIS F7311 5K

- ISO9001 Supplier
- Class Certificate
- Export Supply

Design Standard: JIS F7311-1996 Test Standard: JIS 7400-1996 Hydraulic Test Pressure: Body- 1.05Mpa, Seat-0.77Mpa Flange size as per JIS B2220 - 5K Main Material: Body: Cast Steel (SC...



Key Highlights

Category	JIS Marine Globe Valve
Standard	JIS
Material	Cast Steel
Weight / Size	Body- 1.05Mpa, Seat-0.77Mpa Flange size as per JIS B2220 - 5K Main Mater...
Certificate	CCS, BV, ABS, GL, LR, DNV, NK,RINA, KR,IRS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


Technical Specifications

Category	JIS Marine Globe Valve	Model / SKU	Marine-Cast-Steel-Globe-Valve-JIS-F7311-5K
Standard	JIS	Material	Cast Steel
Weight / Size	Body- 1.05Mpa, Seat-0.77Mpa Flange size as per JIS B2220 - 5K Main Material:	Certificate	CCS, BV, ABS, GL, LR, DNV, NK,RINA, KR,IRS
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS	<ul style="list-style-type: none"> ■ China Marine Cast Steel Globe Valve JIS F7311 5K: ■ Main Size List(mm): 	<ul style="list-style-type: none"> ■ Main Material:
-----------------	--	--



China Marine Cast Steel Globe Valve JIS F7311 5K:

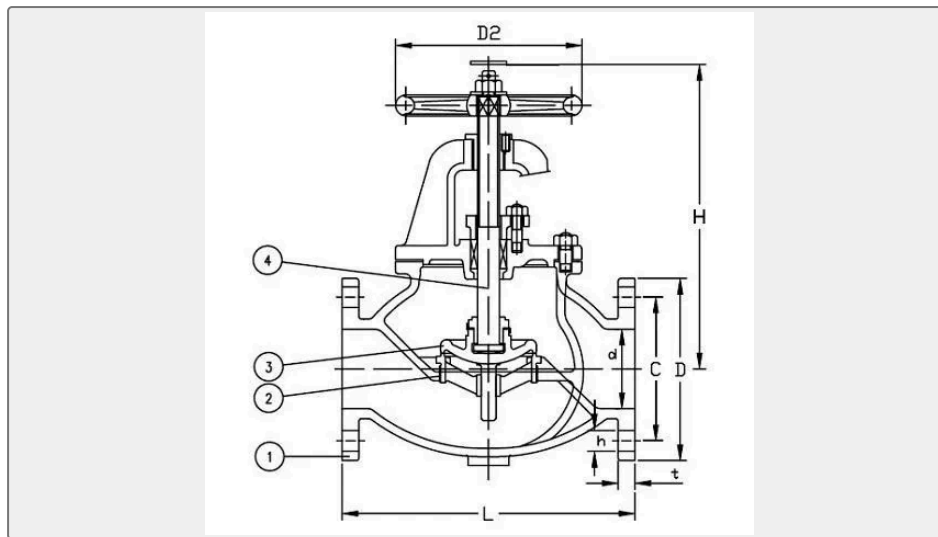

Design Standard: JIS F7311-1996

Test Standard: JIS 7400-1996

Hydraulic Test Pressure: Body- 1.05Mpa, Seat-0.77Mpa

Flange size as per JIS B2220 - 5K

Main Material:

Body: Cast Steel (SC480)

Bonnet: Cast Steel (SC480)

Packing Gland: Bronze (BC6) or Stainless Steel (2Cr13)

Stem: C3771BD (Brass) or SUS403

Seat: Bronze (BC6) or Stainless Steel (2Cr13, SCS2)

Disc: Bronze (BC6) or Stainless Steel (2Cr13, SCS2)

Gasket: non-asbestos

Main Size List(mm):

Size	L	D	C	No of Bolt Hole	h	t	H	D2
50	210	130	105	4	15	16	270	160
65	250	155	130	4	15	18	300	180
80	280	180	145	4	19	18	310	180
100	340	200	165	8	19	20	360	224
125	410	235	200	8	19	20	390	250
150	480	265	230	8	19	22	445	280
200	570	320	280	8	23	24	530	315

250	740	385	345	12	23	26	650	355
300	840	430	390	12	23	28	740	400
350	840	480	435	12	25	30	840	500
400	1050	540	495	16	25	30	940	630