

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

CB MARINE STORM VALVE

Marine Cast Steel Screw Down Vertical Storm Valve CB/T3477-92 Type A/AS

ISO9001 Supplier

Class Certificate

Export Supply

Marine Screw Down Vertical Storm Valve is used on the pipe system with the medium sea water, fresh water & sewage. It can be closed by the handwheel. Design Standard:CB/T3477-92 Test Standard: GB600 ...



Key Highlights

Category	CB Marine Storm Valve
Standard	GB
Material	Cast Steel
Weight / Size	GB600 Type A- Straight Type, Flange size as per GB569 Type AS-Straight T...
Certificate	CCS, BV, ABS, GL, LR, DNV, NK,RINA, KR,IRS


We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.



Technical Specifications			
Category	CB Marine Storm Valve	Model / SKU	Marine-Cast-Steel-Screw-Down-Vertical-Storm-Valve-CB-T3477-92-Type-A-AS
Standard	GB	Material	Cast Steel
Weight / Size	GB600 Type A- Straight Type, Flange size as per GB569 Type AS-Straight Type, Flange size as per GB2501 Type B- Angle Type, Flange size as per GB569 Type BS-Angle Type, Flange size as per GB2501 Type Nominal Pressure (Mpa) Nominal Size (mm) Applicable medium A,AS,B,BS 0.1 50-150 sea water, fresh water & sewage Main Parts & Material:	Certificate	CCS, BV, ABS, GL, LR, DNV, NK,RINA, KR,IRS
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS	<ul style="list-style-type: none"> ■ China Marine Cast Steel Screw Down Vertical Storm Valve CB/T3477-92 Type A/AS: ■ Main Size List(mm): ■ Main Parts & Material:
-----------------	---

China Marine Cast Steel Screw Down Vertical Storm Valve CB/T3477-92 Type A/AS:

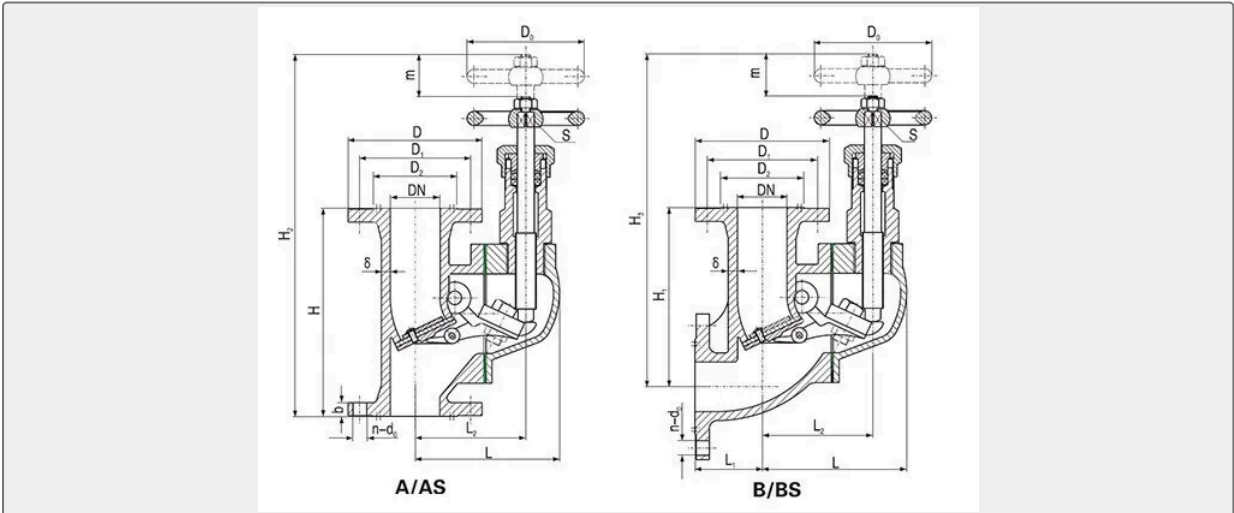

Marine Screw Down Vertical Storm Valve is used on the pipe system with the medium sea water, fresh water & sewage. It can be closed by the handwheel.

Design Standard:CB/T3477-92

Test Standard: GB600



Type A- Straight Type, Flange size as per GB569

Type AS-Straight Type, Flange size as per GB2501

Type B- Angle Type, Flange size as per GB569

Type BS-Angle Type, Flange size as per GB2501

Type	Nominal Pressure (Mpa)	Nominal Size (mm)	Applicable medium
A,AS,B,BS	0.1	50-150	sea water, fresh water & sewage

Main Parts & Material:

Body-Cast Steel

Bonnet-Cast Steel

Disc-Bronze

Stem-Bronze

Clamp Material-Brass

Main Size List(mm):

For Type A,B:

nomin al diameter	structure dimension								Thickn ess δ	flange connection dimension					bolt		hand wheel		Lift Range m	Weight(k g)	
	H	H1	H2	H3	L	L1	L2	cast steel		D	D1	D2	b	d 0	n	Th.	Do	S		cast steel	
																				A	B
50	21 0	17 0	36 0	32 7	13 5	90	10 0	7.5	13 5	10 3	84	1 3	1 5	6	M1 4	80	11	40	12	13	
65	24 0	20 0	38 5	34 2	14 2	11	11 0	8.0	15 5	12 3	10 4	1 4	1 5	6	M1 4	80	11	45	17	19	
80	26 0	22 0	40 0	37 0	15 5	12	12 0	8.5	17 0	13 8	11 8	1 4	1 5	8	M1 4	80	11	45	22	24	
100	28 0	25 0	43 0	39 3	17 2	13	13 7	9.0	19 0	15 8	13 8	1 4	1 5	8	M1 4	80	11	45	30	35	
125	33 0	27 0	46 5	40 7	19 5	15	16 0	10.0	21 5	18 3	16 4	1 4	1 5	1 0	M1 4	80	11	65	44	50	
150	36 0	31 0	49 0	43 7	21 3	16	17 4	11.0	24 0	20 8	19 0	1 4	1 5	1 2	M1 4	12 0	11	65	52	67	

For Type AS, BS:

nominal diameter	structure dimension							Thickness δ	flange connection dimension					bolt		hand wheel		Lift Range m	Weight(kg)	
	H	H1	H2	H3	L	L1	L2		cast steel	D	D1	D2	b	d0	n	Th.	Do		S	AS
50	210	170	360	327	135	90	100	8.0	140	110	90	16	14	4	M12	80	11	40	12	13
65	240	200	385	342	142	110	110	8.0	160	130	110	16	14	4	M12	80	11	45	17	19
80	260	220	400	370	155	120	120	9.0	190	150	128	18	16	4	M16	80	11	45	22	24
100	280	250	430	393	172	130	137	9.0	210	170	148	20	18	4	M16	80	11	45	30	35
125	330	270	465	407	195	150	160	10.0	240	200	178	24	20	8	M16	80	11	65	44	50
150	360	310	490	437	213	165	174	10.0	265	225	202	28	24	8	M16	120	11	65	52	67