CB MARINE STORM VALVE

Marine Flange Cast Steel Storm Valve CB/T3475-92 Type A/AS

ISO9001 Supplier

Class Certificate

Export Supply

Marine Bronze/Cast Steel Storm Valve is used in the fresh water, sea water or sewage pipe system. Design Standard: CB/T3475-92 Flange Standard: GB569 or GB2501 Test and Inpsection Standard: GB600 ...



Key Highlights

Category	CB Marine Storm Valve
Standard	GB
Material	Cast Steel
Weight / Size	Body--Cast Steel / Bronze Bonnet--Cast Steel / Bronze Disc--Bronze Gland...
Certificate	CCS, BV, DNV, LR, ABS, NK,IRS, RMRS, GL

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


Technical Specifications

Category	CB Marine Storm Valve	**Model / SKU**	Marine-Flange-Cast-Steel-Storm-Valve-CB-T3475-92-Type-A-AS
Standard	GB	**Material**	Cast Steel
Weight / Size	Body--Cast Steel / Bronze Bonnet--Cast Steel / Bronze Disc--Bronze Gland--Brass Main Size(mm):	**Certificate**	CCS, BV, DNV, LR, ABS, NK,IRS, RMRS, GL
Warranty	12 Months unless specified otherwise	**Origin**	China

CONTENTS

- China Marine Flange Cast Steel Storm Valve CB/T3475-92 Type A/AS:
- Main Parts & Material:
- Technical Data:
- Main Size(mm):

China Marine Flange Cast Steel Storm Valve CB/T3475-92 Type A/AS:

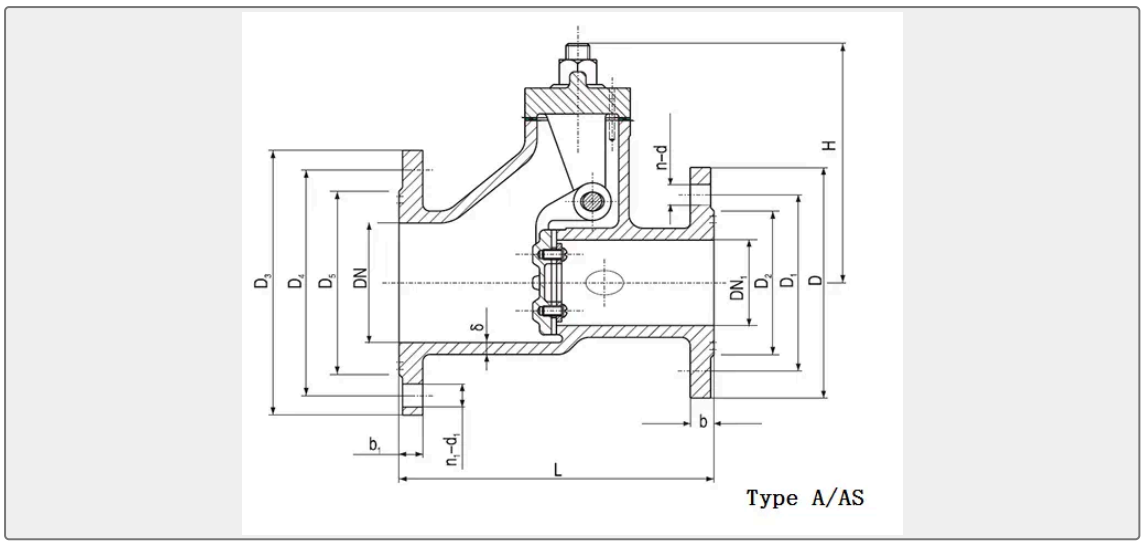

Marine Bronze/Cast Steel Storm Valve is used in the fresh water, sea water or sewage pipe system.

Design Standard: CB/T3475-92

Flange Standard: GB569 or GB2501

Test and Inpsection Standard: GB600

Technical Data:

Type	Nominal Pressure (Mpa)	Nominal Diameter(mm)	Medium
A,AS	0.1	50~100	sea water, fresh water,sewage
B,BS	0.1	50~150	

Main Parts & Material:

Body--Cast Steel / Bronze

Bonnet--Cast Steel / Bronze

Disc--Bronze

Gland--Brass

Main Size(mm):

Type A/B:

nominal diameter	export diameter	structure dimension				Thickness δ		connecting dimention of inlet flange					bolt		connecting dimention of outlet flange					bolt		Weight(kg)			
		L		H																		cast steel		bronze	
		A	B	A	B	cast steel	bronze	D	D1	D2	b	d	n	Th.	D3	D4	D5	b1	d1	n	Th.	A	B	A	B
50	65	185	205	120	90	7.5	5	135	103	84	14	15	6	M14	155	123	104	14	15	6	M14	8	9	8	9
65	80	200	226	130	100	8	6	155	123	104	14	15	6	M14	170	138	118	14	15	8	M14	10	11	11	12
80	100	226	260	150	120	8.5	6	170	138	118	14	15	8	M14	190	158	138	14	15	8	M14	14	15	15	16
100	125	250	300	175	140	9	6	190	158	138	14	15	8	M14	215	183	164	14	15	10	M14	23	24	24	23
125	150	–	350	–	165	10	7	215	183	164	14	15	10	M14	240	208	190	14	15	12	M14	–	33	–	33
150	175	–	370	–	170	11	7	240	208	190	14	15	12	M14	270	238	221	15	15	12	M14	–	35	–	38

Type AS/BS:

nominal diameter	export diameter	structure dimension				Thickness δ		connecting dimention of inlet flange					bolt		connecting dimention of outlet flange					bolt		Weight(kg)			
		L		H																		cast steel		bronze	
		AS	BS	AS	BS	cast steel	bronze	D	D1	D2	b	d	n	Th.	D3	D4	D5	b1	d1	n	Th.	AS	BS	AS	BS
50	65	185	205	120	90	7.5	5	140	110	90	16	14	4	M12	160	130	110	16	14	4	M12	8	9	8	9
65	80	200	226	130	100	8	6	160	130	110	16	14	4	M12	190	150	128	18	18	4	M16	10	13	11	13
80	100	226	260	150	120	8.5	6	190	150	128	18	18	4	M16	210	170	148	18	18	4	M16	15	18	16	19

100	125	250	300	175	140	9	6	210	170	148	18	18	4	M16	240	200	178	20	18	8	M16	25	27	26	28
125	150	–	350	–	165	10	7	240	200	178	20	18	8	M16	265	225	202	20	18	8	M16	–	41	–	41
150	175	–	370	–	170	11	7	265	225	202	20	18	8	M16	295	255	232	22	18	8	M16	–	50	–	51