

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

MARINE DECK COVERING


Marine Leveling Deck Covering

Main Specification No. Item name Index Standard 1 Initial setting time ≥ 1 h...

ISO9001 Supplier

Class Certificate

Export Supply

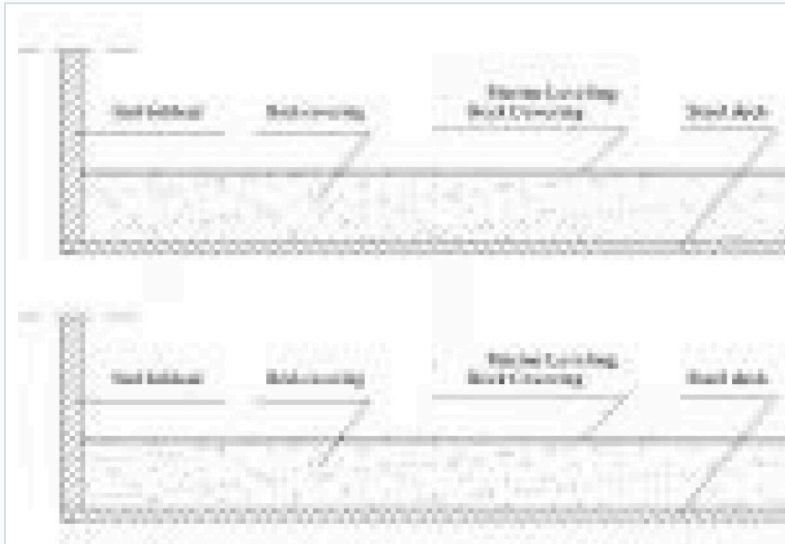

Key Highlights

Category	Marine Deck Covering
Standard	DIN
Material	Dry material (A component):
Weight / Size	Item name Index Standard 1 Initial setting time ≥ 1 h Q/HCF1-2004 2 Final ...
Certificate	CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	Marine Deck Covering	Model / SKU	Marine-Leveling-Deck-Covering
Standard	DIN	Material	Dry material (A component):
Weight / Size	Item name Index Standard 1 Initial setting time ≥ 1 h Q/HCF1-2004 2 Final setting time ≤ 8 h 3 Modulus of rupture ≥ 3.5 MPa 4 Compressive strength ≥ 10 MPa 5 Density ≤ 1800 kg/m ³ 6 Water absorption $\leq 10\%$ 7 Oil absorption $\leq 5\%$ 8 Heat conductivity 250mm $<\Phi$ <300 mm 9 Not readily ignitability, smoke & toxicity In accordance with IMO.FTPC Parts 2,5/IMO.A653(16) 10 Weight per square meter ≤ 4.5 kg/2mm/m ² Feature Characteristic:	Certificate	CCS
Warranty	12 Months unless specified otherwise	Origin	China


 0.043363s

CONTENTS

■ Main Specification

■ Feature

■ Consume amount:

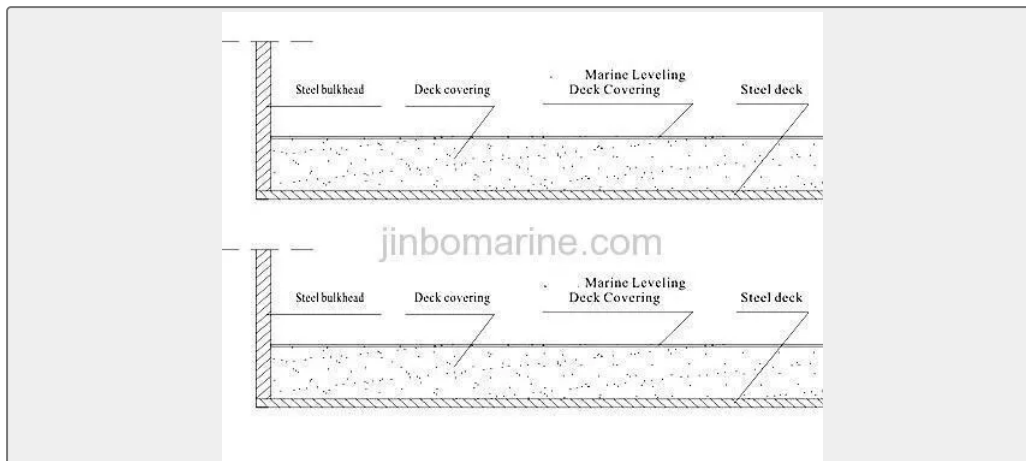

Main Specification

No.	Item name	Index	Standard
1	Initial setting time	≥1h	Q/HCF1-2004
2	Final setting time	≤8h	
3	Modulus of rupture	≥3.5MPa	
4	Compressive strength	≥10MPa	
5	Density	≤1800kg/m ³	
6	Water absorption	≤10%	
7	Oil absorption	≤5%	
8	Heat conductivity	250mm<Φ<300mm	
9	Not readily ignitability, smoke & toxicity	In accordance with IMO.FTPC Parts 2,5/IMO.A653(16)	
10	Weight per square meter	≤4.5kg/2mm/m ²	

Feature

Characteristic: Form with flat and smooth

Applied: Patch up the roughness of each primary covering application and the leveling coat of A-60 class deck

Consume amount:

4.0~4.5 kg/m²

Packing: Dry material (A component): 18 kg/pack; Liquid (B component): 5.5kg/barrel (Determinate according to the temp. and humidity)

Storage: Cool and dry place, moisture-proof, the quality guarantee period is 3 months

Certificate: CCS

For more details, please feel free to contact us.

