

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

MARINE TOOLS

Non-Sparking Hex Key Wrench

These Non-Sparking Hex Key Wrench are made of Aluminum Bronze and Beryllium Copper, it is a high quality grade beryllium copper alloy material and a standard grade aluminum-bronze alloy. These tools are non-magnetic and...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights


Category	Marine Tools
Standard	EN
Material	Aluminum Bronze, Beryllium Copper
Weight / Size	S inch L mm H mm Weight (g) Aluminum Bronze Beryllium Copper 1/16 59 25 ...
Certificate	EACC, IAF

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications			
Category	Marine Tools	Model / SKU	Non-Sparking-Hex-Key-Wrench
Standard	EN	Material	Aluminum Bronze, Beryllium Copper
Weight / Size	S inch L mm H mm Weight (g) Aluminum Bronze Beryllium Copper 1/16 59 25 6 8 5/64 59 25 6 8 3/32 59 25 6 8 7/64 59 25 6 8 1/8 59 25 6 8 9/64 64 29 7 8 5/32 65 30 9 10 3/16 79 31 14 15 7/32 85 37 18 20 1/4 85 37 27 30 9/32 88 43 40 45 5/16 92 44 44 48 11/32 97 44 45 50 3/8 110 45 80 85 7/16 119 48 100 110 1/2 140 55 155 170 9/16 150 58 180 195 5/8 162 63 245 270 11/16 168 65 325 355 3/4 178 73 415 450 13/16 184 77 520 565 7/8 187 79 595 650 15/16 192 82 755 825 1 200 85 840 925 1-1/16 213 93 1115 1220	Certificate	EACC, IAF
Warranty	12 Months unless specified otherwise	Origin	China

China Non-Sparking Hex Key Wrench:

These Non-Sparking Hex Key Wrench are made of Aluminum Bronze and Beryllium Copper, it is a high quality grade beryllium copper alloy material and a standard grade aluminum-bronze alloy. These tools are non-magnetic and non-corrosion, very suitable used for LPG and LNG vessels, and oil-gas industry etc.

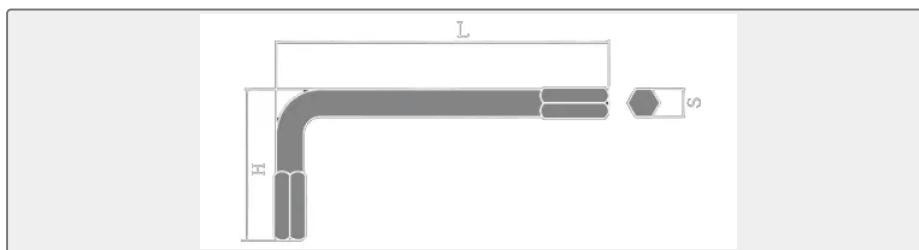

S inch	L mm	H mm	Weight (g)	
			Aluminum Bronze	Beryllium Copper
1/16	59	25	6	8
5/64	59	25	6	8
3/32	59	25	6	8
7/64	59	25	6	8
1/8	59	25	6	8

9/64	64	29	7	8
5/32	65	30	9	10
3/16	79	31	14	15
7/32	85	37	18	20
1/4	85	37	27	30
9/32	88	43	40	45
5/16	92	44	44	48
11/32	97	44	45	50
3/8	110	45	80	85
7/16	119	48	100	110
1/2	140	55	155	170
9/16	150	58	180	195
5/8	162	63	245	270
11/16	168	65	325	355
3/4	178	73	415	450
13/16	184	77	520	565
7/8	187	79	595	650
15/16	192	82	755	825
1	200	85	840	925
1-1/16	213	93	1115	1220