

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

MARINE TOOLS

Non-Sparking Striking Open Wrench

These Non-Sparking Striking Open Wrench are made of Aluminum Bronze and Beryllium Copper, it is a high quality grade beryllium copper alloy material and a standard grade aluminum-bronze alloy. These tool...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights


Category	Marine Tools
Standard	EN
Material	Aluminum Bronze, Beryllium Copper
Weight / Size	S Inch L mm Weight (g) Aluminum Bronze Beryllium Copper 3/4 125 135 150 ...
Certificate	EACC, IAF

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications			
Category	Marine Tools	Model / SKU	Non-Sparking-Striking-Open-Wrench
Standard	EN	Material	Aluminum Bronze, Beryllium Copper
Weight / Size	S Inch L mm Weight (g) Aluminum Bronze Beryllium Copper 3/4 125 135 150 7/8 135 175 195 15/16 150 1220 245 1 175 300 335 1-1/8 190 390 435 1-1/4 190 460 515 1-7/16 210 730 800 1-1/2 220 780 860 1-5/8 230 860 955 1-3/4 250 1100 1225 1-7/8 250 1100 1225 2 275 1400 1550 2-1/8 305 1680 1850 2-1/4 315 1970 2190 2-3/8 315 2780 2190 2-1/2 335 3660 30690 2-3/4 370 3880 4030 3 375 5130 4200 3-1/8 400 7050 5650 3-1/2 445 7000 7800 3-3/4 445 10500 7730 4 485 12000 11600	Certificate	EACC, IAF
Warranty	12 Months unless specified otherwise	Origin	China

China Non-Sparking Striking Open Wrench:

These Non-Sparking Striking Open Wrench are made of Aluminum Bronze and Beryllium Copper, it is a high quality grade beryllium copper alloy material and a standard grade aluminum-bronze alloy. These tools are non-magnetic and non-corrosion, very suitable used for LPG and LNG vessels, and oil-gas industry etc.

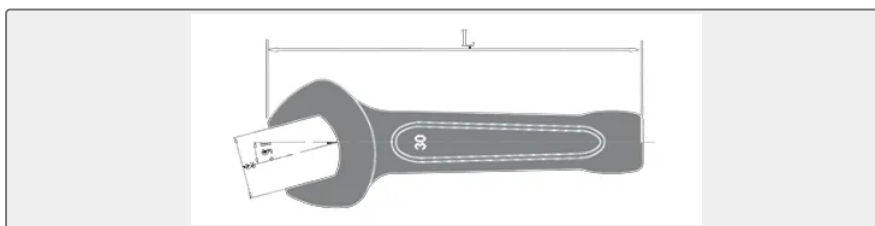

S Inch	L mm	Weight (g)	
		Aluminum Bronze	Beryllium Copper
3/4	125	135	150
7/8	135	175	195
15/16	150	1220	245
1	175	300	335
1-1/8	190	390	435

1-1/4	190	460	515
1-7/16	210	730	800
1-1/2	220	780	860
1-5/8	230	860	955
1-3/4	250	1100	1225
1-7/8	250	1100	1225
2	275	1400	1550
2-1/8	305	1680	1850
2-1/4	315	1970	2190
2-3/8	315	2780	2190
2-1/2	335	3660	30690
2-3/4	370	3880	4030
3	375	5130	4200
3-1/8	400	7050	5650
3-1/2	445	7000	7800
3-3/4	445	10500	7730
4	485	12000	11600