

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

MARINE TOOLS

Non-sparking 1/2 inch Sockets

Non-sparking 1/2" Sockets : Uses: In flammable and explosive places, used in places with special positions and narrow spaces, used in spaces where adjustable wrenches and open wrenches cannot be used, used fo...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Marine Tools
Standard	EN
Material	Beryllium bronze alloy, Aluminum Copper alloy
Weight / Size	Socket 1/2 inch Weight (g) S mm L mm Aluminum Bronze Beryllium Copper 6 ...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.




Technical Specifications			
Category	Marine Tools	Model / SKU	Non-sparking-1-2-inch-Sockets
Standard	EN	Material	Beryllium bronze alloy, Aluminum Copper alloy
Weight / Size	Socket 1/2 inch Weight (g) S mm L mm Aluminum Bronze Beryllium Copper 6 40 69 75 7 40 70 77 8 40 70 77 9 40 71 78 10 40 71 78 11 40 72 79 12 40 72 79 13 40 73 80 14 40 73 80 15 40 85 94 16 40 85 94 17 40 85 94 18 42 85 94 19 42 100 110 20 42 105 120 21 43 110 125 22 43 115 130 23 43 135 150 24 43 145 165 25 43 160 180 26 43 180 200 27 46 190 215 28 46 200 225 29 46 210 235 30 46 220 250 32 46 260 295 Socket 1/2 inch Weight (g) S inch L mm Aluminum Bronze Beryllium Copper 5/16 40 70 70 3/8 40 71 78 7/16 40 72 79 1/2 40 73 80 9/16 40 73 80 5/8 40 80 88 11/16 40 85 93 3/4 42 100 110 13/16 43 110 125 7/8 43 115 130 15/16 43 145 165 1 43 170 190 1-1/16 46 190 215 1-1/4 46 260 295 1-7/16 50 300 330	Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
Warranty	12 Months unless specified otherwise	Origin	China

Non-sparking 1/2" Sockets :

Uses: In flammable and explosive places, used in places with special positions and narrow spaces, used in spaces where adjustable wrenches and open wrenches cannot be used, used for fastening or removing hexagon bolts and nuts.

Material : Beryllium bronze alloy, Aluminum Copper alloy.

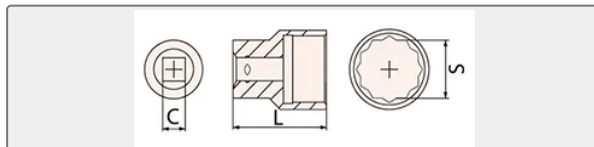

Socket 1/2 inch		Weight (g)	
S mm	L mm	Aluminum Bronze	Beryllium Copper



6	40	69	75
7	40	70	77
8	40	70	77
9	40	71	78
10	40	71	78
11	40	72	79
12	40	72	79
13	40	73	80
14	40	73	80
15	40	85	94
16	40	85	94
17	40	85	94
18	42	85	94
19	42	100	110
20	42	105	120
21	43	110	125
22	43	115	130
23	43	135	150
24	43	145	165
25	43	160	180
26	43	180	200
27	46	190	215
28	46	200	225
29	46	210	235
30	46	220	250
32	46	260	295

Socket 1/2 inch		Weight (g)	
S inch	L mm	Aluminum Bronze	Beryllium Copper
5/16	40	70	70
3/8	40	71	78
7/16	40	72	79



1/2	40	73	80
9/16	40	73	80
5/8	40	80	88
11/16	40	85	93
3/4	42	100	110
13/16	43	110	125
7/8	43	115	130
15/16	43	145	165
1	43	170	190
1-1/16	46	190	215
1-1/4	46	260	295
1-7/16	50	300	330