

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

MARINE TOOLS

Non-sparking 1 inch Heavy Sockets


Non-sparking 1" Heavy Sockets: Uses: In flammable and explosive places, used in places with special positions and narrow spaces, used in spaces where adjustable wrenches and open wrenches cannot be used, use...

ISO9001 Supplier

Class Certificate

Export Supply

	Key Highlights	
	Category	Marine Tools
	Standard	EN
	Material	Beryllium bronze alloy, Aluminum Copper alloy
	Weight / Size	Socket 1 inch Weight (g) S mm L mm Aluminum Bronze Beryllium Copper 22 5...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	
<p>We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.</p>		





Technical Specifications			
Category	Marine Tools	Model / SKU	Non-sparking-1-inch-Heavy-Sockets
Standard	EN	Material	Beryllium bronze alloy, Aluminum Copper alloy
Weight / Size	Socket 1 inch Weight (g) S mm L mm Aluminum Bronze Beryllium Copper 22 55 330 361 24 44 340 372 25 55 345 377 26 55 350 383 27 55 360 394 28 55 363 397 29 55 365 399 30 60 405 443 31 60 410 448 32 60 440 481 34 60 455 497 36 65 500 550 38 65 560 620 41 70 625 690 46 75 740 850 50 75 760 850 55 80 1000 1160 60 85 1260 1390 65 90 1580 1750 70 90 1950 2150 75 95 2430 2680 80 95 2800 3080 Socket 1 inch Weight (g) S inch L mm Aluminum Bronze Beryllium Copper 1-1/16 55 360 394 1-1/8 55 364 398 1-3/16 60 405 442 1-1/4 60 431 470 1-5/16 60 442 483 1-3/8 60 448 490 1-7/16 65 500 560 1-1/2 65 560 620 1-5/8 70 625 690 1-7/8 75 740 850 2 75 850 960 2-1/4 80 1130 1250 2-1/2 90 1550 1700 2-3/4 90 1850 2050 3 95 2500 2750	Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
Warranty	12 Months unless specified otherwise	Origin	China

Non-sparking 1" Heavy Sockets:

Uses: In flammable and explosive places, used in places with special positions and narrow spaces, used in spaces where adjustable wrenches and open wrenches cannot be used, used for fastening or removing hexagon bolts and nuts.

Material : Beryllium bronze alloy, Aluminum Copper alloy.

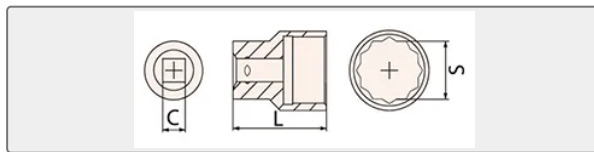

Socket 1 inch		Weight (g)	
S mm	L mm	Aluminum Bronze	Beryllium Copper
			 0.068701s

22	55	330	361
24	44	340	372
25	55	345	377
26	55	350	383
27	55	360	394
28	55	363	397
29	55	365	399
30	60	405	443
31	60	410	448
32	60	440	481
34	60	455	497
36	65	500	550
38	65	560	620
41	70	625	690
46	75	740	850
50	75	760	850
55	80	1000	1160
60	85	1260	1390
65	90	1580	1750
70	90	1950	2150
75	95	2430	2680
80	95	2800	3080

Socket 1 inch		Weight (g)	
S inch	L mm	Aluminum Bronze	Beryllium Copper
1-1/16	55	360	394
1-1/8	55	364	398
1-3/16	60	405	442
1-1/4	60	431	470
1-5/16	60	442	483
1-3/8	60	448	490
1-7/16	65	500	560



1-1/2	65	560	620
1-5/8	70	625	690
1-7/8	75	740	850
2	75	850	960
2-1/4	80	1130	1250
2-1/2	90	1550	1700
2-3/4	90	1850	2050
3	95	2500	2750