

# Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

MARINE TOOLS


## Non-sparking 3/4 inch Sockets


Non-sparking 3/4 inch Sockets: Uses: In flammable and explosive places, used in places with special positions and narrow spaces, used in spaces where adjustable wrenches and open wrenches cannot be used, use...

ISO9001 Supplier

Class Certificate

Export Supply

	<h3>Key Highlights</h3>	
	<b>Category</b>	Marine Tools
	<b>Standard</b>	EN
	<b>Material</b>	Beryllium bronze alloy, Aluminum Copper alloy
	<b>Weight / Size</b>	Socket 3/4 inch Weight (g) S mm L mm Aluminum Bronze Beryllium Copper 17...
<b>Certificate</b>	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	
We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.		




Technical Specifications			
<b>Category</b>	Marine Tools	<b>Model / SKU</b>	Non-sparking-3-4-inch-Sockets
<b>Standard</b>	EN	<b>Material</b>	Beryllium bronze alloy, Aluminum Copper alloy
<b>Weight / Size</b>	Socket 3/4 inch Weight (g) S mm L mm Aluminum Bronze Beryllium Copper 17 50 225 246 19 50 225 246 21 55 245 268 22 55 245 268 23 55 280 306 24 55 280 307 26 55 280 307 27 55 285 312 28 55 310 339 29 55 320 350 30 60 370 410 31 60 380 430 32 60 410 465 34 60 440 480 36 60 465 510 38 60 510 555 41 65 640 660 46 65 690 765 50 70 825 910 Socket 3/4 inch Weight (g) S inch L mm Aluminum Bronze Beryllium Copper 3/4 5055 220 240 13/16 55 240 262 7/8 55 245 267 15/16 55 280 305 1 55 280 310 1-1/16 55 285 315 1-1/8 55 315 345 1-3/16 60 365 400 1-1/4 60 400 437 1-5/16 60 430 472 1-3/8 60 470 515 1-7/16 60 480 525 1-1/2 60 530 580 1-5/8 65 640 702 1-3/4 65 695 761 1-13/16 65 705 830 1-7/8 65 750 850 2 70 870 965	<b>Certificate</b>	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
<b>Warranty</b>	12 Months unless specified otherwise	<b>Origin</b>	China


### Non-sparking 3/4 inch Sockets:

Uses: In flammable and explosive places, used in places with special positions and narrow spaces, used in spaces where adjustable wrenches and open wrenches cannot be used, used for fastening or removing hexagon bolts and nuts.

Material : Beryllium bronze alloy, Aluminum Copper alloy.

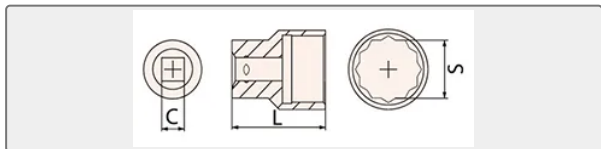

Socket 3/4 inch		Weight (g)	
S mm	L mm	Aluminum Bronze	Beryllium Copper



17	50	225	246
19	50	225	246
21	55	245	268
22	55	245	268
23	55	280	306
24	55	280	307
26	55	280	307
27	55	285	312
28	55	310	339
29	55	320	350
30	60	370	410
31	60	380	430
32	60	410	465
34	60	440	480
36	60	465	510
38	60	510	555
41	65	640	660
46	65	690	765
50	70	825	910

Socket 3/4 inch		Weight (g)	
S inch	L mm	Aluminum Bronze	Beryllium Copper
3/4	5055	220	240
13/16	55	240	262
7/8	55	245	267
15/16	55	280	305
1	55	280	310
1-1/16	55	285	315
1-1/8	55	315	345
1-3/16	60	365	400
1-1/4	60	400	437
1-5/16	60	430	472



1-3/8	60	470	515
1-7/16	60	480	525
1-1/2	60	530	580
1-5/8	65	640	702
1-3/4	65	695	761
1-13/16	65	705	830
1-7/8	65	750	850
2	70	870	965