

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

MARINE TOOLS

Non-sparking Impact Sockets

Non-sparking Impact Sockets: Uses: In flammable and explosive places, used in places with special positions and narrow spaces, used in spaces where adjustable wrenches and open wrenches cannot be used, used ...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Marine Tools
Standard	EN
Material	Beryllium bronze alloy, Aluminum Copper alloy
Weight / Size	Socket 3/4 inch Weight (g) S mm L mm Aluminum Bronze Beryllium Copper 24...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.




Technical Specifications			
Category	Marine Tools	Model / SKU	Non-sparking-Impact-Sockets
Standard	EN	Material	Beryllium bronze alloy, Aluminum Copper alloy
Weight / Size	Socket 3/4 inch Weight (g) S mm L mm Aluminum Bronze Beryllium Copper 24 50 330 380 27 53 365 405 30 53 390 440 32 56 425 475 36 56 585 650 41 60 625 695 46 60 700 770 50 70 1000 1100 Socket 1 inch Weight (g) S mm L mm Aluminum Bronze Beryllium Copper 19 55 570 630 21 55 580 640 22 55 590 650 24 55 600 660 26 55 660 735 27 55 670 735 29 60 690 760 30 60 690 765 32 60 700 775 34 60 700 775 35 60 700 775 36 60 700 775 38 65 780 865 41 65 830 930 46 70 1265 1380 50 75 1320 1455 52 75 1550 1715 55 75 1650 1830 58 85 1900 2080 60 85 2000 2200 65 85 2250 2460 70 90 2600 2890 75 90 2900 3155 80 90 3200 3560 Socket 1-3/16 inch Weight (g) S mm L mm Aluminum Bronze Beryllium Copper 50 90 1755 1930 52 90 1835 2005 55 90 1965 2180 58 90 2000 2200 60 90 2085 2290 65 90 2370 2610 70 90 2585 2840 75 90 2880 3190 80 90 3250 3605 Socket 1-1/4 inch Weight (g) S mm L mm Aluminum Bronze Beryllium Copper 50 90 1765 1950 60 90 2100 2300 70 90 2475 2750 Socket 1-1/2 inch Weight (g) S mm L mm Aluminum Bronze Beryllium Copper 55 90 2300 2530 60 90 2500 2750 65 95 2850 3130 70 95 3100 3400 75 100 3400 3740 80 100 3800 4180 85 110 4200 4620 90 110 4490 4940	Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
Warranty	12 Months unless specified otherwise	Origin	China



Non-sparking Impact Sockets:


Uses: In flammable and explosive places, used in places with special positions and narrow spaces, used in spaces where adjustable wrenches and open wrenches cannot be used, used for fastening or removing hexagon bolts and nuts.

Material : Beryllium bronze alloy, Aluminum Copper alloy.

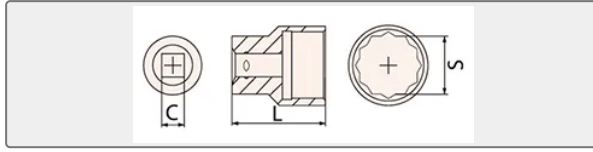

Socket 3/4 inch		Weight (g)	
S mm	L mm	Aluminum Bronze	Beryllium Copper
24	50	330	380
27	53	365	405
30	53	390	440
32	56	425	475
36	56	585	650
41	60	625	695
46	60	700	770
50	70	1000	1100

Socket 1 inch		Weight (g)	
S mm	L mm	Aluminum Bronze	Beryllium Copper
19	55	570	630
21	55	580	640
22	55	590	650
24	55	600	660
26	55	660	735
27	55	670	735
29	60	690	760
30	60	690	765
32	60	700	775
34	60	700	775
35	60	700	775



36	60	700	775
38	65	780	865
41	65	830	930
46	70	1265	1380
50	75	1320	1455
52	75	1550	1715
55	75	1650	1830
58	85	1900	2080
60	85	2000	2200
65	85	2250	2460
70	90	2600	2890
75	90	2900	3155
80	90	3200	3560

Socket 1-3/16 inch		Weight (g)	
S mm	L mm	Aluminum Bronze	Beryllium Copper
50	90	1755	1930
52	90	1835	2005
55	90	1965	2180
58	90	2000	2200
60	90	2085	2290
65	90	2370	2610
70	90	2585	2840
75	90	2880	3190
80	90	3250	3605

Socket 1-1/4 inch		Weight (g)	
S mm	L mm	Aluminum Bronze	Beryllium Copper
50	90	1765	1950
60	90	2100	2300
70	90	2475	2750

Socket 1-1/2 inch		Weight (g)	
S mm	L mm	Aluminum Bronze	Beryllium Copper
55	90	2300	2530
60	90	2500	2750
65	95	2850	3130
70	95	3100	3400
75	100	3400	3740
80	100	3800	4180
85	110	4200	4620
90	110	4490	4940