

# Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

MARINE DECK COVERING

## Open Deck Covering

Main Specification No. Item name Index Standard 1 Initial setting time ≥1h...

ISO9001 Supplier

Class Certificate

Export Supply

### Key Highlights

<b>Category</b>	Marine Deck Covering
<b>Standard</b>	EN
<b>Material</b>	Dry material (A component):
<b>Weight / Size</b>	Item name Index Standard 1 Initial setting time ≥1h Q/HCF1-2004 2 Final ...
<b>Certificate</b>	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications			
<b>Category</b>	Marine Deck Covering	<b>Model / SKU</b>	Open-Deck-Covering
<b>Standard</b>	EN	<b>Material</b>	Dry material (A component):
<b>Weight / Size</b>	Item name Index Standard 1 Initial setting time ≥1h Q/HCF1-2004 2 Final setting time ≤12h 3 Modulus of rapture ≥5MPa 4 Compressive strength ≥10MPa 5 Density ≤2000kg/m3 6 Water absorption ≤10% 7 Oil absorption ≤5% 8 Heat conductivity -30~70°C 9 Not readily ignitability, smoke & toxicity ≤35kg/15mm/m2 10 Weight per square meter Feature Characteristic:	<b>Certificate</b>	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
<b>Warranty</b>	12 Months unless specified otherwise	<b>Origin</b>	China




**CONTENTS**

■ Main Specification

■ Feature

■ Consume amount:

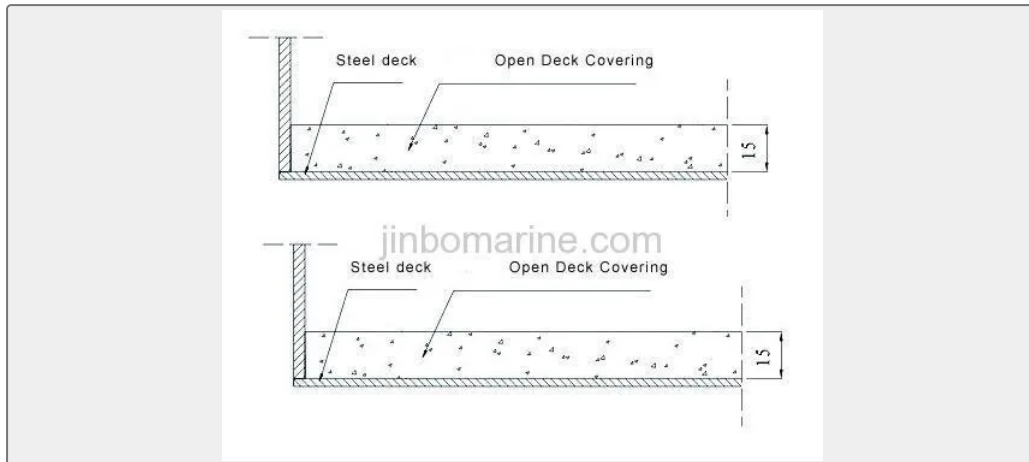

## Main Specification

No.	Item name	Index	Standard
1	Initial setting time	≥1h	Q/HCF1-2004
2	Final setting time	≤12h	
3	Modulus of rupture	≥5MPa	
4	Compressive strength	≥10MPa	
5	Density	≤2000kg/m <sup>3</sup>	
6	Water absorption	≤10%	
7	Oil absorption	≤5%	
8	Heat conductivity	-30~70°C	
9	Not readily ignitability, smoke & toxicity	≤35kg/15mm/m <sup>2</sup>	
10	Weight per square meter		

## Feature

**Characteristic:** Abrasion resistance, heat insulation, low line shrinkage

**Applied:** Covering for open deck (outdoor and wheelhouse top)

## Consume amount:

35 kg/m<sup>2</sup>

**Packing:** Dry material (A component): 30kg/pack; Liquid(B component): 9kg/barrel

**Storage:** Cool and dry place, moisture-proof, the quality guarantee period is 6 months