

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

MARINE CONSERVATION

RDHS-500 Hermetic Sampler

RDHS series Hermetic Samplers are designed for closed sampling of liquid. The sampled liquid can be transferred under closed condition. This transfer guarantees the integrity of the sample, since the liquid is never in c...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category Marine Conservation

Standard EN

Weight / Size The series type of Hermetic Samplers have two sizes of 1" and 2", and t...

Certificate CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	Marine Conservation	Model / SKU	RDHS-500-Hermetic-Sampler
Standard	EN	Weight / Size	The series type of Hermetic Samplers have two sizes of 1" and 2", and their quick connectors can be easier connected to the 1" or the 2" deck valve on board.
Certificate	CCS	Warranty	12 Months unless specified otherwise
Origin	China		

CONTENTS

- China RDHS-500 Hermetic Sampler:
- Application Scope
- Technical Specification
- Our Service


China RDHS-500 Hermetic Sampler:

RDHS series Hermetic Samplers are designed for closed sampling of liquid. The sampled liquid can be transferred under closed condition. This transfer guarantees the integrity of the sample, since the liquid is never in contact with the atmosphere.

The series type of Hermetic Samplers have two sizes of 1" and 2", and their quick connectors can be easily connected to the 1" or the 2" deck valve on board.

Application Scope

The RDHS-500 hermetic sampler is suitable to take the liquid sample of different liquid level from liquid cabins and tanks on board as well as other tank system. It also has the features of high sampling precision and sampling in the corrosion, alkaline and acid condition.

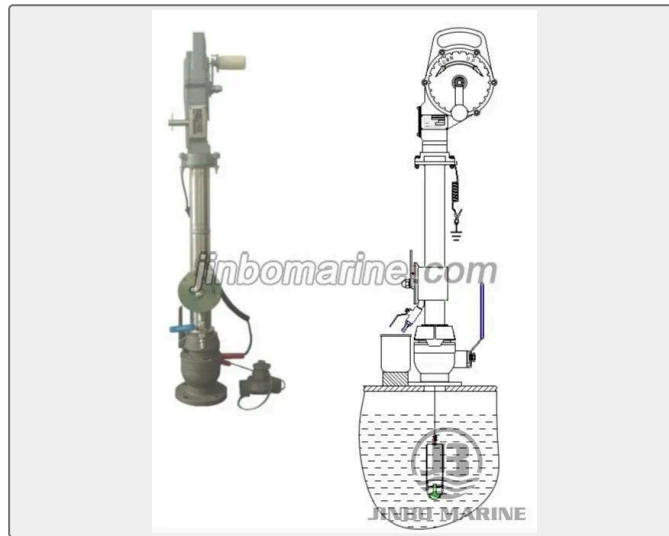

Technical Specification

Form: portable

Type: RDHS-500

Flexible rule specification: length of 30 m, minimum value at 1 mm

Density scope of sample medium: 0.6~3.5g/cm³

Medium temperature range: -25°C~+110°C

Working pressure:

Sample barrel volume:

Suitable connector:

Weight: 8kg

External dimensions: 1000×250×150 (mm)

Our Service

1. 100% factory tested before shipment.
2. Any Inquiries will be replied within 24 hours.
3. Supply of chemicals, filter elements, membranes and other consumable spare parts.
4. One year quality warranty unless specified otherwise.
5. Professional and reliable supplier.
6. Good After Sale Service:

- 1).All products will have been strictly Quality Checked before packing.
- 2).All products will be well packed before shipping.
7. Fast delivery.