

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

MARINE FENDER

Rolling Rubber Fender

It is commonly used on the berth corners and dock entrances, also widely installed along the walls of dry docks and other restricted channels to help guide vessels and prevent hull damage. The wheel is mounted on a...

- ISO9001 Supplier
- Class Certificate
- Export Supply



Key Highlights

| | |
|---------------|--|
| Category | Marine Fender |
| Standard | EN |
| Material | rubber |
| Weight / Size | Size: |
| Certificate | ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS |

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


Technical Specifications

| | | | |
|---------------|--------------------------------------|-------------|--|
| Category | Marine Fender | Model / SKU | Rolling-Rubber-Fender |
| Standard | EN | Material | rubber |
| Weight / Size | Size: | Certificate | ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS |
| Warranty | 12 Months unless specified otherwise | Origin | China |

| | | |
|----------|--------------------------------|------------------|
| CONTENTS | ■ China Rolling Rubber Fender: | ■ Feature: |
| | ■ Size: | ■ Specification: |

China Rolling Rubber Fender:

It is commonly used on the berth corners and dock entrances, also widely installed along the walls of dry docks and other restricted channels to help guide vessels and prevent hull damage.



The wheel is mounted on a fixed axle supported by a special frame. And wheel can be rotated freely when the ship hull contact / slid the along with the wheel . Roller Fenders combine reasonable energy absorption with low reaction at all berthing angles.


Roller fender is low maintenance frame design and easy installation.

Feature:

The fender performance is free from the influence of ship.


Inclining and berthing,applicable for dry docks.

Size:

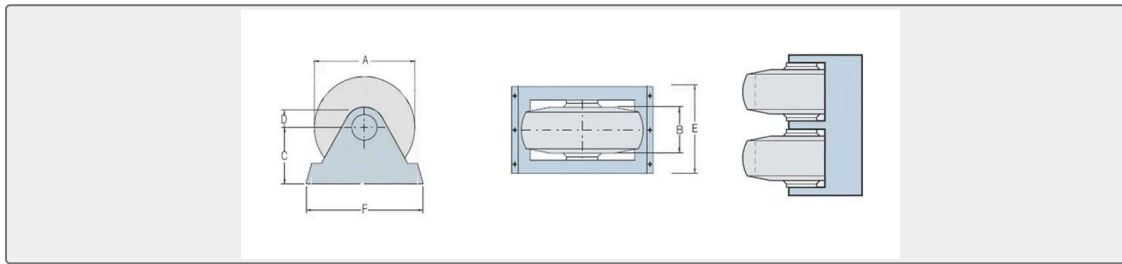

Specification:

| Model No | A | B | C | D | E | F | Weight |
|-----------|------|-----|------|-----|------|------|--------|
| D1-060-20 | 600 | 200 | 320 | 110 | 420 | 695 | 120 |
| D1-075-25 | 750 | 250 | 400 | 140 | 510 | 870 | 230 |
| D1-090-30 | 900 | 300 | 480 | 165 | 610 | 1040 | 410 |
| D1-120-40 | 1200 | 400 | 640 | 220 | 820 | 1380 | 980 |
| D1-150-50 | 1500 | 500 | 800 | 275 | 1010 | 1740 | 1810 |
| D1-180-60 | 1800 | 600 | 960 | 330 | 1210 | 2080 | 3130 |
| D1-210-70 | 2100 | 700 | 1155 | 385 | 1410 | 2440 | 4800 |
| D1-240-80 | 2400 | 800 | 1280 | 440 | 1610 | 2770 | 6040 |
| D2-060-20 | 600 | 200 | 320 | 110 | 770 | 695 | 210 |
| D2-075-25 | 750 | 250 | 400 | 140 | 935 | 870 | 420 |
| D2-090-30 | 900 | 300 | 480 | 165 | 1120 | 1040 | 775 |
| D2-120-40 | 1200 | 400 | 640 | 220 | 1500 | 1380 | 1770 |
| D2-150-50 | 1500 | 500 | 800 | 275 | 1850 | 1740 | 3330 |
| D2-180-60 | 1800 | 600 | 960 | 330 | 2215 | 2080 | 5720 |
| D2-210-70 | 2100 | 700 | 1155 | 385 | 2590 | 2440 | 9750 |
| D2-240-80 | 2400 | 800 | 1280 | 440 | 2950 | 2770 | 12400 |
| D3-060-20 | 600 | 200 | 320 | 110 | 1120 | 695 | 310 |
| D3-075-25 | 750 | 250 | 400 | 140 | 1360 | 870 | |



| | | | | | | | |
|-----------|------|-----|------|-----|------|------|-------|
| D3-090-30 | 900 | 300 | 480 | 165 | 1630 | 1040 | 1080 |
| D3-120-40 | 1200 | 400 | 640 | 220 | 2180 | 1380 | 2550 |
| D3-150-50 | 1500 | 500 | 800 | 275 | 2690 | 1740 | 850 |
| D3-180-60 | 1800 | 600 | 960 | 330 | 3220 | 2080 | 8400 |
| D3-210-70 | 2100 | 700 | 1155 | 385 | 3770 | 2440 | 13670 |
| D3-240-80 | 2400 | 800 | 1280 | 440 | 4290 | 2770 | 18390 |