

LIFEBOAT AND RESCUE BOAT ACCESSORIES

SCT-24200-430 Marine Charging Power Supply

ISO9001 Supplier

Class Certificate

Export Supply

SCT-24200-430 Marine Charging Power Supply SC series marine power supplies are switch-mode charging power supplies applying high-frequency PWM pulse-duration modulation technology and mainly composed o...



Key Highlights

Category	Lifeboat And Rescue Boat Accessories
Standard	GB
Weight / Size	500Vac/10mA/1 min Insulation resistance $\geq 10M\Omega$ Other Overall dimensions ...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


Technical Specifications

Category	Lifeboat And Rescue Boat Accessories	Model / SKU	SCT-24200-430-Marine-Charging-Power-Supply
Standard	GB	Weight / Size	500Vac/10mA/1 min Insulation resistance $\geq 10M\Omega$ Other Overall dimensions 310*190*90mm 410*260*110mm 530*280*230mm Installation dimensions 295*160mm 385*234mm 510*200mm Weight 5Kg 8Kg 25Kg
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		


China SCT-24200-430 Marine Charging Power Supply:

SCT-24200-430 Marine Charging Power Supply



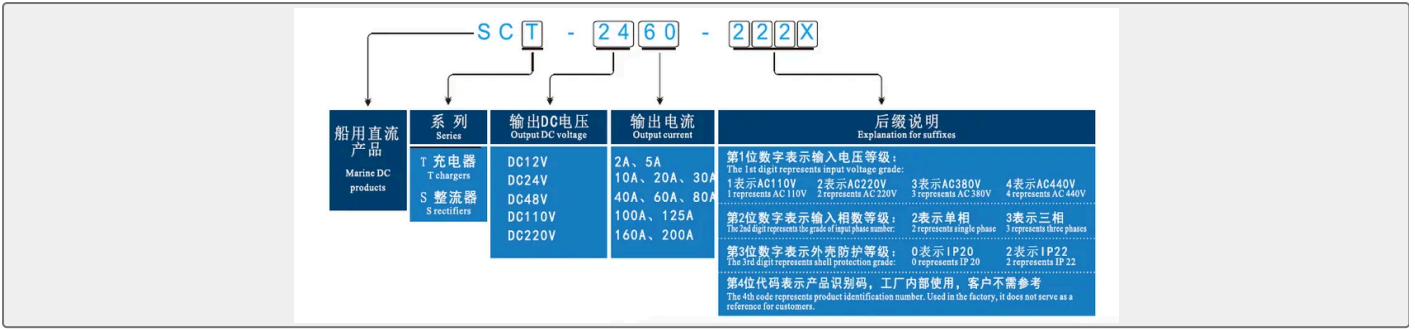

SC series marine power supplies are switch-mode charging power supplies applying high-frequency PWM pulse-duration modulation technology and mainly composed of IGBT, fieleffect power tube and integrated PWM controller. The complete machine adoptsintelligent cooling.The reliable operation of power supplies can be ensured even in the hottest cabin. Power supplies meet all specifications and rules of China Classification Society, comply with the basic standards of marineelectric andspecifications, pass Type Approval of China Classification Society.and accord with the relevant regulations of GB7061-98 General Specification for Low-Voltage Switchgear and Controlgear Assemblies in Ships GB/T14548-93 General Specification for Marine Semiconductor Convertors and Rules for Classification of Sea-going Seel Ships

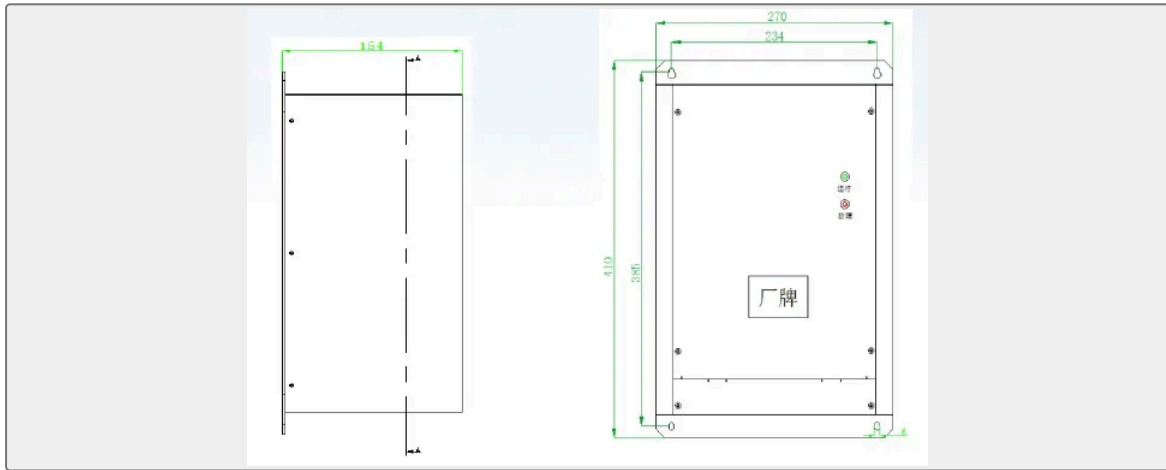

Model SCT-		2420-	2430-	2440-	2460-	2480-	24100-	24200-							
Input	Input rated voltage (±15%)	(220) single-phase 220Vac (230 three-phase 220Vac (330) three-phase 330Vac (430) three-phase 440Vac													
	Input frequency range	45~65Hz													
Maximum input current		22 0	6A	22 0	8.5A	22 0	9A	22 0	20A	22 0	23A	22 0	25A	22 0	38A
		23 0		23 0		23 0		23 0		23 0		23 0		23 0	
		33 0	< 3A	33 0	< 4.2A	33 0	< 5A	33 0	< 9A	33 0	< 11A	33 0	< 13A	33 0	< 26A
		43 0		43 0		43 0		43 0		43 0		43 0		43 0	
Efficiency		85%													



Out put	Output float charge voltage	26.4Vdc						
	Output average charge voltage	28.2Vdc						
	Average and float charge conversion current	1/10 of output current±1A						
	Maximun output current	20±1A	30±1A	40±1A	60±1A	80±1A	100±1A	200±1A
	Stabilized voltage precision	±1%						
	Output ripple and noise	VPP≤500mv						
Ptecti on	Output overvoltage protection	30±1Vdc						
	Output undervoltage alarm	21±1Vdc						
	Overheat protection	85±5°C (Temperature inside the machine)						
	Output short circuit protection	The device is free from damage after short circuit and antomatically recovers after the removal of short circuit						
Funcio n	Output Alarm port	The relay completes contact action when input poer supply is normal and the device works The relay resets in the case of device fault(maximum contact voltage and current 32V 1A)						
Enviro ment	Operating temperature	0°C~+55°C						
	Storage temperature	-10°C~+70°C						
	Relative temperature	≤95% of salt mist, oil mist and mold						
	Heat emission method	Air Cooling						
	Atmospheric pressure	86kPa~106kPa						
Safety Regulat ion	Dielectric strength	Input single-phase and three-phase 220Vac	Input three-phase and three-phase 220Vac					
		Input to output: 1500Vac/10mA/1 min	Input to output: 2500Vac/10mA/1 min					
		Input to the ground: 1500Vac/10mA/1 min	Input to the ground: 1500Vac/10mA/1 min					
		Output to the ground: 500Vac/10mA/1 min	Output to the ground: 500Vac/10mA/1 min					
	Insulation resistance	≥10MΩ						
Other	Overall dimnensions	310*190*90mm	410*260*110mm	530*280*230mm				
	Installation dimensions	295*160mm	385*234mm	510*200mm				
	Weight	5Kg	8Kg	25Kg				