

OTHER MARINE VALVES & ACCESSORIES

SF8 Pressure Selector Valve

SF8 Pressure Selector Valve Principle : Ambient temperature -25 ~ +80 °C Port connection type Metric thread Nominal pressure 25 bar Nominal flow rate 20 L/min ...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Other Marine Valves & Accessories
Standard	ISO
Weight / Size	Ambient temperature -25 ~ +80 °C Port connection type Metric thread ...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


Technical Specifications

Category	Other Marine Valves & Accessories	Model / SKU	SF8-Pressure-Selector-Valve
Standard	ISO	Weight / Size	Ambient temperature -25 ~ +80 °C Port connection type Metric thread Nominal pressure 25 bar Nominal flow rate 20 L/min Reduced pressure port pressure 15 bar Hydraulic oil temperature range -20 ~ +100 °C Viscosity range 10 ~ 380 mm²/s Permitted fluid contamination level -/19/16 (ISO 4406:1999) Weight 2.1 kg Size :
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

China SF8 Pressure Selector Valve:

SF8 Pressure Selector Valve

Principle :

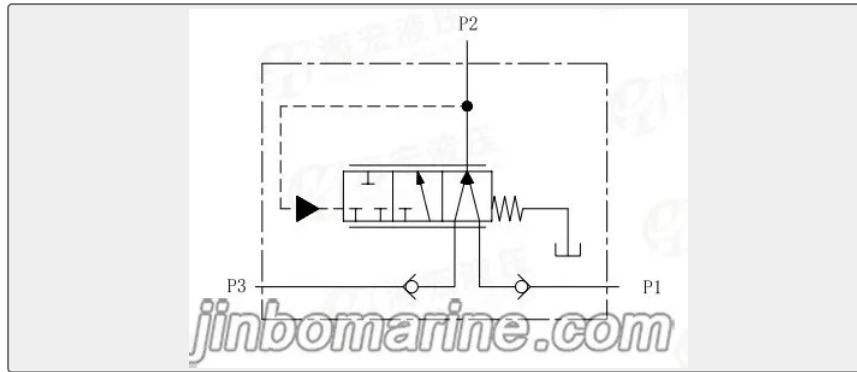

Ambient temperature	-25 ~ +80 °C
Port connection type	Metric thread
Nominal pressure	25 bar
Nominal flow rate	20 L/min
Reduced pressure port pressure	15 bar
Hydraulic oil temperature range	-20 ~ +100 °C
Viscosity range	10 ~ 380 mm²/s
Permitted fluid contamination level	-/19/16 (ISO 4406:1999)
Weight	2.1 kg

Size :

