

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

IEC 60092 STANDARD CABLE (KOREA TYPE)


SXXI Fire Resistant Marine Power & Control Unarmoured Cable 0.6/1KV (Light Weig

ISO9001 Supplier

Class Certificate

Export Supply

SXXI Marine Power and Control Cable are Fire-resistant and Light Weight Cable, with tinned copper wire braided. Cable Construction Conductor: Tinned Copper. IEC 60228 Class 2 Mi...

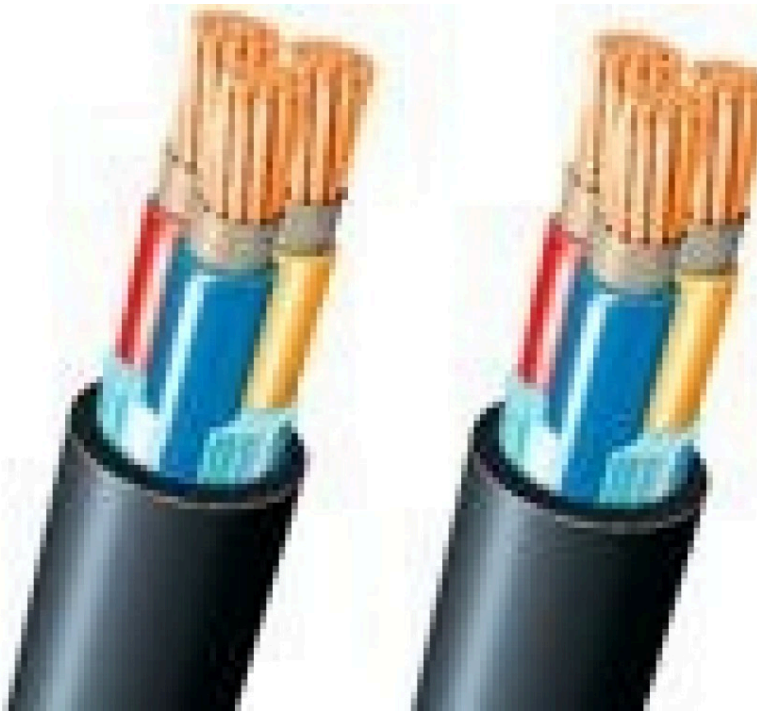

Key Highlights

Category	IEC 60092 Standard Cable (Korea Type)
Standard	EN
Material	Tinned Copper/XLPE insulation/Halogen-free Thermoplastic Polyolefin shea...
Weight / Size	SXXI Marine Power and Control Cable are Fire-resistant and Light Weight ...
Certificate	ABS, LR, BV, GL, RINA, DNV, NK, KR, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	IEC 60092 Standard Cable (Korea Type)	Model / SKU	SXXI-Fire-Resistant-Marine-Power-Control-Unarmoured-Cable-0-6-1KV-Light-Weig
Standard	EN	Material	Tinned Copper/XLPE insulation/Halogen-free Thermoplastic Polyolefin sheath
Weight / Size	SXXI Marine Power and Control Cable are Fire-resistant and Light Weight Cable, with tinned copper wire braided.	Certificate	ABS, LR, BV, GL, RINA, DNV, NK, KR, CCS
Warranty	12 Months unless specified otherwise	Origin	China

 0.039178s

CONTENTS

- China SXXI Fire Resistant Marine Power & Control Unarmoured Cable 0.6/1KV (Light Weig:
- Standards
- Feature
- Cable Construction
- Cores & Size
- Application

China SXXI Fire Resistant Marine Power & Control Unarmoured Cable 0.6/1KV (Light Weig:



SXXI Marine Power and Control Cable are Fire-resistant and Light Weight Cable, with tinned copper wire braided.

Cable Construction

Conductor: Tinned Copper. IEC 60228 Class 2

Mica Tape

Insulation : XLPE Insulation

Inner Covering: None

Armour : None

Outer Sheath : Halogen-free Thermoplastic Polyolefin(SHF1)

Standards

Design : IEC 60092-350, 353

Insulation Material : IEC 60092 -351

Sheath Material : IEC 60092-359

Flammability: IEC 60332-1 & IEC 60332-3 Category A


Halogen--free: IEC60754-1, IEC60754-2

Smoke Emission: IEC 61034-1, IEC61034-2

Cores & Size

Cores: 1, 2,3,4,5,7,10,12,14,16,19,24

Size (sqmm): 1.5, 2.5, 4, 6, 10, 16, 25, 35, 50, 70, 95, 120, 150, 180, 240, 300



Feature

Halogen-free, Low Smoke, Flame retardant

Application

The cable is fixed installation on ships and offshore units, used for power, lighting and control.

