

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

SHACKLE

Safety Bow Shackle G2130

US Type Bolt Anchor Shackle G2130 Forged Shackle High Tensile force Standard: U.S Type 4/6 Times Working Load Main Specification Nomin...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Shackle
Standard	EN
Weight / Size	U.S Type 4/6 Times Working Load Main Specification Nominal Size Working ...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS


We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications			
Category	Shackle	Model / SKU	Safety-Bow-Shackle-G2130
Standard	EN	Weight / Size	U.S Type 4/6 Times Working Load Main Specification Nominal Size Working Load Dimensions Weight (in.) (tons) A B C D E F H L N (lbs.) 3/16 1/3 0.38 0.25 0.88 0.19 0.6 0.56 1.47 0.98 0.19 0.06 1/4 1/2 0.47 0.31 1.13 0.25 0.78 0.61 1.84 1.28 0.25 0.11 5/16 3/4 0.53 0.38 1.22 0.31 0.84 0.75 2.09 1.47 0.31 0.22 3/8 1 0.66 0.44 1.44 0.38 1.03 0.91 2.49 1.78 0.38 0.33 7/16 1 1/2 0.75 0.5 1.69 0.44 1.16 1.06 2.91 2.03 0.44 0.49 1/2 2 0.81 0.64 1.88 0.5 1.31 1.19 3.28 2.31 0.5 0.79 5/8 3 1/4 1.06 0.77 2.38 0.63 1.69 1.5 4.19 2.94 0.69 1.68 3/4 4 3/4 1.25 0.89 2.81 0.75 2 1.81 4.97 3.5 0.81 2.72 7/8 6 1/2 1.44 1.02 3.31 0.88 2.28 2.09 5.83 4.03 0.97 3.95 8 1/2 1.69 1.15 3.75 1 2.69 2.38 6.56 4.69 1.06 5.66 1/8 9 1/2 1.81 1.25 4.25 1.13 2.91 2.69 7.47 5.16 1.25 8.27 1/4 12 2.03 1.4 4.69 1.29 3.25 3 8.25 5.75 1.38 11.71 3/8 13 1/1 2.25 1.53 5.25 1.42 3.63 3.31 9.16 6.38 1.5 15.83 1/2 17 2.38 1.66 5.75 1.53 3.88 3.63 10 6.88 1.62 19 3/4 25 2.88 2.04 7 1.84 5 4.19 12.34 8.8 2.25 33.91 2 35 3.25 2.3 7.75 2.08 5.75 4.81 13.68 10.15 2.4 52.25 2.5 55 4.13 2.8 10.5 2.71 7.25 5.69 17.9 12.75 3.13 98.25 3 85 5 3.3 13 3.12 7.88 6.5 21.5 14.62 3.62 154 3.5 120 5.25 3.76 14.63 3.62 9 8 24.88 17.02 4.38 265 4 150 5.5 4.26 14.5 4 10 9 25.68 18 4.56 338
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

CONTENTS	<ul style="list-style-type: none"> ■ China Safety Bow Shackle G2130: ■ Main Specification
-----------------	---



China Safety Bow Shackle G2130:

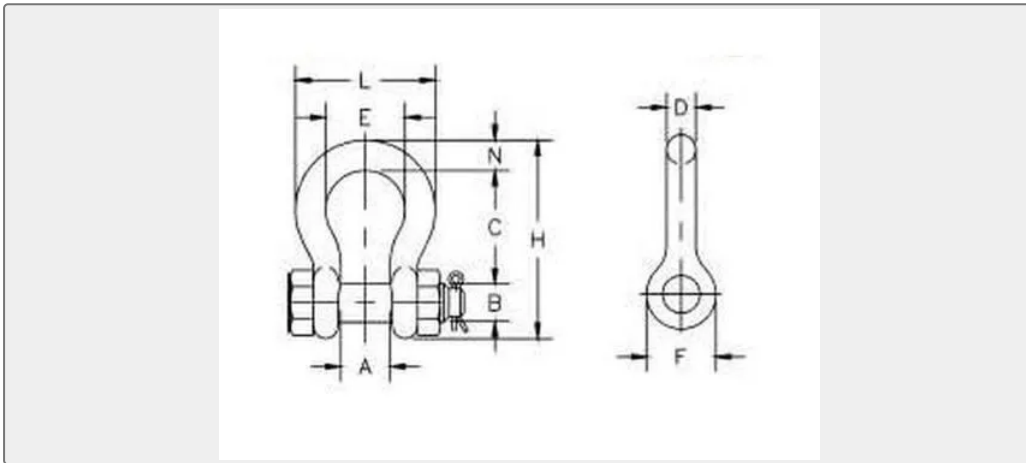

US Type Bolt Anchor Shackle G2130

Forged Shackle

High Tensile force

Standard: U.S Type

4/6 Times Working Load

Main Specification

Nominal Size	Working Load	Dimensions									Weight
(in.)	(tons)	A	B	C	D	E	F	H	L	N	(lbs.)
3/16	1/3	0.38	0.25	0.88	0.19	0.6	0.56	1.47	0.98	0.19	0.06
1/4	1/2	0.47	0.31	1.13	0.25	0.78	0.61	1.84	1.28	0.25	0.11
5/16	3/4	0.53	0.38	1.22	0.31	0.84	0.75	2.09	1.47	0.31	0.22
3/8	1	0.66	0.44	1.44	0.38	1.03	0.91	2.49	1.78	0.38	0.33
7/16	1 1/2	0.75	0.5	1.69	0.44	1.16	1.06	2.91	2.03	0.44	0.49
1/2	2	0.81	0.64	1.88	0.5	1.31	1.19	3.28	2.31	0.5	0.79
5/8	3 1/4	1.06	0.77	2.38	0.63	1.69	1.5	4.19	2.94	0.63	0.042358s

3/4	4 3/4	1.25	0.89	2.81	0.75	2	1.81	4.97	3.5	0.81	2.72
7/8	6 1/2	1.44	1.02	3.31	0.88	2.28	2.09	5.83	4.03	0.97	3.95
1	8 1/2	1.69	1.15	3.75	1	2.69	2.38	6.56	4.69	1.06	5.66
1 1/8	9 1/2	1.81	1.25	4.25	1.13	2.91	2.69	7.47	5.16	1.25	8.27
1 1/4	12	2.03	1.4	4.69	1.29	3.25	3	8.25	5.75	1.38	11.71
1 3/8	13 1/1	2.25	1.53	5.25	1.42	3.63	3.31	9.16	6.38	1.5	15.83
1 1/2	17	2.38	1.66	5.75	1.53	3.88	3.63	10	6.88	1.62	19
1 3/4	25	2.88	2.04	7	1.84	5	4.19	12.34	8.8	2.25	33.91
2	35	3.25	2.3	7.75	2.08	5.75	4.81	13.68	10.15	2.4	52.25
2.5	55	4.13	2.8	10.5	2.71	7.25	5.69	17.9	12.75	3.13	98.25
3	85	5	3.3	13	3.12	7.88	6.5	21.5	14.62	3.62	154
3.5	120	5.25	3.76	14.63	3.62	9	8	24.88	17.02	4.38	265
4	150	5.5	4.26	14.5	4	10	9	25.68	18	4.56	338