

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

MARINE QUICK RELEASE HOOK

Shark Jaw

It applies to lead hawser for mooring ships. Can be made from cast steel, cast iron or other material. Compact design and precision machined. Certificate: ABS, BV, CCS etc. Feature: ...

ISO9001 Supplier

Class Certificate

Export Supply

	Key Highlights	
	Category	Marine Quick Release Hook
	Standard	EN
	Material	Can be made from cast steel, cast iron or other material.
	Weight / Size	With hydraulic pump station, the electrical box, control panel 6. Certifi...
	Certificate	ABS , BV, DNV , LR , GL , CCS, RINA , mill certificate etc.
<p>We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.</p>		


Technical Specifications

Category	Marine Quick Release Hook	Model / SKU	Shark-Jaw
Standard	EN	Material	Can be made from cast steel, cast iron or other material.
Weight / Size	With hydraulic pump station, the electrical box, control panel 6. Certification: CCS BV ABS etc MAX MAX SWL A B H TYPE WIRE DIA (mm) CHAIN SIZE (mm) (mm) (mm) (mm) SJ-J80 45 40 80 1600 1500 400 SJ-J100 52 54 100 1920 1760 420 SJ-J200 72 78 200 2200 2080 630 SJ-J350 96 105 350 2750 2400 650 SJ-J400 110 114 400 3400 2620 700	Certificate	ABS , BV, DNV , LR , GL , CCS, RINA , mill certificate etc.
Warranty	12 Months unless specified otherwise	Origin	China

 0.035560s

CONTENTS	■ China Shark Jaw:	■ Feature:
	■ Remark:	

China Shark Jaw:

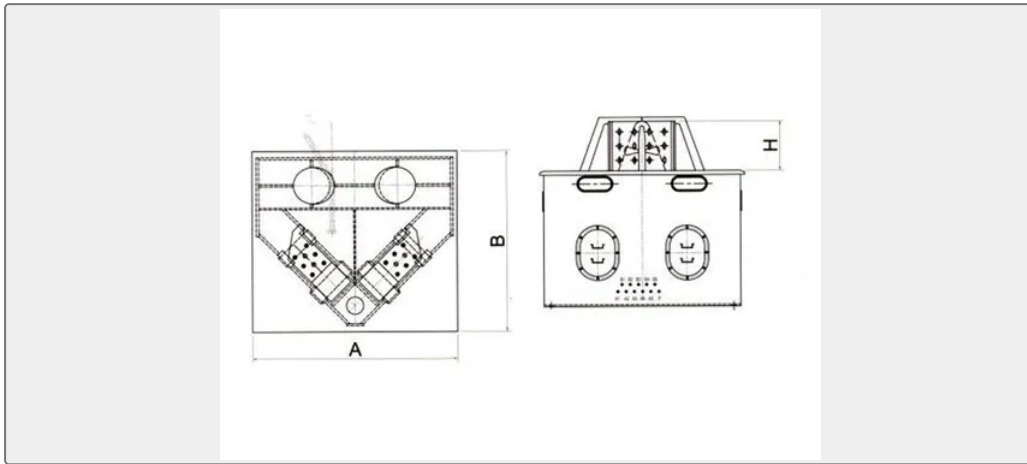

It applies to lead hawser for mooring ships.

Can be made from cast steel, cast iron or other material.

Compact design and precision machined.

Certificate: ABS, BV, CCS etc.

Feature:

1. Excellent quality.
2. Competitive price .
3. Durable, long lifetime.
4. Certificate: CCS BV ABS.

Remark:

1. Test work load: 2350 KN
2. Chain breaking load: 2940 KN
3. Working pressure: 18 MPa , work power: 22 Kw
4. Control: Local & wheelhouse remote control panel
5. With hydraulic pump station, the electrical box, control panel
6. Certification: CCS BV ABS etc

MAX	MAX	SWL	A	B	H	
TYPE	WIRE DIA (mm)		CHAIN SIZE (mm)	(mm)	(mm)	(mm)
SJ-J80	45	40	80	1600	1500	400
SJ-J100	52	54	100	1920	1760	420
SJ-J200	72	78	200	2200	2080	450



SJ-J350	96	105	350	2750	2400	650
SJ-J400	110	114	400	3400	2620	700

