

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

CHAIN SLING


Slingle leg spliced wire rope sling

VC-Whole set of spliced wire rope sling Sling legs (S-Single leg, D-Double legs, F-four legs)
Fittings (H-hook) Steel Wire Rope Diameter Effective length of steel wire rope The
specification...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Chain Sling
Standard	DIN
Material	Galvanized Steel Wire Rope
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications			
Category	Chain Sling	Model / SKU	Slingle-leg-spliced-wire-rope-sling
Standard	DIN	Material	Galvanized Steel Wire Rope
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

China Slingle leg spliced wire rope sling:

VC-Whole set of spliced wire rope sling

Sling legs (S-Single leg, D-Double legs, F-four legs)

Fittings (H-hook)


Steel Wire Rope Diameter

Effective length of steel wire rope

The specification of the steel wire in the form with the working load is : 6*37+FC-1670;

Different construction rope with different working load, we can calculate the working load of the steel wire rope construction that the customer required.

According to the Standard GB/T16271-1996.

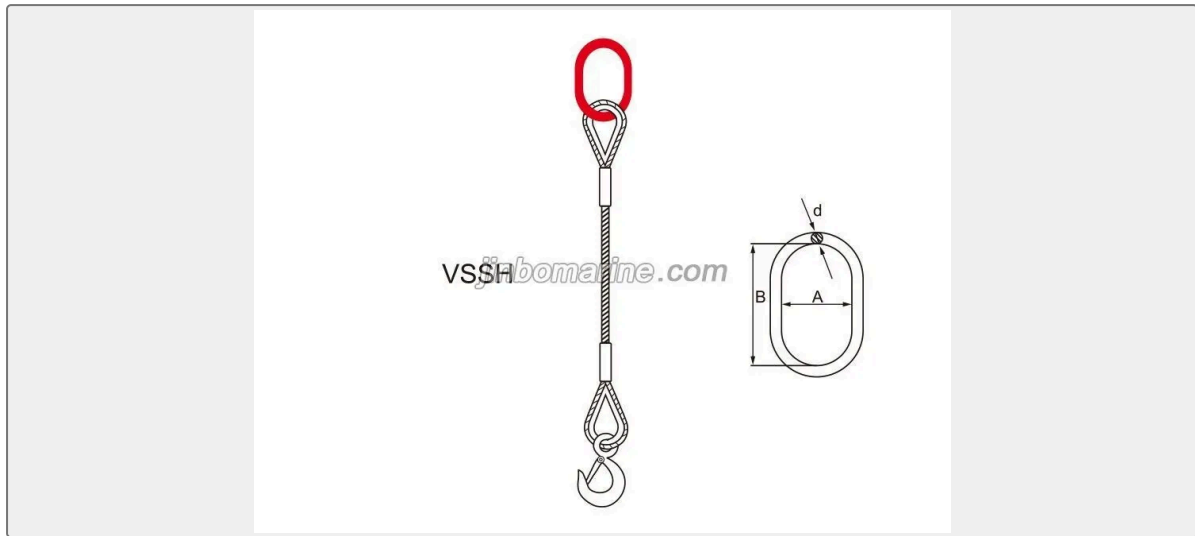

Products type	Dia of rope(d) (mm)	Working load limit (kN)	A×B×d (mm)	Hook	
VAF06	6	3.2	76×152×16	(US) S6	0.75
VAF07	7	4.3	76×152×16	(US) S6	0.75
VAF08	8	5.7	76×152×16	(US) S6	0.75
VAF09	9	7.2	76×152×16	(US) S6	0.75
VAF10	10	8.9	76×152×16	(US) S6	1
VAF11	11	11	76×152×16	(US) S6	1.5
VAF12	12	13	76×152×16	(US) S6	1.5
VAF13	13	15	76×152×16	(US) S6	1.5
VAF14	14	17	76×152×16	(US) S6	2
VAF16	16	23	90×160×22	(US) S6	3
VAF18	18	29	90×160×22	(US) S6	3
VAF20	20	35	90×160×22	(US) S6	5
VAF22	22	43	90×160×22	(US) S6	5
VAF24	24	51	111×222×32	(US) S6	7.5
VAF26	26	60	111×222×32	(US) S6	7.5
VAF28	28	69	111×222×32	(US) S6	7.5
VAF30	30	80	111×222×32	(US) S6	10
VAF32	32	91	111×222×32	(US) S6	10
VAF34	34	102	111×222×32	(EYE)	15

VAF36	36	115	111×222×32	(EYE)	15
VAF38	38	128	135×267×38	(EYE)	15
VAF40	40	142	135×267×38	(EYE)	15
VAF42	42	157	152×305×45	(EYE)	22
VAF44	44	172	152×305×45	(EYE)	22
VAF46	46	187	152×305×45	(EYE)	22
VAF48	48	203	152×305×45	(EYE)	22
VAF50	50	221	152×305×45	(EYE)	30
VAF52	52	239	152×305×45	(EYE)	30
VAF54	54	258	180×355×51	(EYE)	30
VAF56	56	277	180×355×51	(EYE)	30
VAF58	58	298	180×355×51	(EYE)	37
VAF60	60	319	180×355×51	(EYE)	37