

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

NAVIGATION BUOY

Steel Navigation Buoy

Steel Navigation Buoy used as Navigation Marks in Ocean, Inland River and Offshore Oil Platform, diameter is from 0.5M to 8M. Main Specification Type Dia...

- ISO9001 Supplier
- Class Certificate
- Export Supply



Key Highlights

Category	Navigation Buoy
Material	Steel
Weight / Size	Main Specification Type Dia. (m) Lamp Bracket(m) Focal Plane Height(m) La...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.




Technical Specifications			
Category	Navigation Buoy	Model / SKU	Steel-Navigation-Buoy
Material	Steel	Weight / Size	Main Specification Type Dia.(m) Lamp Bracket(m) Focal Plane Height(m) Lamp Draught(m) Buoy Depth(m) Weight(T) JB0.8-D1 0.8 1.0-1.5 1.5-2.0 LED 0.5-1.5 3.5-15 0.6 JB1.0-D1 1 1.5-2.0 2.0-2.5 LED 1.5-1.5 3.5-15 0.8 JB1.2-D1 1.2 2.0-3.0 2.5-3.5 LED 1.5-2.8 3.5-15 0.9 JB1.5-D1 1.5 2.0-3.0 2.5-3.5 LED 1.5-2.8 3.5-15 1.2 JB1.8-D1 1.8 3.0-4.0 3.6-4.8 LED 1.5-2.8 6-25 1.8 JB2.4-D1 2.4 3.0- 4.0 3.5-5.5 LED 2.0-3.0 13-40 4.2 JB3.0-D1 3 3.5-5.0 4.5-6.0 LED 2.0-3.0 13-40 4.8 JB3.6-D1 3.6 3.5-5.0 4.5-6.0 LED 2.0-3.0 13-40 5.8 JB6.0-D1 6 4.5-6.0 4.5-6.0 LED 2.0-3.0 13-40 * JB8.0-D1 8 6.0-12 6.0-12 LED 2.0-3.0 20-80 *
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

CONTENTS	<input type="checkbox"/> China Steel Navigation Buoy: <input checked="" type="checkbox"/> Main Specification
-----------------	--

China Steel Navigation Buoy:

Steel Navigation Buoy used as Navigation Marks in Ocean, Inland River and Offshore Oil Platform, diameter is from 0.5M to 8M.

Main Specification

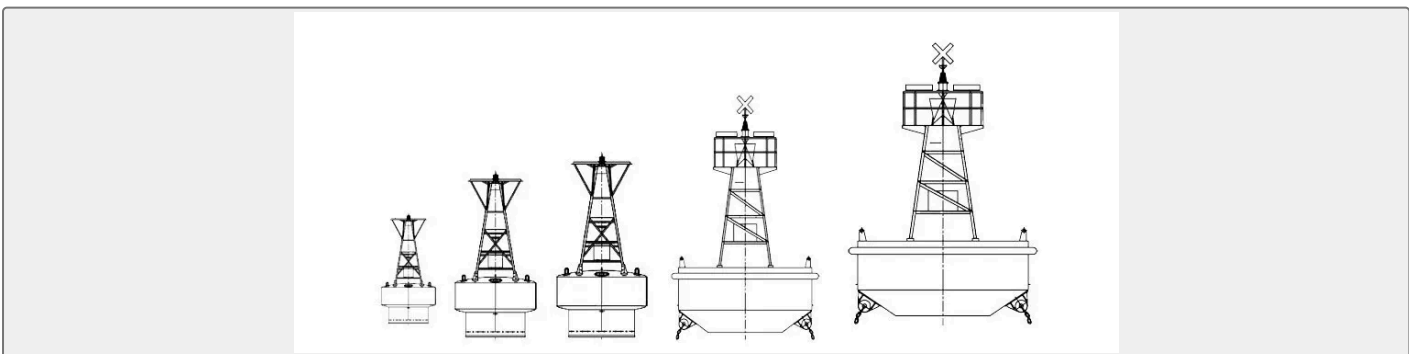

Type	Dia.(m)	Lamp Bracket(m)	Focal Plane Height(m)	Lamp	Draught(m)	Buoy Depth(m)	Weight(T)
------	---------	-----------------	-----------------------	------	------------	---------------	-----------



JB0.8-D1	0.8	1.0-1.5	1.5-2.0	LED	0.5-1.5	3.5-15	0.6
JB1.0-D1	1	1.5-2.0	2.0-2.5	LED	1.5-1.5	3.5-15	0.8
JB1.2-D1	1.2	2.0-3.0	2.5-3.5	LED	1.5-2.8	3.5-15	0.9
JB1.5-D1	1.5	2.0-3.0	2.5-3.5	LED	1.5-2.8	3.5-15	1.2
JB1.8-D1	1.8	3.0-4.0	3.6-4.8	LED	1.5-2.8	6-25	1.8
JB2.4-D1	2.4	3.0-4.0	3.5-5.5	LED	2.0-3.0	13-40	4.2
JB3.0-D1	3	3.5-5.0	4.5-6.0	LED	2.0-3.0	13-40	4.8
JB3.6-D1	3.6	3.5-5.0	4.5-6.0	LED	2.0-3.0	13-40	5.8
JB6.0-D1	6	4.5-6.0	4.5-6.0	LED	2.0-3.0	13-40	*
JB8.0-D1	8	6.0-12	6.0-12	LED	2.0-3.0	20-80	*