

# Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

## CHAIN SLING

# Steel Plate Lifting Chain Sling

Description The parameter of chain in the table is in accordance with JB/T8108.1-1999Grade(8) The wibe rope uses the chain link with the shackle The length of pressed wire rope sling=50times of the dia ...

ISO9001 Supplier

Class Certificate

Export Supply



## Key Highlights

Category	Chain Sling
Standard	EN
Material	High Quality Alloy Steel
Weight / Size	Technical Data Model Diamerter ( mm ) WLL(t) Wire rope weight (kg) Chain ...
Certificate	CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications			
<b>Category</b>	Chain Sling	<b>Model / SKU</b>	Steel-Plate-Lifting-Chain-Sling
<b>Standard</b>	EN	<b>Material</b>	High Quality Alloy Steel
<b>Weight / Size</b>	Technical Data Model Diameter ( mm ) WLL(t) Wire rope weight (kg) Chain weight ( kg ) chain Wire rope Room temperature High temperature YLSP-6 6 10 2 1 0.6 0.79 YLSP-8 8 13 3 1.5 1.1 1.38 YLSP-10 10 16 5 2.5 1.8 2.2 YLSP-12 12 20 7 3.5 3.2 3.1 YLSP-14 14 24 10 5 5.2 4.13 YLSP-16 16 26 12 6 6.4 4.63 YLSP-18 18 28 16 8 8.78 6.85 YLSP-20 20 32 20 10 11.1 8.6 YLSP-22 22 36 24 12 15.3 10.2 YLSP-24 24 40 28 14 20.3 12.78 YLSP-26 26 44 34 17 27.7 14.87 YLSP-30 30 48 44 22 35.2 19.6 YLSP-34 34 56 72 36 46.5 22.7	<b>Certificate</b>	CCS
<b>Warranty</b>	12 Months unless specified otherwise	<b>Origin</b>	China

<b>CONTENTS</b>	<ul style="list-style-type: none"> <li>■ Description</li> <li>■ Technical Data</li> </ul>
-----------------	---


## Description

The parameter of chain in the table is in accordance with JB/T8108.1-1999Grade(8)

The wire rope uses the chain link with the shackle

The length of pressed wire rope sling=50times of the dia of wire rope.

## Technical Data

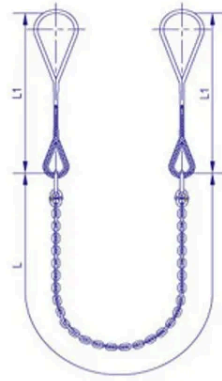

Model	Diameter ( mm )		WLL(t)		Wire rope weight (kg)	Chain weight ( kg )
	chain	Wire rope	Room temperature	High temperature		
YLSP-6	6	10	2	1	0.6	0.79
YLSP-8	8	13	3	1.5	1.1	1.38
YLSP-10	10	16	5	2.5	1.8	2.2
YLSP-12	12	20	7	3.5	3.2	3.1
YLSP-14	14	24	10	5	5.2	4.13
YLSP-16	16	26	12	6	6.4	4.63
YLSP-18	18	28	16	8	8.78	6.85
YLSP-20	20	32	20	10	11.1	8.6
YLSP-22	22	36	24	12	15.3	10.2
YLSP-24	24	40	28	14	20.3	12.78
YLSP-26	26	44	34	17	27.7	14.87
YLSP-30	30	48	44	22	35.2	19.6
YLSP-34	34	56	72	36	46.5	22.7